SECTION 5
EXPLODED VIEWS AND PARTS LIST

SAFETY PRECAUTION

Parts identified by the ⚠ symbol are critical for safety. Replace only with specified part numbers.

5.1 PACKING ASSEMBLY M1

- When shipped from the factory the switches and VR's are set as showm below tables.

NAME (FRONT PANLE)		POSITION
AUDIO MONITOR		MIX
		Hi-Fi
VIDEO INPUT (BR-S800)		Y/C 358
COUNTER		TC
REMOTE		LOCAL
METER SELECT		AUD-2/R
TRACKING VR		CENTER
LEVEL VR		CENTER
AUDIO REC LEVEL VR (BR-S800)	NORM (AUD-1)	CENTER
	NORM (AUD-2)	CENTER
	Hi-Fi (L)	CENTER
	Hi-Fi (R)	CENTER
SEARCH DIAL		STILL

NAME (REAR PANEL)	POSITION
TIMER	OFF

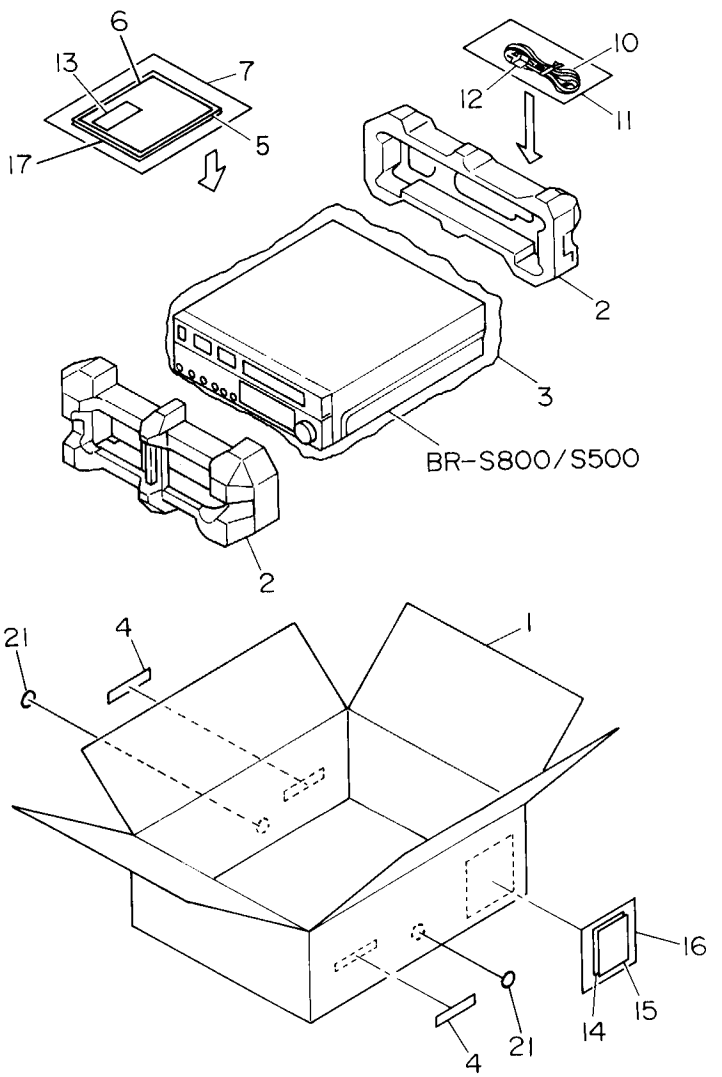

PACKING ASSEMBLY LIST M1

M1MM□□□□

Symbol No.	Part No.	Part Name	Description
1	PRD20487-03-03	PACKING CASE	BR-S800U
1	PRD20487-04-03	PACKING CASE	BR-S500U
2	PRD10321A-02	CUSHION ASS'Y	
3	PUM30021-24	POLY BAG	
4	PRD43892	LABEL	×2
⚠ 5	PGD30002-440-02	INST BOOK	
6	SL96005	CTL TIME CODE GUIDE BOOK	
7	QPGA025-03505	POLY BAG	
⚠ 10	QMP9003-022	POWER CORD	
11	QPGB020-02804	POLY BAG	
12	PUP40003-7	AIR CAP	
13	PU33941-3-3	SAFTY GUIDE	
14	BT-51010-1	WARRANTY CARD	
15	BT20104A	TOLL FREE CARD	
16	PU54821	POLY BAG	
17	PRD44731-02	INST SHEET	
21	PRD44357-04	PACKING LABEL	×2

5.2 CABINET ASSEMBLY M 2

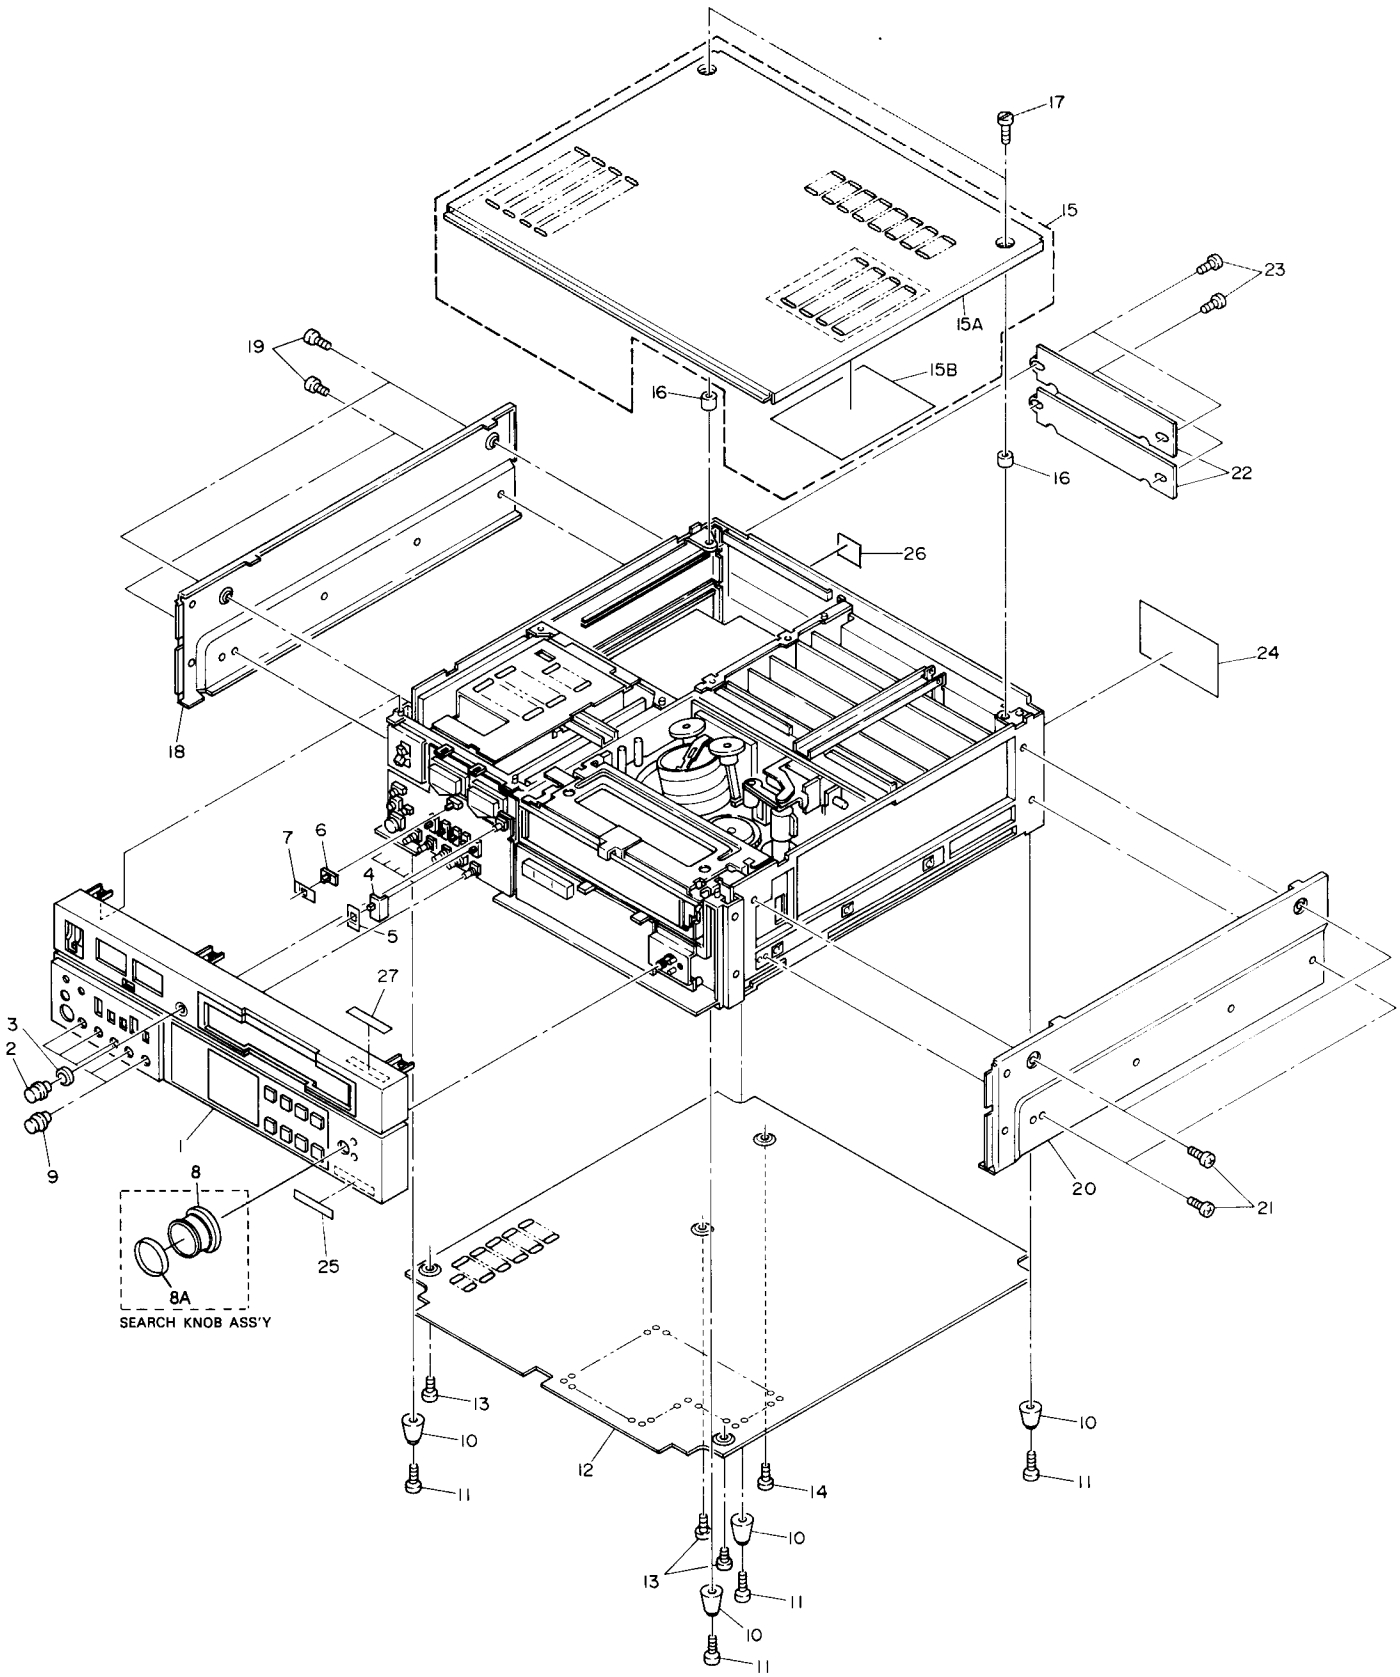

CABINET ASSEMBLY LIST M2

M2MM□□□□

Symbol No.	Part No.	Part Name	Description
1	PRD10320C-08	FRONT PANEL	BR-S800
1	PRD10320D-08	FRONT PANEL	BR-S500
2	PRD30889-01-02	VOLUME KNOB	TRACKING
3	PRD30029-08	WASHER	
4	PRD42830	SLIDE KNOB	×5 S800 ×4 S500
5	PRD43146	PLATE	×5 S800 ×4 S500
6	PRD43835	KNOB	
7	PRD42909-04	ADJUST PLATE	
8	PGD40035A-1	KNOB	SEARCH DIAL
8A	PGD40025	TIRE	
9	PRD31027	KNOB	×5 S800 ×1 S500, LEVEL VOLUME
10	QZF2319-001	FOOT	×4
11	SDSF3020Z	SCREW	M3×20, ×4
12	PRD10313	BOTTOM COVER	
13	SDSF3010Z	SCREW	M3×10, ×3
14	SDSP3006Z	SCREW	M3×6
15	PRD20498A-04	TOP COVER ASS'Y	
15A	PRD10310-01-06	TOP COVER	
15B	PRD44308	SHADE	
16	PGD40255	SPACER	×2
17	PRD30088-03	SCREW	×2
18	PRD10311-01-02	SIDE PANEL (L)	
19	SXST4008N	SPECIAL SCREW	×4
20	PRD10312-01-02	SIDE PANEL (R)	
21	SXST4008N	SPECIAL SCREW	×4
22	PRD31013	PANEL	×2
23	SDSP3014R	SCREW	M3×14, ×4
24	PRD30085-35-29	RATING LABEL	BR-S800
24	PRD30085-36-29	RATING LABEL	BR-S500
25	PQ40111-1-5	SERIAL NO. PLATE	
26	SS410172	CSA LABEL	
27	PRD44337-02	INFORMATION LABEL	

5.3 CHASSIS ASSEMBLY M 3

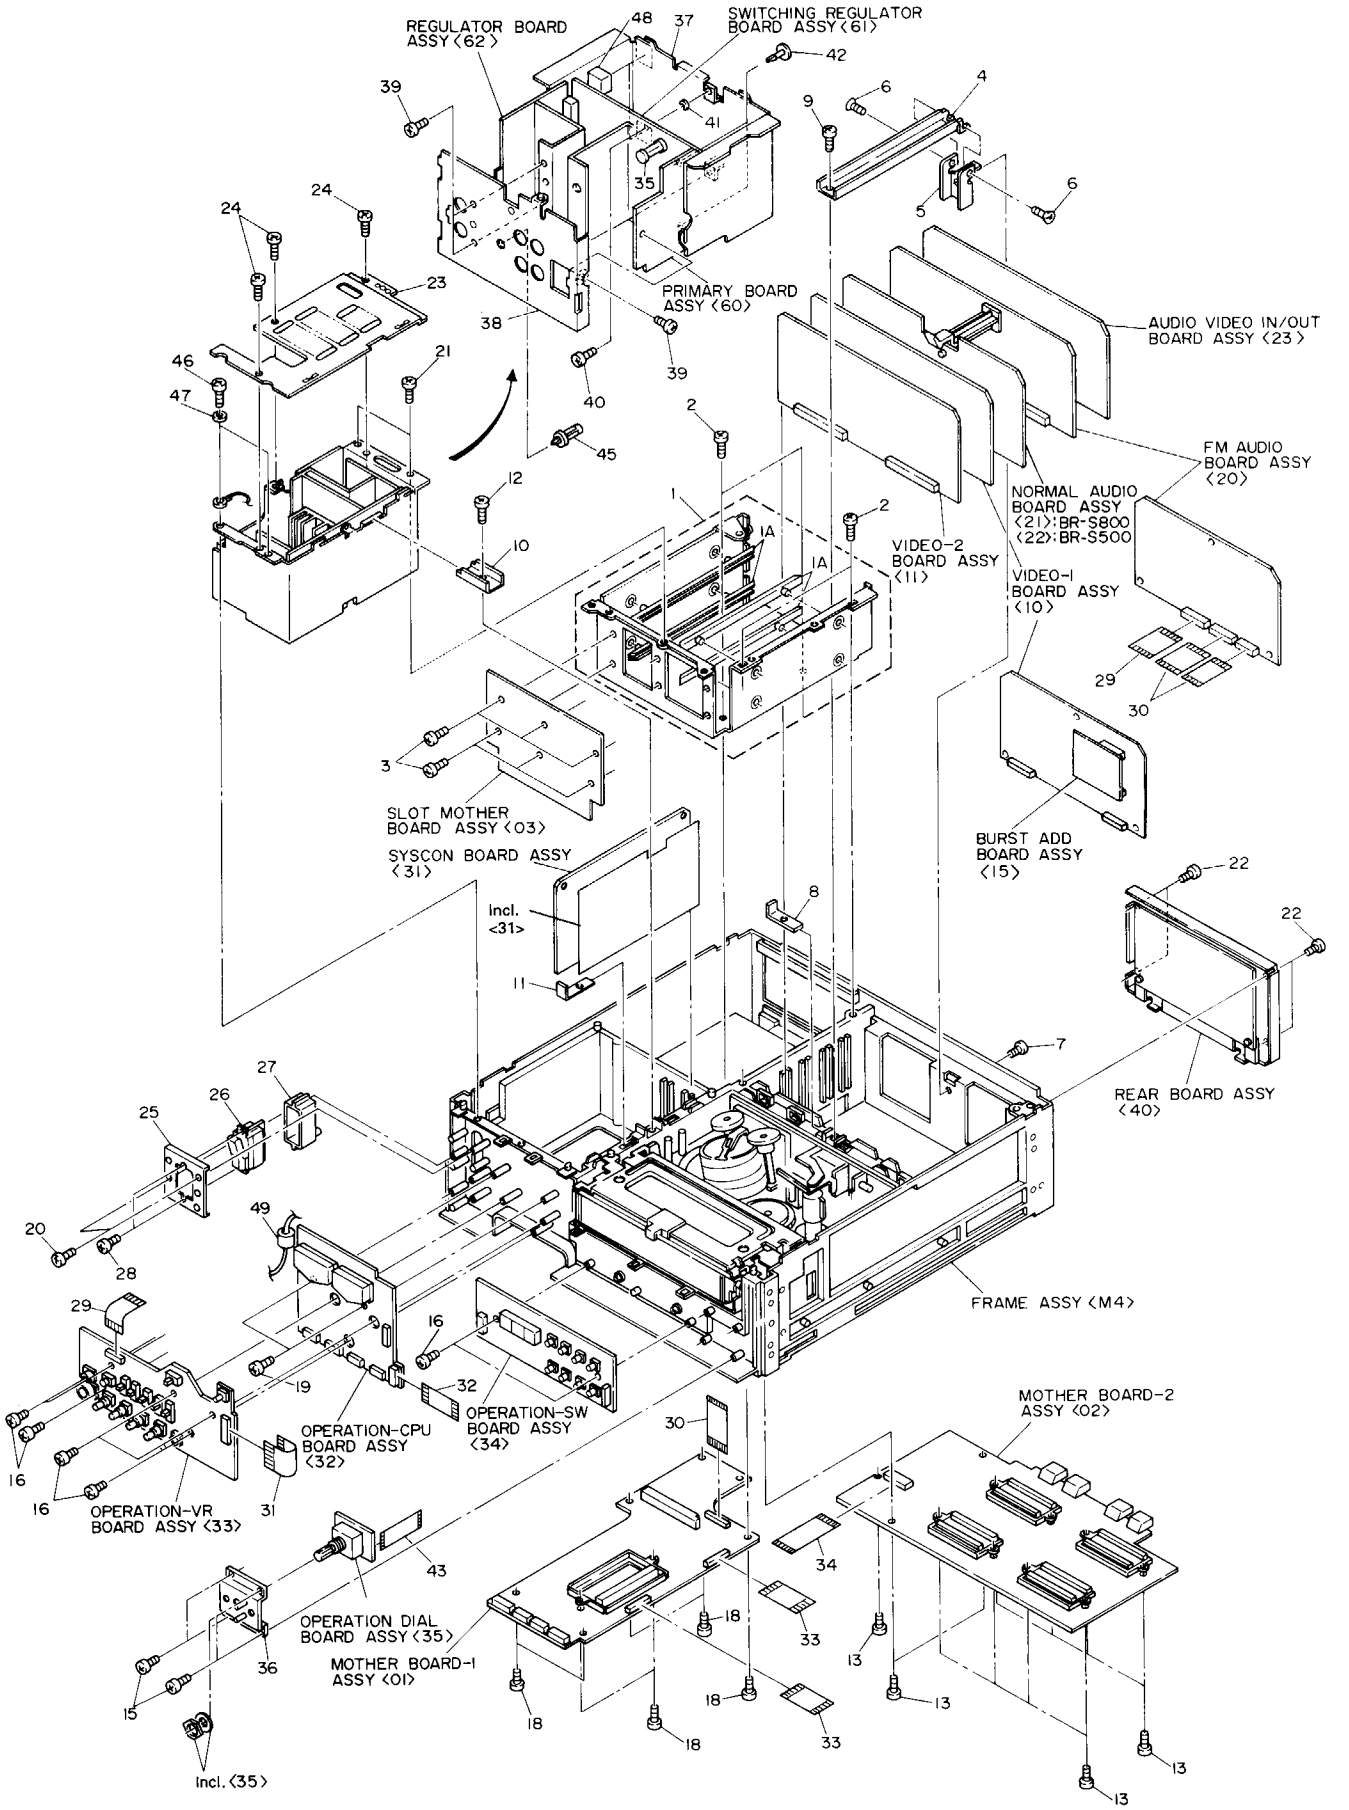
REGULATOR BOARD ASSY (62)
SWITCHING REGULATOR BOARD ASSY (61)
PRIMARY BOARD ASSY (60)
AUDIO VIDEO IN/OUT BOARD ASSY (23)
FM AUDIO BOARD ASSY (20)
NORMAL AUDIO BOARD ASSY (21):BR-S800 (22):BR-S500
VIDEO-2 BOARD ASSY (11)
VIDEO-1 BOARD ASSY (10)
BURST ADD BOARD ASSY (15)
REAR BOARD ASSY (40)
SLOT MOTHER BOARD ASSY (03)
SYSCON BOARD ASSY (31)
Incl. <31>
FRAME ASSY (M4)
OPERATION-CPU BOARD ASSY (32)
OPERATION-SW BOARD ASSY (34)
OPERATION-VR BOARD ASSY (33)
OPERATION DIAL BOARD ASSY (35)
Incl. (35)
MOTHER BOARD-1 ASSY (01)
MOTHER BOARD-2 ASSY (02)

CHASSIS ASSEMBLY LIST [M][3]

[M][3][M][M]□□□□

Symbol No.	Part No.	Part Name	Description
1	PRD20491A-01	HOLDER ASSY	
1A	PGZ00493-03	GUIDE RAIL	×4
2	SDSF3010Z	SCREW	M3×10, ×4
3	SDST3006Z	SCREW	M3×6, ×6
4	PRD31022-01-02	HOLDER(A)	
5	PRD44249	BRACKET (BOARD HOLDER)	
6	YQ40689	SPECIAL SCREW	×2
7	SDST2606Z	SCREW	M2.6×6
8	PRD44250	LEVER	
9	SDSP3010Z	SCREW	M3×10
10	PRD44252	HOLDER(B)	
11	PRD44250	LEVER	
12	SDSP3010Z	SCREW	M3×10
13	SDSF3010Z	SCREW	M3×10, ×11
15	SDSF3010Z	SCREW	M3×10, ×4
16	SDSF3010Z	SCREW	M3×10, ×8
18	SDSF3010Z	SCREW	M3×10, ×7
19	SDSF3010Z	SCREW	M3×10, ×2
20	SDSF3010Z	SCREW	M3×10, ×2
21	PRD44050-05	SCREW	×2
22	SDSF3010R	SCREW	M3×10, ×4
23	PRD31024	CASE2	
24	PRD44050-05	SPECIAL SCREW	×3
25	PRD44222	BRACKET (POWER SWITCH)	
26	PGZ00479	SEESAW SWITCH	
27	PRD42023	SWITCH COVER	
28	LPSP3006ZY	SCREW	M3×6, ×2
29	PGW0206-050180	WIRE	18 PIN
30	PGW0206-050300	WIRE	30 PIN
31	PGW0206-040180	WIRE	24 PIN
32	PGW0206-050240	WIRE	18 PIN
33	PGW0206-090180	WIRE	×2, 18 PIN
34	PGW0206-140300	WIRE	30 PIN
35	QMF51J1-1R6N	FUSE	
36	PRD44221	BRACKET	
37	PRD20489	CASE1	
38	PRD31019-01-03	HEAT SINK	
39	PRD44050-05	SCREW	×3
40	PRD44050-05	SCREW	×2
41	WBS3000N	WASHER	
42	PU60010-3	SPACER	×2
43	PGW0109-90AC556	WIRE	6 PIN
45	PGZ01128-02	SPACER	
46	SDSF3016Z	SCREW	M3×16, ×2
47	WLS3000N	WASHER	×2
48	PRD30030-132	PAD	×2
49	PGZ01229	FERRITE CORE	

5.4 FRAME ASSEMBLY M4

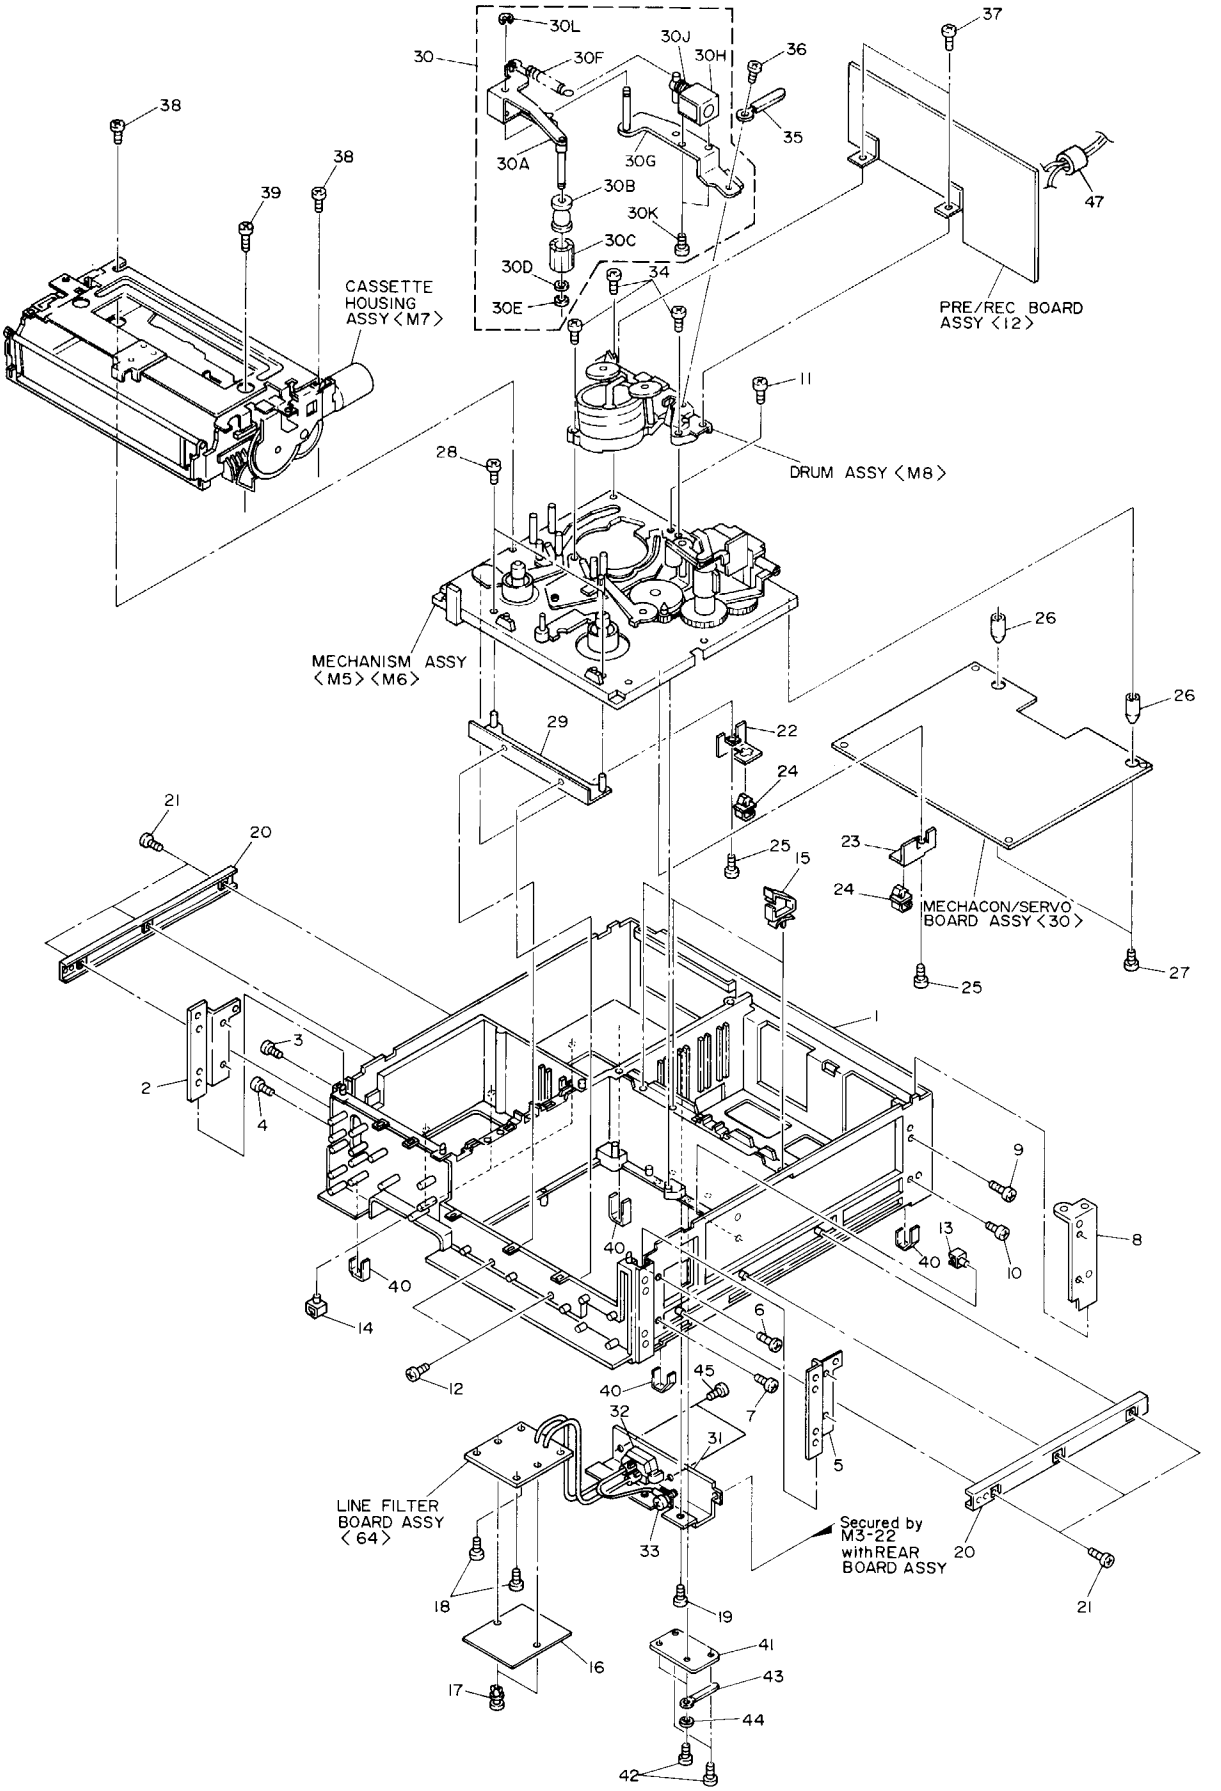

FRAME ASSEMBLY LIST M4

M4MM□□□□

Symbol No.	Part No.	Part Name	Description
1	PRD10319-01-05	BOTTOM CHASSIS	
2	PRD31000	BKT(F-LEFT)	
3	SDSP3006Z	SCREW	M3×6
4	SSSP3006Z	SCREW	M3×6
5	PRD31000-02	BKT(F-RIGHT)	
6	SDSP3006Z	SCREW	M3×6
7	SSSP3006Z	SCREW	M3×6
8	PRD30999	BKT(REAR)	
9	SDSP3006Z	SCREW	M3×6
10	SSSP3006Z	SCREW	M3×6
11	SDSF4025Z	SCREW	M4×25
12	DPSP4010Z	SCREW	M4×10, ×2
13	PU48016-2	M CLAMP	
14	PU59311-3	WIRE CLAMP	×3
15	PGZ00452	L WIRE SADOLE	×3
16	PRD44271	INSULATOR	
17	PGZ01951	PLASTIC RIVET	×2
18	SDSF3010Z	SCREW	M3×10, ×2
19	SDSP3006Z	SCREW	M3×6
20	PRD31016	BKT(RACK RAIL)	×2
21	SDSF3010Z	SCREW	M3×10, ×6
22	PRD44274	HINGE L	
23	PRD44275	HINGE R	
24	PGZ00606-03	P.W.B.HOLDER	×2
25	SDST2605Z	SCREW	M2.6×5, ×2
26	PGZ01961	SNAP COLLAR	×2
27	SSSG2622Z	SCREW	M2.6×22, ×2
28	PRD30082-02	SCREW	×2
29	PRD31017A	BKT ASS'Y	
30	PRD30797B	HEAD CLEANER AS	
30A	PRD43590B	ARM	
30B	PQ45689	ROLLER	
30C	PQ44837	HEAD CLEANER	
30D	Q03093-829	PLASTIC WASHER	
30E	PQM30017-25	SLIT WASHER	
30F	PRD30024-62	TENSION SPRING	
30G	PRD43591B	BRACKET	
30H	PGZ01973	SOLENOID ASSY	
30J	PRD30023-36	COMPRESS SPRING	
30K	SPSP2003ZY	SCREW	M2×3, ×2
30L	REE2500	E WASHER	
31	PRD31004-02	BKT(AC INLET)	
32	PGZ01945	AC INLET	
33	LPSP4006Z	SCREW	M4×6
34	LPSP2612Z	SCREW	M2.6×12, ×3
35	PU49485-4	WIRE CLAMP	
36	DPSP2606Z	SCREW	M2.6×6
37	DPSP2606ZY	SCREW	M2.6×6, ×2
38	PRD30027-04	SCREW	×2
39	SDSP2608Z	SCREW	M2.6×8
40	PRD30030-128	PAD	×4
41	PRD44317	BRACKET	
42	SDSF3010Z	SCREW	M3×10, ×4
43	PU49485-4	WIRE CLAMP	×2
44	WLS3000N	WASHER	×2
45	SDSF3010R	SCREW	M3×10, ×2
47	PU58903	FERRITE CORE	

5.5 MECHANISM-1 ASSEMBLY [M] [5]

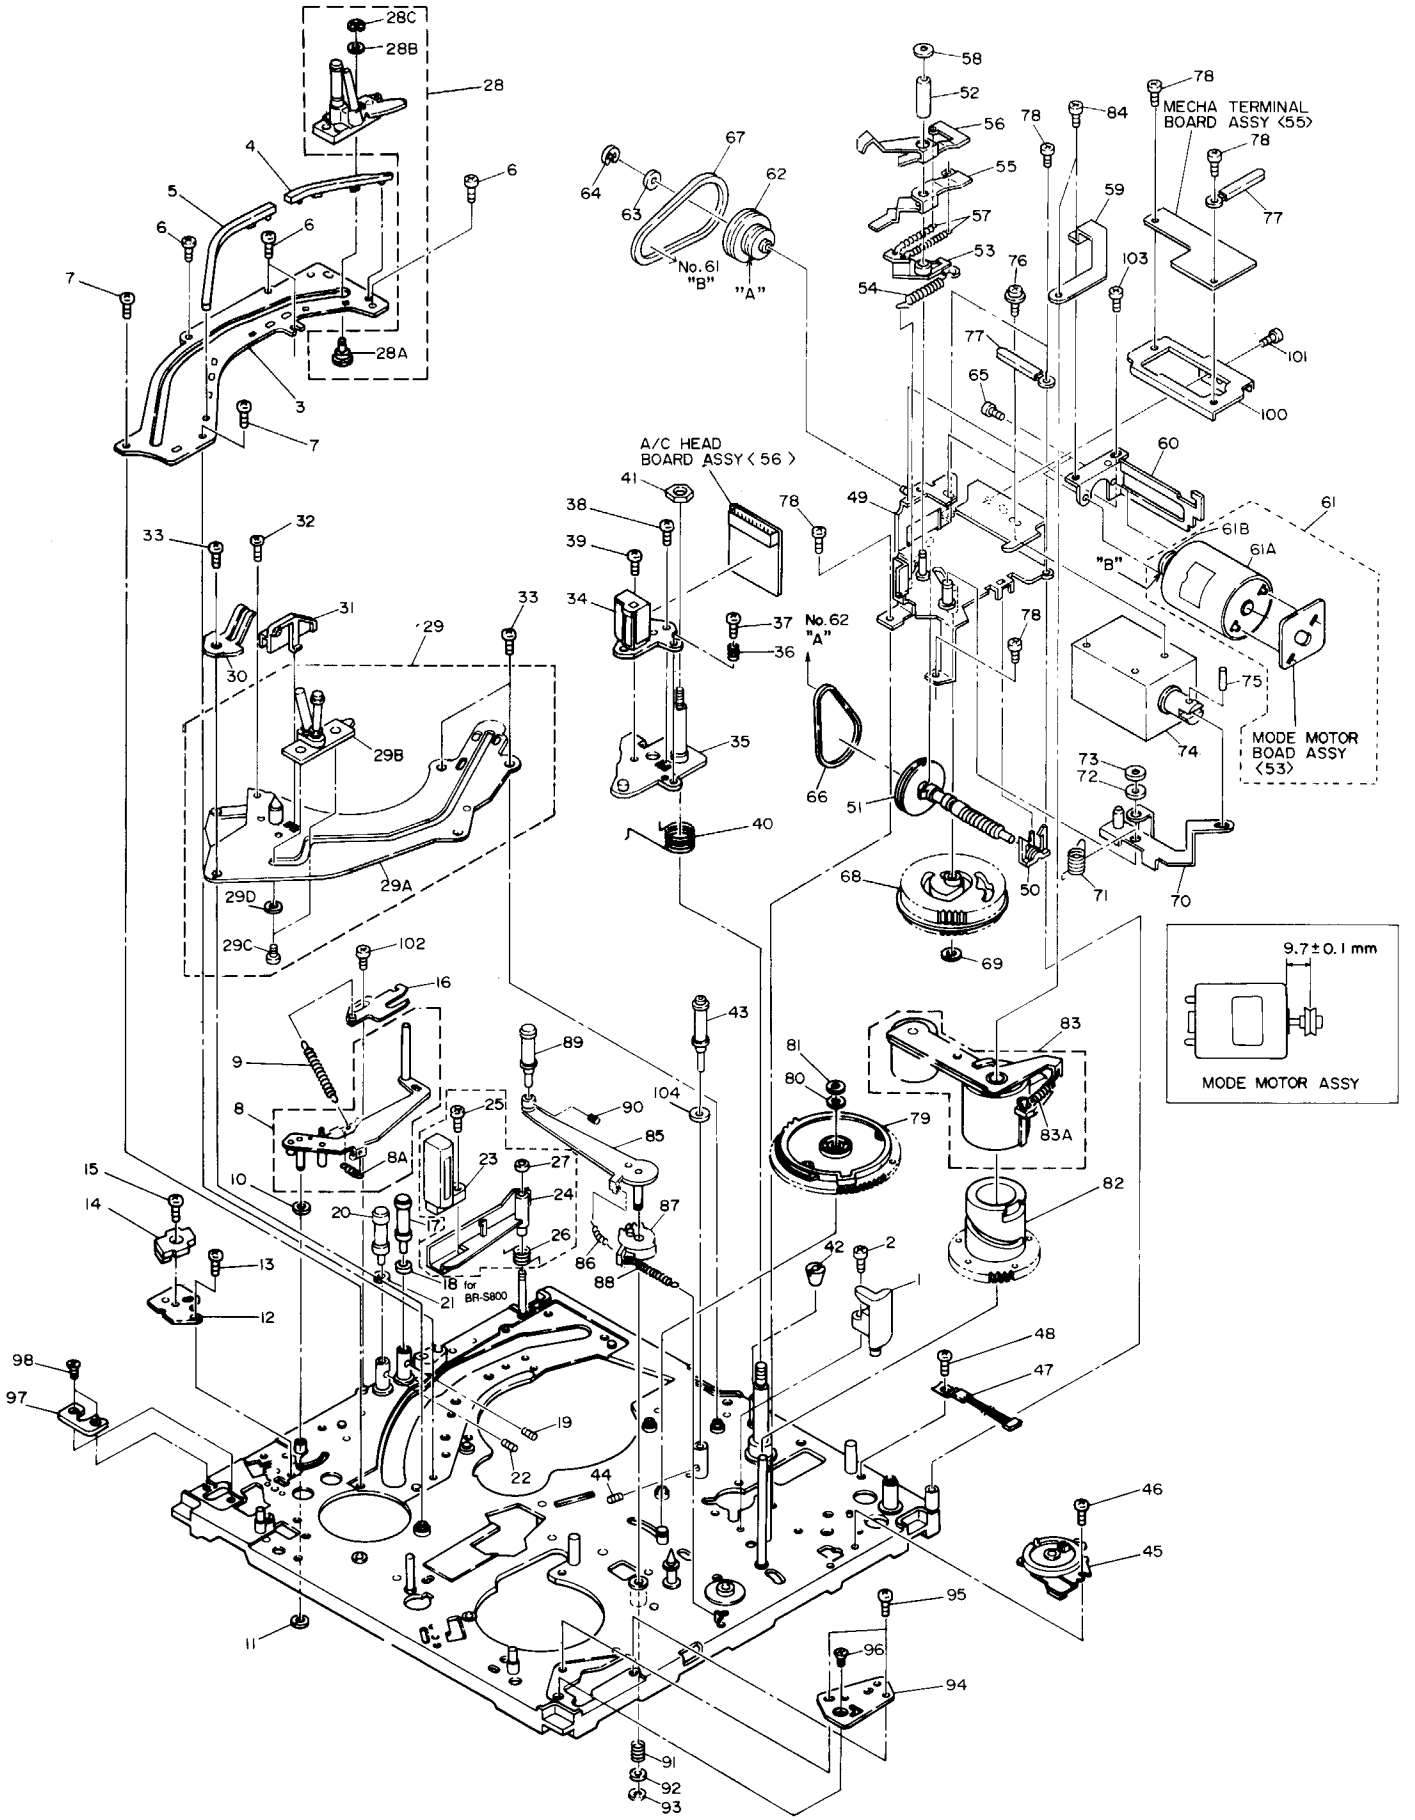

MECHANISM-1 ASSEMBLY LIST M5

M5MM□□□□

Symbol No.	Part No.	Part Name	Description
1	PRD44121-01-01	ARM GUIDE	
2	SDST2606Z	SCREW	M2.6×6
3	PRD30806-01-02	SUB DECK(S)	
4	PQ33995	GUIDE RAIL 2(S)	
5	PRD30808	GUIDE RAIL 1(S)	
6	SDSP2605Z	SCREW	M2.6×5, ×4
7	SDSP2603.5M	SCREW	M2.6×3, ×2
8	PRD43638A-01	TENSION ARM	
8A	PQM30001-345	TENSION SPRING	
9	PRD43935	TENSION SPRING	
10	Q03093-838	PLASTIC WASHER	
11	PQM30017	SLIT WASHER	
12	PRD43466-01-02	BASE	
13	SDSP2003Z	SCREW	M2×3
14	PU61338	TENSION SENSOR	
15	SDSP2604Z	SCREW	M2.6×4
16	PRD43902A	SP.ADJ ASS'Y	
17	PRD43721A	GUIDE ROLLER	
18	PQ45294	CAP	
19	YFS2603B	SCREW	
20	PRD43721A	GUIDE ROLLER	
21	PQ45294	CAP	
22	PQ45295	SCREW	
23	PGZ01841	FULL ERASE HEAD	BR-S800
24	PRD30817	FE HEAD ARM	BR-S800
25	SDSF2608M	SCREW	M2.6×8, S800
26	PRD44149	TORTION SPRING	BR-S800
27	PQM30017-6	SLIT WASHER	BR-S800
28	PRD30809A	POLE BASE ASSY	
28A	PRD43671-01-02	STOPPER	
28B	Q03093-829	PLASTIC WASHER	
28C	REE1500	E.WASHER	
29	PRD44032A-02	LOADING(T)ASS'Y	
29A	PRD43627A-01	GUIDE RAIL	
29B	PRD30811A-04	POLE BASE	
29C	PRD43819-02	SCREW	×2
29D	PRD43925	O RING	
30	PRD44276	EARTH PLATE	
31	PRD44268	TAPE GUIDE	
32	SDSP2603.5M	SCREW	M2.6×3
33	SDSP2605Z	SCREW	M2.6×5, ×3
34	PGZ01840	AUDIO HEAD	
35	PRD44127A	HEAD ARM ASS'Y	
36	PQM30002-197	C.SPRING	
37	SDSP2612Z	SCREW	M2.6×12
38	PQ44621	SCREW	
39	PQ43687B	SCREW	
40	PQ44119	TORSION SPRING	
41	PQ40353	NYLON NUT	
42	PRD44241	TAPER NUT	
43	PRD44151A-01	GUIDE ROLLER	
44	PQ45295	SCREW	
45	PU61339-1-1	ROTARY ENCORDER	
46	SDSP2004Z	SCREW	M2×4
47	PU61357	DEW SENSOR	
48	SDSP2004Z	SCREW	M2.6×4
49	PRD44105A	S.BKT ASS'Y	
50	PQ44129	WORM BEARING 2	
51	PRD44122A	WORM GEAR	
52	PRD44108	COLLAR	

Symbol No.	Part No.	Part Name	Description
53	PQ33992-1-1	LOCK LEVER 1	
54	PQM30001-313	TENSION SPRING	
55	PRD44107	LOCK LEVER 2	
56	PRD30971-01-01	LOCK LEVER 3	
57	PQM30001-314	TENSION SPRING	×2
58	PQM30017-6	SLIT WASHER	
59	PRD44103	ARM	
60	PRD30969	MOTOR BRACKET	
61	PRD44123A	MOTOR ASS'Y	
61A	PU60628-3-2	LOADING MOTOR	
61B	PQ43546-1-2	MOTOR PULLEY	
62	PRD43968	PULLEY ASS'Y	
63	Q03093-829	PLASTIC WASHER	
64	REE1200	E RING	
65	SPSP3003Z	SCREW	M3×3, ×2
66	PRD30022-17	BELT	
67	PRD30022-18	BELT	
68	PQ21313-1-1	CAM GEAR	
69	PQM30017-12	SLIT WASHER	
70	PRD44106A	S.LEVER ASS'Y	
71	PRD44113	TOR.SPRING	
72	Q03093-818	WASHER	
73	PQM30017-12	SLIT WASHER	
⚠ 74	PGZ01845	SOLENOID ASS'Y	
75	PSE3010	SPRING PIN	
76	DPSP3005Z	SCREW	M3×5, ×2
77	PU49485-4	WIRE CLAMP	×2
78	SDST2605Z	SCREW	M2.6×5, ×6
79	PQ21315-1-2	CONTROL CAM	
80	Q03093-849	WASHER	
81	PQM30017-28	SLIT WASHER	
82	PQ21312	P.ROLLER CAM	
83	PRD43387A-01	PINCH ROLLER	
83	PRD43387B-01	P.R.ARM ASS'Y	OR
83A	PRD30024-60	TENSION SPRING	
84	SDST2606Z	SCREW	M2.6×6, ×2
85	PRD43658A	GUIDE ARM	
86	PRD30023-54	COMPRESS SPRING	
87	PRD44039	GEAR	
88	PRD30024-67	TENSION SPRING	
89	PRD43660A-02	GUIDE ROLLER	
90	YFS2003B	SCREW	
91	PRD30023-55	COMPRESSION SPRING	
92	WSS4000Z	WASHER	
93	PQM30017-13	SLIT WASHER	
94	PRD43889	SOCKET	
95	SDSP2605Z	SCREW	M2.6×5, ×2
96	SSSP2606Z	SCREW	M2.6×6
97	PRD43890	SOCKET	
98	SDSP2605Z	SCREW	M2.6×5, ×2
100	PRD31029	D.TERM PWB STAY	
101	SDST2605Z	SCREW	M2.6×5
102	SDSP2605Z	SCREW	M2.6×5
103	SDSP2604Z	SCREW	M2.6×4
104	PQ45294	CAP	

5.6 MECHANISM-2 ASSEMBLY M6

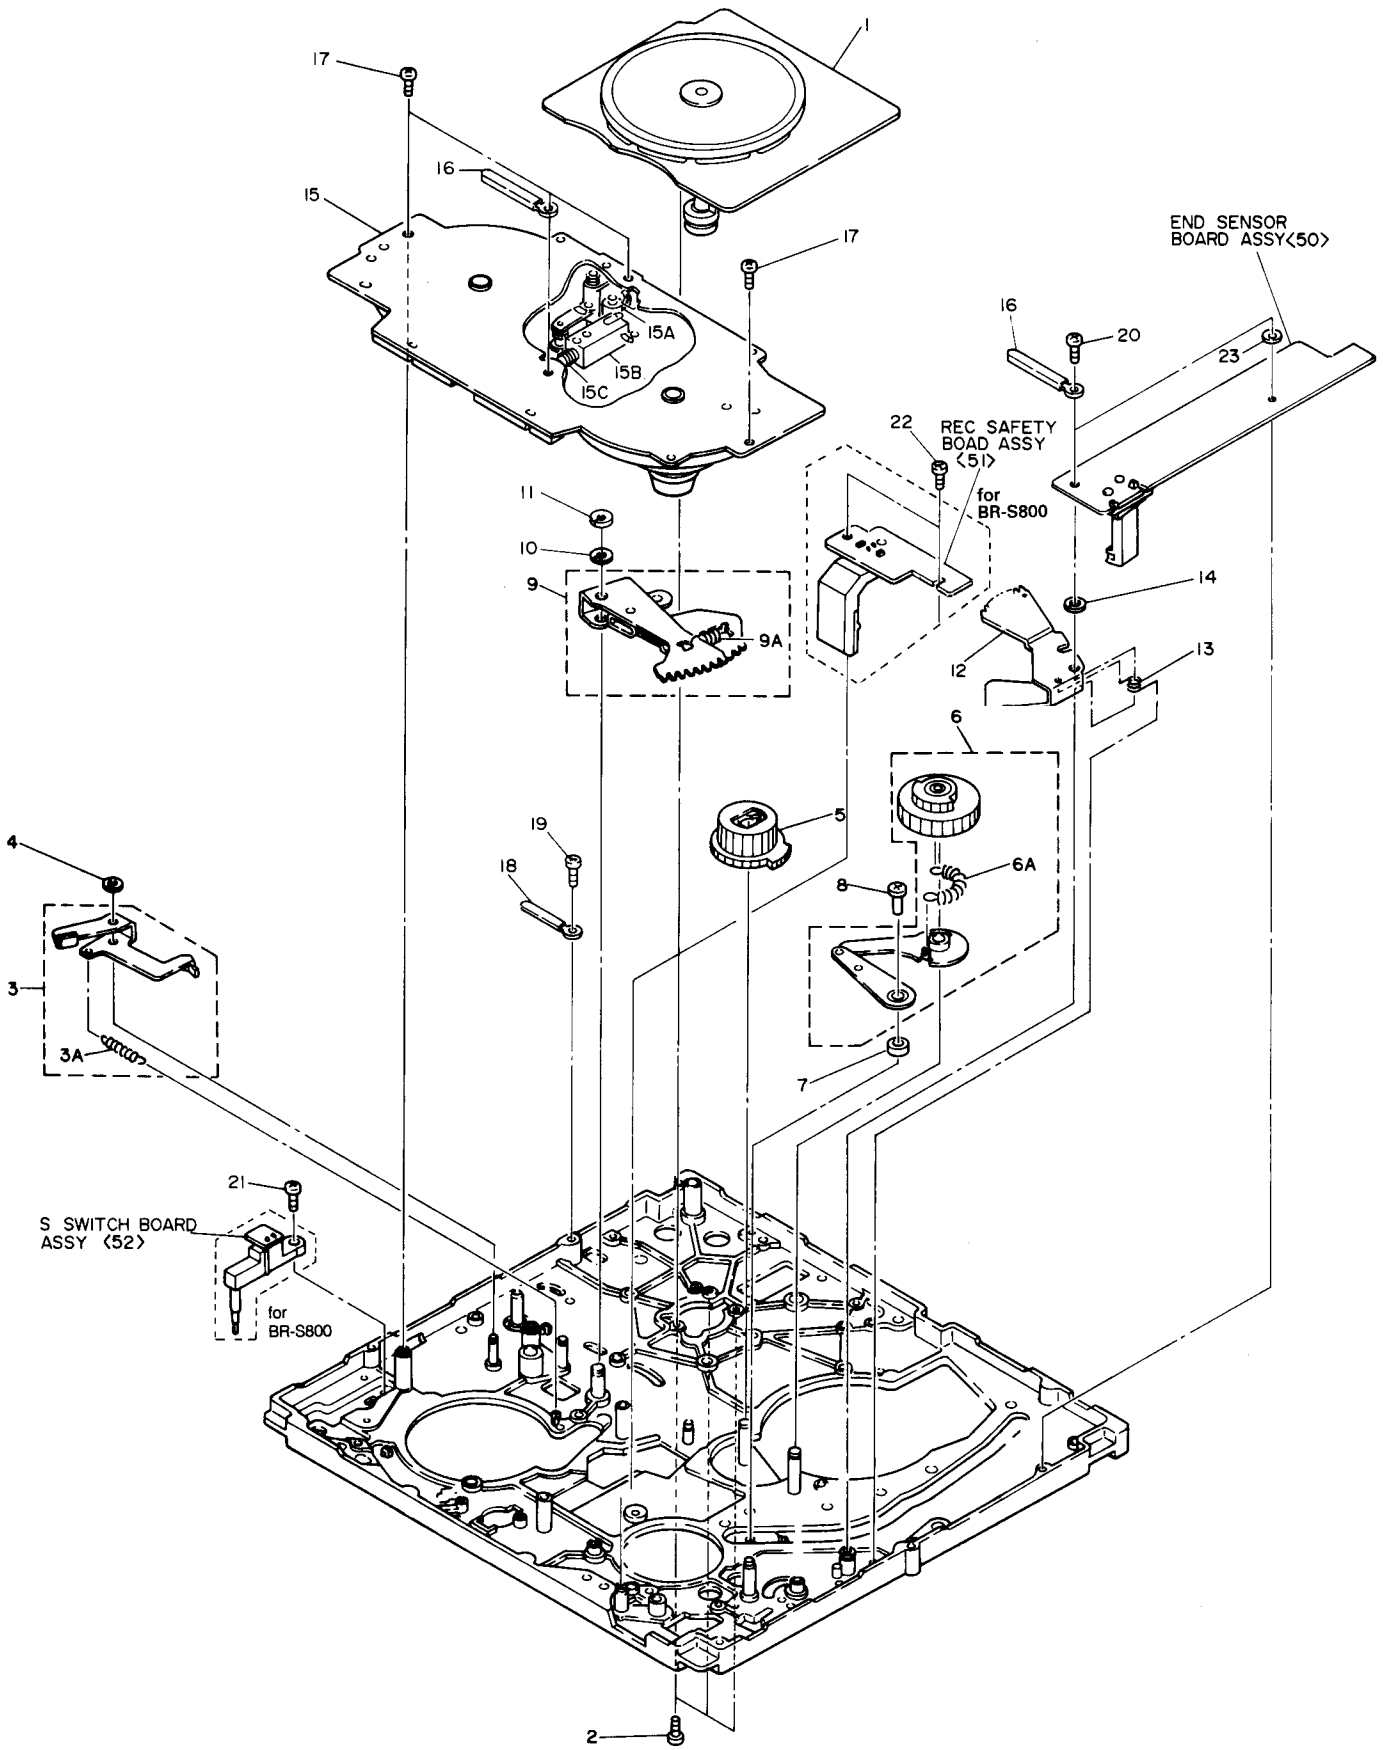

MECHANISM-2 ASSEMBLY LIST [M][6]

[M][6][M][M]□□□□

Symbol No.	Part No.	Part Name	Description
1	PGZ01535-01-01	CAPSTAN MOTOR	
2	SDSP2608Z	SCREW	M2.6×8, ×3
3	PRD43479A-01	BRAKE	
3A	PRD30024-58	TENSION SPRING	
4	PQM30017-6	SLIT WASHER	
5	PQ34033	LOADING GEAR(T)	
6	PRD43923A	LOADING GEAR	
6A	PQM30001-318	TENSION SPRING	
7	PRD44019	COLLAR	
8	PRD44287	SCREW	
9	PQ45306B-3	GEAR	
9A	PQM30001-320	TENSION SPRING	
10	Q03093-833	PLASTIC WASHER	
11	REE3000	E WASHER	
12	PQ34007	CANCEL LEVER	
13	PQ45313	TORSION SPRING	
14	PQM30017-12	SLIT WASHER	
15	PGZ01958A	REEL MOTOR	
15A	PGZ01958-001	LED HOLDER ASS'Y	
15B	PGZ01958-002	SOLENOID	
15C	PGZ01958-003	COMPRESSION SPRING	
16	PU49485-4	WIRE CLAMP	×3
17	SDST2605Z	SCREW	M2.6×5, ×4
18	PU49485-4	WIRE CLAMP	
19	SDST2605Z	SCREW	M2.6×5
20	DPSP2606Z	SCREW	M2.6×6, ×2
21	SDST2605Z	SCREW	M2.6×5
22	SDST2605Z	SCREW	M2.6×5
23	Q03093-826	PLASTIC WASHER	

5.7 CASSETTE HOUSING ASSEMBLY M 7

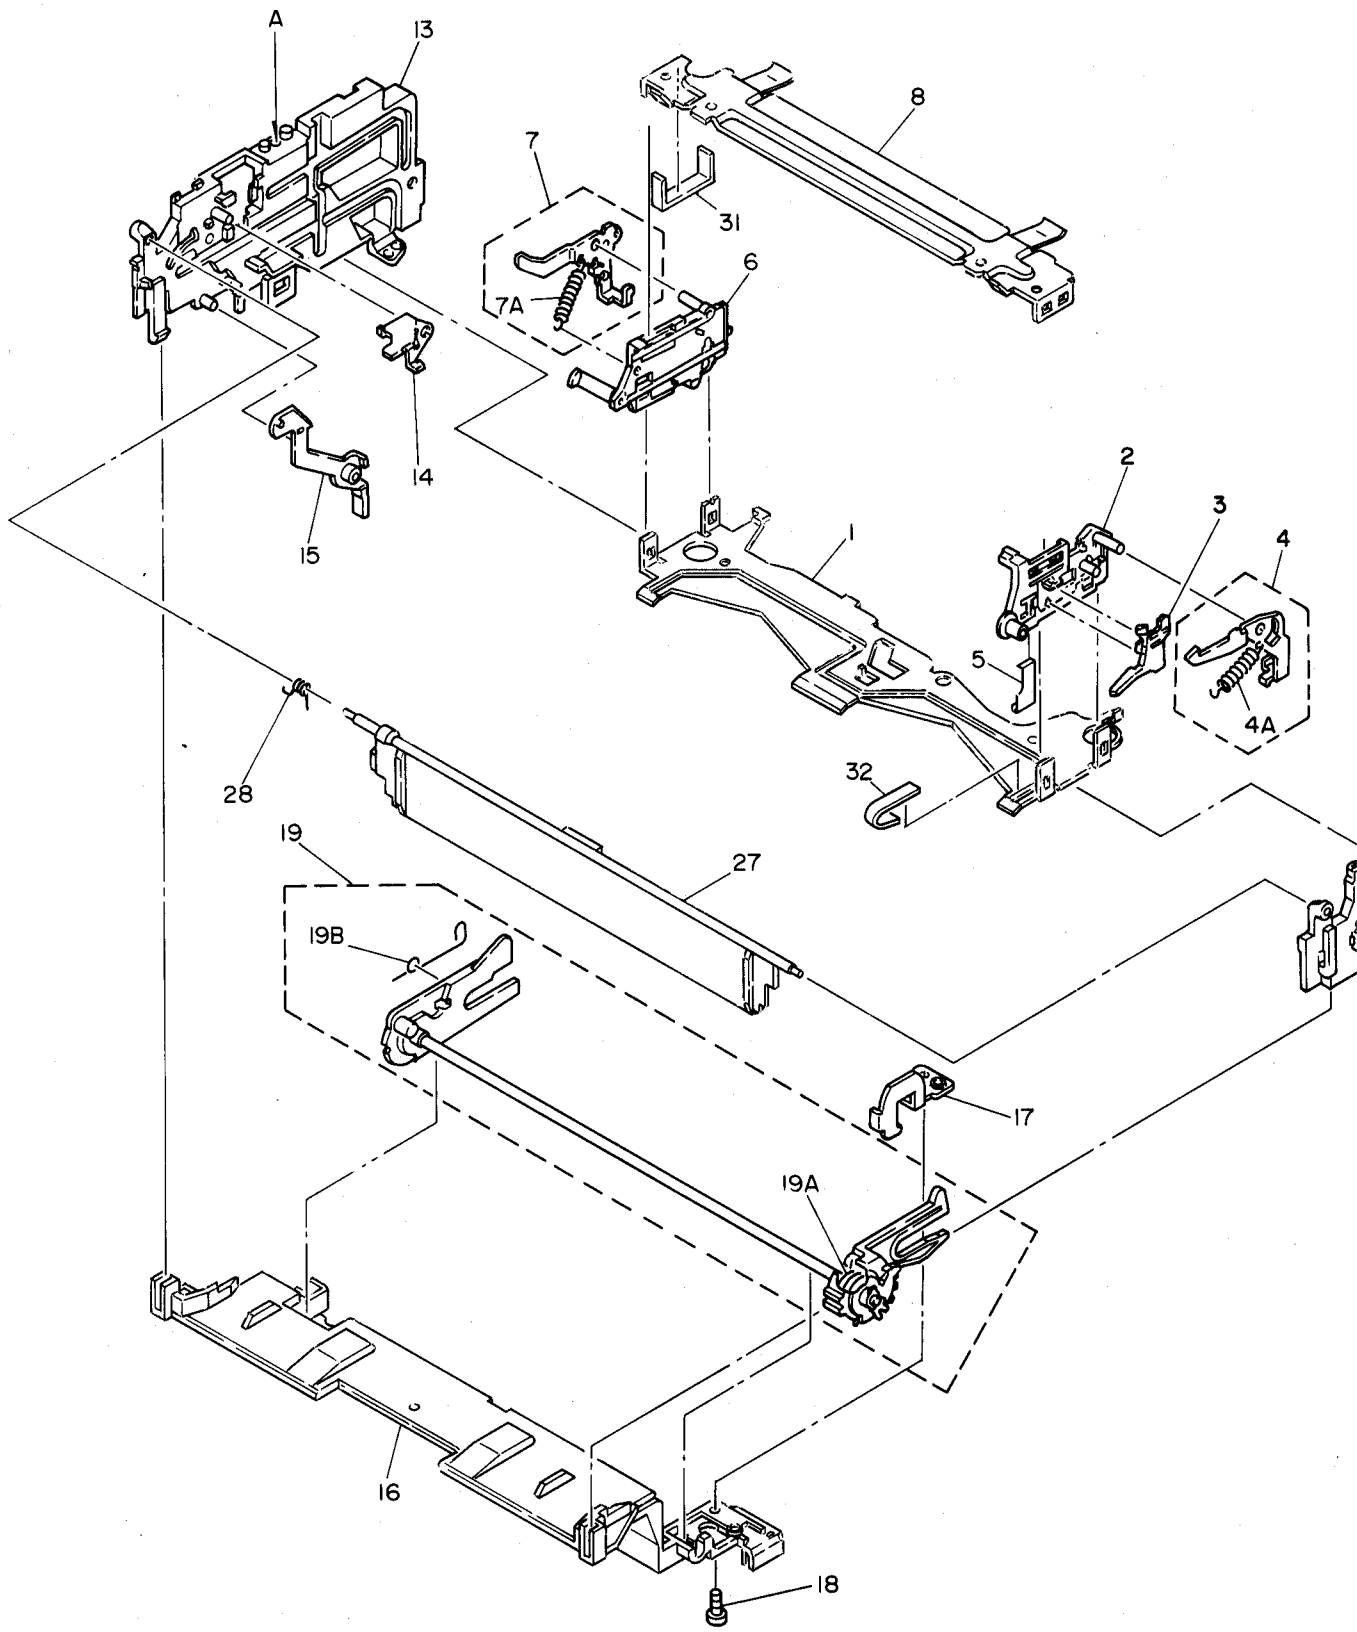

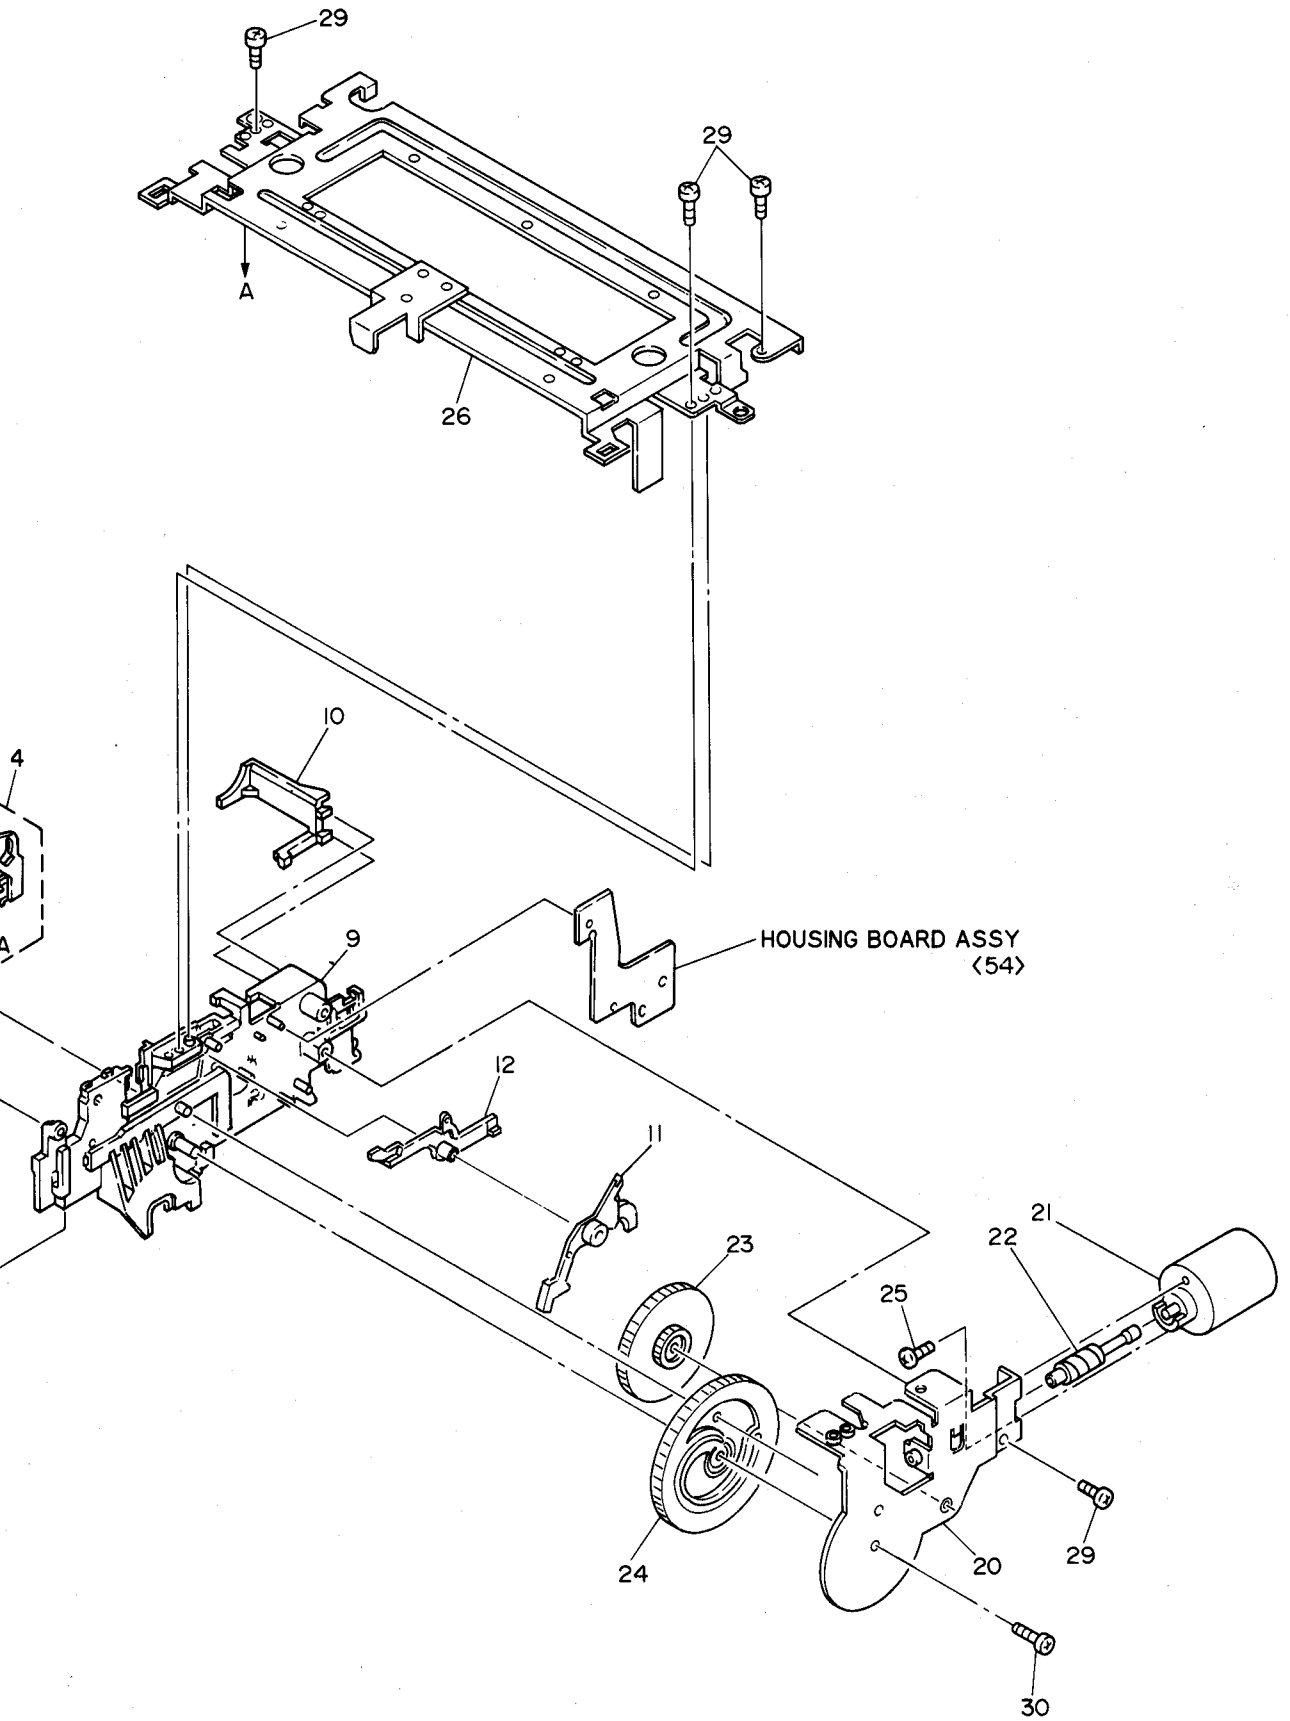
29
29
A
26
10
4
9
HOUSING BOARD ASSY
<54>
12
11
23
22
21
25
24
20
29
30

5.8 DRUM ASSEMBLY M 8

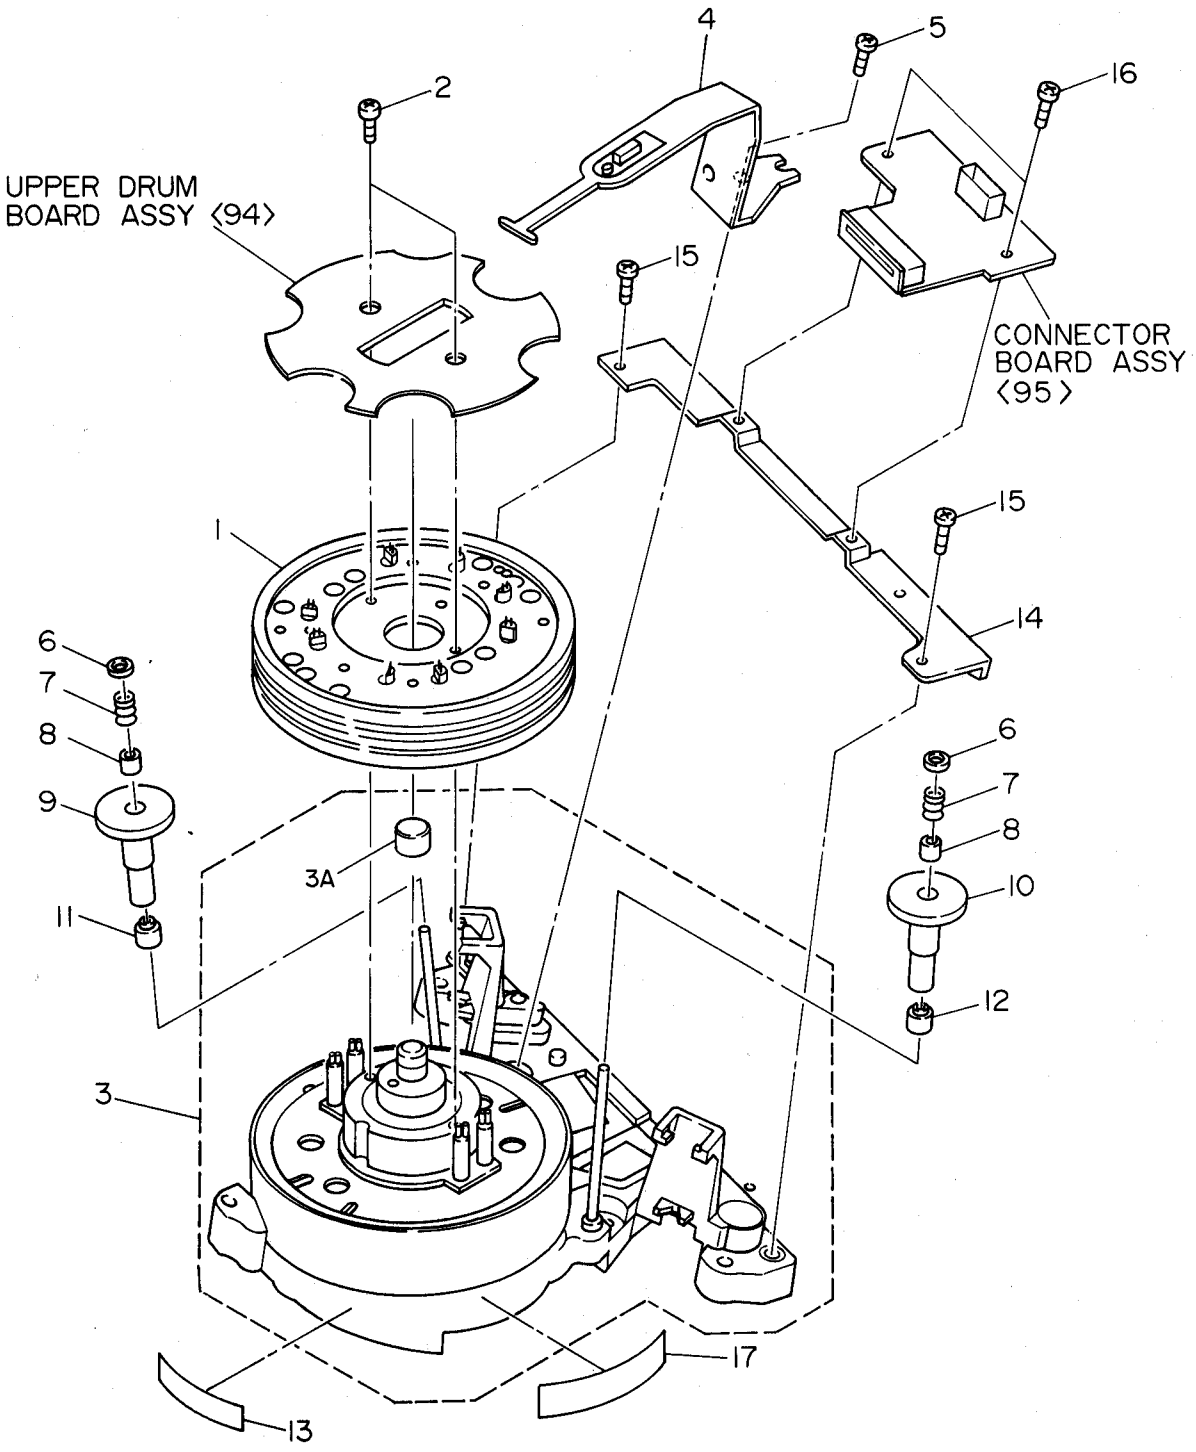

DRUM ASSEMBLY LIST M8

M8MM□□□□

Symbol No.	Part No.	Part Name	Description
0	LDR2001A	DRUM FINAL ASS'Y	BR-S800
0	LDR2002A	DRUM FINAL ASS'Y	BR-S500
1	PRD20458A	UPPER DRUM ASS'Y	BR-S800
1	PRD20485A	UPPER DRUM ASS'Y	BR-S500
2	PDM4165A	SCREW	M3×8, ×2
3	PRD20460A-01	L.D.MOTOR ASS'Y	
3A	PQ41596D	COMMUTATOR	
4	PRD44288A	BRUSH ASS'Y	
5	SDSG2606Z	SCREW	M2.6×6
6	PQM30017-25	SLIT WASHER	×2
7	PRD30023-42	COMPRESSION SPRING	×2
8	PRD30026-49	COLLAR	×2
9	PGZ01920	INERTIA ROLLER A(S)	
10	PGZ01920-02	INERTIA ROLLER A(T)	
11	PRD30026-50	COLLAR	
12	PRD30026-51	COLLAR	
13	PDM4067	PART NO. LABEL	
14	PRD31025	PWB BRACKET	
15	SDSG2606Z	SCREW	M2.6×6, ×2
16	SDSG2606Z	SCREW	M2.6×6, ×2
17	PRD43750	SHIELD TAPE	

CASSETTE HOUSING ASSEMBLY LIST [M][7]

[M][7][M][M]□□□□

Symbol No.	Part No.	Part Name	Description
0	PGS21023A-01	CASSET HOUSING	INCL. 1-32
1	PRD20464	HOLDER	*1
2	PQ11278-01-01	HOLDER	
3	PQ45459	LID OPENER	
4	PQ43596A-5	L.LEVER(R)	
4A	PQ43597-1-5	TENSION SPRING	
5	PRD44285	EARTH PLATE	Glued to HOLDER with screw sealant (Three-Bond 1401B).
6	PQ11279	HOLDER	
7	PQ45539A-01	LOCK LEVER	
7A	PQ43597-2	TENSION SPRING	
8	PRD30982A	STAY	*1
9	PQ11281-01-06	STAY	
10	PQ34097	GUIDE	
11	PQ34098	LEVER	
12	PRD30946	LEVER	
13	PQ11282-01-07	STAY	
14	PQ45479-01-02	DOOR STOPPER	
15	PQ34100	DOOR OPENER	
16	PRD10301-01-02	BRACKET	
17	PRD43729	BRACKET	
18	SSSP2606ZY	SCREW	M2.6×6
19	PQ34103A-04	ARM	
19A	PRD43806	TORSION SPRING	
19B	PQ43605	TOR.SPRING	
20	PRD30983A	MOTOR BRACKET	
⚠ 21	PQ45489A	MOTOR ASS'Y	
22	PQ45474	WORM GEAR	
23	PQ34109-01-01	CONNECT GEAR	
24	PQ34110-01-01	CAM	
25	SPSP3003Z	SCREW	M3×3, ×2
26	PRD30981A	TOP FRAME ASS'Y	
27	PRD30962	CASSETTE DOOR	
28	PRD44088	TORSION SPRING	
29	SDSF2608Z	SCREW	M2.6×8, ×4
30	SDSF2612Z	SCREW	M2.6×12
31	PRD44319	SHEET	
32	PRD30030-139	PAD	

*1: When this part is removed, the holders of No. 2 and No. 6 may possibly damaged during the removing work. When the holder of No. 1 or the stay of No. 8 is replaced, make sure to replace the holders of No. 2 and No. 6 with new ones at the same time by way of precaution.

[VIDEO 1]

Symbol No.	Part No.	Part Name	Description
Q49	DTC144EK	TRANSISTOR	ROHM
Q50	2SA1037K(QR)	TRANSISTOR	ROHM
Q51	2SD601A(QR)	TRANSISTOR	MATSUSHITA
Q52	2SC2412K(RS)	TRANSISTOR	ROHM
Q53	2SA1037K(QR)	TRANSISTOR	ROHM
Q63	2SC2412K(RS)	TRANSISTOR	ROHM
Q64	DTA144EK	TRANSISTOR	ROHM
Q65	DTC144EK	TRANSISTOR	ROHM
Q66	DTC144EK	TRANSISTOR	ROHM
Q67	2SC2412K(RS)	TRANSISTOR	ROHM
Q68	2SC2412K(RS)	TRANSISTOR	ROHM
Q69	2SC2412K(RS)	TRANSISTOR	ROHM
Q70	2SC2412K(RS)	TRANSISTOR	ROHM
Q71	2SC2412K(RS)	TRANSISTOR	ROHM
Q72	2SC2412K(RS)	TRANSISTOR	ROHM
Q73	2SC2412K(RS)	TRANSISTOR	ROHM
Q74	2SA1037K(QR)	TRANSISTOR	ROHM
Q75	DTC144EK	TRANSISTOR	ROHM
Q76	DTC144EK	TRANSISTOR	ROHM
Q77	DTC144EK	TRANSISTOR	ROHM
Q78	2SC2412K(RS)	TRANSISTOR	ROHM
Q79	2SA1037K(QR)	TRANSISTOR	ROHM
Q80	2SC2412K(RS)	TRANSISTOR	ROHM
Q81	2SA1037K(QR)	TRANSISTOR	ROHM
Q82	2SK621	F.E.T.	MATSUSHITA
Q83	2SC2412K(RS)	TRANSISTOR	ROHM
Q84	2SC2412K(RS)	TRANSISTOR	ROHM
Q85	2SC2412K(RS)	TRANSISTOR	ROHM
Q86	2SC2412K(RS)	TRANSISTOR	ROHM
Q87	2SC2412K(RS)	TRANSISTOR	ROHM
Q88	2SC2412K(RS)	TRANSISTOR	ROHM
Q89	2SC2412K(RS)	TRANSISTOR	ROHM
Q90	2SC2412K(RS)	TRANSISTOR	ROHM
Q91	DTC144EK	TRANSISTOR	ROHM
D1	DAN202K	DIODE ARRAY	ROHM BR-S800
D4	DAN202K	DIODE ARRAY	ROHM
D5	DAN202K	DIODE ARRAY	ROHM
D6	DAN202K	DIODE ARRAY	ROHM
D7	1SS99	DIODE	NEC
D8	1SS99	DIODE	NEC
D9	DAN202K	DIODE ARRAY	ROHM
D11	DAN202K	DIODE ARRAY	ROHM
D12	DAN202K	DIODE ARRAY	ROHM
D14	DAN202K	DIODE ARRAY	ROHM BR-S800
R1	QRSA08J-333	M.G.RESISTOR	33K 1/10W BR-S800
R2	QRSA08J-273	M.G.RESISTOR	27K 1/10W BR-S800
R3	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W BR-S800
R4	QRSA08J-333	M.G.RESISTOR	33K 1/10W BR-S800
R5	QRSA08J-273	M.G.RESISTOR	27K 1/10W BR-S800
R6	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W BR-S800
R7	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W BR-S800
R8	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W BR-S800
R10	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R11	QVPC625-303	TRIM.RESISTOR	30K AGC GAIN BR-S800
R12	QRSA08J-223	M.G.RESISTOR	22K 1/10W BR-S800
R13	QRSA08J-273	M.G.RESISTOR	27K 1/10W BR-S800
R14	QRSA08J-821	M.G.RESISTOR	820 1/10W BR-S800

Symbol No.	Part No.	Part Name	Description
R15	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R16	QRSA08J-391	M.G.RESISTOR	390 1/10W BR S800
R17	QRSA08J-391	M.G.RESISTOR	390 1/10W BR S800
R18	QRSA08J-333	M.G.RESISTOR	33K 1/10W BR-S800
R19	QRSA08J-103	M.G.RESISTOR	10K 1/10W BR-S800
R20	QRSA08J 222	M.G.RESISTOR	2.2K 1/10W BR S800
R21	QRSA08J-561	M.G.RESISTOR	560 1/10W BR S800
R22	QRSA08J-101	M.G.RESISTOR	100 1/10W BR-S800
R23	QRSA08J-821	M.G.RESISTOR	820 1/10W BR S800
R24	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W BR S800
R25	QRSA08J-103	M.G.RESISTOR	10K 1/10W BR-S800
R26	QRSA08J-182	M.G.RESISTOR	1.8K 1/10W BR-S800
R27	QRSA08J 222	M.G.RESISTOR	2.2K 1/10W BR S800
R28	QRSA08J-153	M.G.RESISTOR	15K 1/10W BR S800
R29	QRSA08J-750	M.G.RESISTOR	75 1/10W BR S800
R30	QRSA08J 201	M.G.RESISTOR	200 1/10W BR S800
R31	QRSA08J 332	M.G.RESISTOR	3.3K 1/10W BR S800
R32	QRSA08J-201	M.G.RESISTOR	200 1/10W BR S800
R33	QVPC625 102	TRIM.RESISTOR	1K COMB Y LEVEL BR S800
R34	QVPC625 102	TRIM.RESISTOR	1K COMB C LEVEL BR S800
R35	QRSA08J 332	M.G.RESISTOR	3.3K 1/10W BR S800
R36	QRSA08J-393	M.G.RESISTOR	39K 1/10W BR S800
R37	QRSA08J-223	M.G.RESISTOR	22K 1/10W BR S800
R38	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W BR S800
R39	QRSA08J 201	M.G.RESISTOR	200 1/10W BR S800
R40	QRSA08J 201	M.G.RESISTOR	200 1/10W BR S800
R41	QRSA08J-393	M.G.RESISTOR	39K 1/10W BR S800
R42	QRSA08J 103	M.G.RESISTOR	10K 1/10W BR S800
R43	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W BR S800
R44	QRSA08J-471	M.G.RESISTOR	470 1/10W BR S800
R45	QRSA08J 101	M.G.RESISTOR	100 1/10W BR S800
R46	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W BR S800
R47	QRSA08J 152	M.G.RESISTOR	1.5K 1/10W BR S800
R48	QRSA08J 181	M.G.RESISTOR	180 1/10W BR S800
R49	QRSA08J 562	M.G.RESISTOR	5.6K 1/10W BR S800
R50	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W BR S800
R51	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W BR-S800
R52	QRSA08J 393	M.G.RESISTOR	39K 1/10W BR S800
R53	QRSA08J-223	M.G.RESISTOR	22K 1/10W BR S800
R54	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR S800
R55	QRSA08J 201	M.G.RESISTOR	200 1/10W BR S800
R56	QRSA08J 201	M.G.RESISTOR	200 1/10W BR S800
R57	QRSA08J-393	M.G.RESISTOR	39K 1/10W BR S800
R58	QRSA08J-123	M.G.RESISTOR	12K 1/10W BR-S800
R59	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W BR S800
R60	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W BR S800
R61	QRSA08J-101	M.G.RESISTOR	100 1/10W BR-S800
R62	QRSA08J 222	M.G.RESISTOR	2.2K 1/10W BR S800
R63	QRSA08J 152	M.G.RESISTOR	1.5K 1/10W BR S800
R64	QRSA08J-333	M.G.RESISTOR	33K 1/10W
R65	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R66	QRSA08J 471	M.G.RESISTOR	470 1/10W
R67	QRSA08J 123	M.G.RESISTOR	12K 1/10W
R68	QRSA08J-105	M.G.RESISTOR	1.0M 1/10W
R69	QRSA08J-105	M.G.RESISTOR	1.0M 1/10W
R70	QRSA08J-683	M.G.RESISTOR	68K 1/10W
R71	QRSA08J 181	M.G.RESISTOR	180 1/10W
R72	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R73	QRSA08J 181	M.G.RESISTOR	180 1/10W

SECTION 6
ELECTRICAL PARTS LIST

SAFETY PRECAUTION:
Parts identified by the ⚠ symbol are critical for safety. Replace only with specified parts numbers.
For maximum reliability and performance, all other replacement parts should be identical to those specified.

NOTE:
- The list whose title is followed by the model number applies only to the specified model.
- The model number appearing in the "Description" column expresses that the part is for exclusive use of the specified model.
- Parts not denoted by parts numbers are not supplied by JVC.
- Abbreviations in this list are as follows:

RESISTORS

In the "Description" column:

All resistance values are in ohms (Ω).
K expresses kilo-ohm (1 000 ohms, kΩ).
M expresses mega-ohm (10^6 ohms, MΩ).

In the "Parts Name" column:

COMP. RESISTOR	:	Composition Resistor
U.F. RESISTOR	:	Non-inflammable Resistor
O.M.F. RESISTOR	:	Oxide Metalized Film Resistor
FUSI. RESISTOR	:	Fusible Resistor
M.P. RESISTOR	:	Metal Plate Resistor
M.G. RESISTOR	:	Metal Graze Resistor
M.F. RESISTOR	:	Metal Film Resistor
W.W. RESISTOR	:	Wire Wound Resistor

CAPACITORS

In the "Description" column:

All capacitance values are in microfarad (μF) unless otherwise indicated.
P expresses picofarad (10^{-12} farad, pF).

In the "Parts Name" column:

TRIM. CAPACITOR	:	Trimmer Capacitor
CER. CAPACITOR	:	Ceramic Capacitor
E. CAPACITOR	:	Electrolytic Capacitor
TAN. CAPACITOR	:	Tantalum Capacitor
MPP CAPACITOR	:	Metalized Polypropylene Capacitor
O.F. CAPACITOR	:	Oil Film Capacitor
MPF CAPACITOR	:	Metalized Polyfilm Capacitor
F.M. CAPACITOR	:	Film Mica Capacitor
P.P. CAPACITOR	:	Polypropylene Capacitor
P.S. CAPACITOR	:	Polystyrene Capacitor

6.1 MOTHER 1 BOARD ASSEMBLY LIST [0][1]

PRK10152A [0][1]

Symbol No.	Part No.	Part Name	Description
CN1	PGZ01940-64	CONNECTOR	64PIN
CN2	PGZ01940-64	CONNECTOR	64PIN
CN3	PGZ01941-10	CONNECTOR	10PIN
CN4	PGZ01941-10	CONNECTOR	10PIN
CN5	PGZ01941-10	CONNECTOR	10PIN
CN6	PGZ01941-10	CONNECTOR	10PIN
CN7	PU60711-118	CONNECTOR	18PIN
CN8	PU60711-118	CONNECTOR	18PIN
CN9	PU59973-30	CONNECTOR	30PIN
CN10	PU59973-30	CONNECTOR	30PIN
CN11	PU59555-111	CONNECTOR	11PIN
CN12	PU59555-110	CONNECTOR	10PIN
CN13	PU59555-109	CONNECTOR	9PIN
CN14	PU59555-106	CONNECTOR	6PIN
CN15	PU59555-105	CONNECTOR	5PIN
CN16	PU59555-107	CONNECTOR	7PIN
⚠ K3	PGZ00354	FERRATE BEADS	
⚠ K4	PGZ00354	FERRATE BEADS	
⚠ K5	PGZ00354	FERRATE BEADS	
⚠ K6	PGZ00354	FERRATE BEADS	
⚠ K7	PGZ00354	FERRATE BEADS	
⚠ K9	PGZ00354	FERRATE BEADS	
⚠ K10	PGZ00354	FERRATE BEADS	
⚠ K11	PGZ00354	FERRATE BEADS	
SP1	PGZ01377	STYLE PIN	
SP2	PGZ01377	STYLE PIN	
SP3	PGZ01377	STYLE PIN	
SP4	PGZ01377	STYLE PIN	
BK1	PRD31002	BRACKET	
S1	GBST3006M	SCREW	M3 x 6
S2	SDST2606Z	SCREW	M2.6 x 6
CL1	PU59311-3	WIRE CLAMP	
CL2	PU59311-3	WIRE CLAMP	
SU1	PGZ01031-03	PWB SUPPORT	

6.2 MOTHER 2 BOARD ASSEMBLY LIST [0][2]

PRK10153A [0][2]

Symbol No.	Part No.	Part Name	Description
CN1	PGZ01940-44	CONNECTOR	44PIN
CN2	PGZ01940-44	CONNECTOR	44PIN
CN3	PGZ01940-44	CONNECTOR	44PIN
CN4	PGZ01940-44	CONNECTOR	44PIN
CN5	PGZ01940-44	CONNECTOR	44PIN
CN6	PGZ01940-44	CONNECTOR	44PIN
CN7	PGZ01940-44	CONNECTOR	44PIN
CN8	PGZ01941-10	CONNECTOR	10PIN
CN9	PGZ01941-10	CONNECTOR	10PIN
CN10	PGZ01941-10	CONNECTOR	10PIN
CN11	PGZ01941-10	CONNECTOR	10PIN
CN12	PU60711-130	CONNECTOR	30PIN
CN13	PU59973-30	CONNECTOR	30PIN
CN14	PU59555-111	CONNECTOR	11PIN
CN15	PU59555-109	CONNECTOR	9PIN
CN16	PU59555-103	CONNECTOR	3PIN
SP1	PGZ01377	STYLE PIN	
SP2	PGZ01377	STYLE PIN	
BK1	PRD44292	BKT(44P DIN)	
S1	GBST3006M	SCREW	M3 x 6
S2	SDST2606Z	SCREW	M2.6 x 6
CL1	PU59311-3	WIRE CLAMP	
CL2	PU59311-3	WIRE CLAMP	
CL3	PU59311-3	WIRE CLAMP	
CL4	PU59311-3	WIRE CLAMP	
SU1	PGZ01031-03	PWB SUPPORT	
SU2	PGZ01031-03	PWB SUPPORT	
SU3	PGZ01031-03	PWB SUPPORT	

6.3 SLOT MOTHER BOARD ASSEMBLY LIST [0][3]

PRK20232A [0][3]□□□□□□

Symbol No.	Part No.	Part Name	Description
SW1-1	QSS1K31-L01	DIP SWITCH	OUTPUT SELECTOR
SW1-2	QSS1K31-L01	DIP SWITCH	OUTPUT SELECTOR
SW2-1	QSS1K31-L01	DIP SWITCH	OUTPUT SELECTOR
SW2-2	QSS1K31-L01	DIP SWITCH	OUTPUT SELECTOR
SW3	PU54440	SWITCH	TBS
CN1	PGZ01937-64	CONNECTOR	64PIN
CN2	PGZ01940-32	CONNECTOR	32PIN
CN3	PGZ01940-20	CONNECTOR	20PIN
CN4	PGZ01940-32	CONNECTOR	32PIN
CN5	PGZ01940-20	CONNECTOR	20PIN

6.4 VIDEO 1 BOARD ASSEMBLY LIST [1][0]

PRK20227A-06 (BR-S800)

PRK20227B-06 (BR-S500) [1][0]□□□□□□

Symbol No.	Part No.	Part Name	Description	
IC1	AN3916	I.C.(M)	MATSUSHITA	BR-S800
IC2	CXD2024AQ	I.C.(M)	SONY	BR S800
IC3	TA7347P	I.C.(M)	TOSHIBA	BR-S800
IC4	LVA523SA	I.C.(M)	MITSUMI	
IC5	TA7347P	I.C.(M)	TOSHIBA	BR-S800
IC6	TA7347P	I.C.(M)	TOSHIBA	
IC7	M52366FP	I.C.(M)	MITSUBISHI	
IC8	TA7347P	I.C.(M)	TOSHIBA	
IC9	TL8825F	I.C.(M)	TEXAS	
IC12	M52350GP	I.C.(M)	MITSUBISHI	
IC13	TC74HC4094AF	I.C.(M)	TOSHIBA	
IC14	M5278L05	I.C.(M)	MITSUBISHI	BR-S800
Q1	2SC2412K(RS)	TRANSISTOR	ROHM	BR S800
Q2	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q3	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q4	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q5	2SC2412K(RS)	TRANSISTOR	ROHM	BR S800
Q6	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q7	2SA1037K(QR)	TRANSISTOR	ROHM	BR-S800
Q8	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q9	2SK621	F.E.T.	MATSUSHITA	BR-S800
Q10	2SK621	F.E.T.	MATSUSHITA	BR-S800
Q11	2SC2412K(RS)	TRANSISTOR	ROHM	BR S800
Q12	2SC2412K(RS)	TRANSISTOR	ROHM	BR S800
Q13	2SA1037K(QR)	TRANSISTOR	ROHM	BR-S800
Q14	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q15	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q16	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q17	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q18	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q19	2SA1037K(QR)	TRANSISTOR	ROHM	BR-S800
Q20	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q21	2SC2412K(RS)	TRANSISTOR	ROHM	
Q22	2SC2412K(RS)	TRANSISTOR	ROHM	
Q23	2SC2412K(RS)	TRANSISTOR	ROHM	
Q24	2SC2412K(RS)	TRANSISTOR	ROHM	
Q25	2SC2412K(RS)	TRANSISTOR	ROHM	
Q26	2SC1740S(QRS)	TRANSISTOR	ROHM	
Q27	2SC1740S(QRS)	TRANSISTOR	ROHM	
Q28	DTC144EK	TRANSISTOR	ROHM	
Q29	2SC2412K(RS)	TRANSISTOR	ROHM	BR S800
Q30	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q31	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q32	2SC2412K(RS)	TRANSISTOR	ROHM	
Q33	2SA1037K(QR)	TRANSISTOR	ROHM	
Q34	2SC1740S(QRS)	TRANSISTOR	ROHM	
Q35	2SC2412K(RS)	TRANSISTOR	ROHM	
Q36	2SC2412K(RS)	TRANSISTOR	ROHM	
Q37	2SC2412K(RS)	TRANSISTOR	ROHM	
Q38	2SC2412K(RS)	TRANSISTOR	ROHM	
Q39	2SC2412K(RS)	TRANSISTOR	ROHM	
Q40	2SC1740S(QRS)	TRANSISTOR	ROHM	
Q41	2SC1740S(QRS)	TRANSISTOR	ROHM	
Q42	2SA1037K(QR)	TRANSISTOR	ROHM	BR-S800
Q43	2SC2412K(RS)	TRANSISTOR	ROHM	BR S800
Q44	2SC2412K(RS)	TRANSISTOR	ROHM	
Q47	DTA144EK	TRANSISTOR	ROHM	
Q48	2SC2412K(RS)	TRANSISTOR	ROHM	

Symbol No.	Part No.	Part Name	Description
R74	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R75	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R76	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R77	QRSA08J-391	M.G.RESISTOR	390 1/10W
R78	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R79	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R80	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R81	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R82	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R83	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R84	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R85	QRD161J-330	C.RESISTOR	33 1/6W
R86	QRD161J-820	C.RESISTOR	82 1/6W
R87	QRSA08J-123	M.G.RESISTOR	12K 1/10W
R88	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R89	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R90	QRSA08J-750	M.G.RESISTOR	75 1/10W
R91	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W BR-S800
R92	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R93	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W BR-S800
R94	QRSA08J-333	M.G.RESISTOR	33K 1/10W BR-S800
R95	QRSA08J-273	M.G.RESISTOR	27K 1/10W BR-S800
R96	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R97	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W BR-S800
R98	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W BR-S800
R99	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R100	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R101	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R102	QRSA08J-101	M.G.RESISTOR	100 1/10W
R103	NRVA62D-391	M.F.RESISTOR	390 1/16W
R104	NRVA62D-391	M.F.RESISTOR	390 1/16W
R105	NRVA62D-391	M.F.RESISTOR	390 1/16W
R106	NRVA02D-1051	M.F.RESISTOR	1.05K 1/10W
R107	QRD161J-561	C.RESISTOR	560 1/6W
R108	QRSA08J-750	M.G.RESISTOR	75 1/10W
R109	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R110	QRSA08J-561	M.G.RESISTOR	560 1/10W
R111	NRVA62D-471	M.F.RESISTOR	470 1/16W
R112	NRVA62D-471	M.F.RESISTOR	470 1/16W
R113	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R114	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R115	QRSA08J-391	M.G.RESISTOR	390 1/10W
R116	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R117	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R118	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R119	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R120	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R121	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R122	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R123	QRD161J-330	C.RESISTOR	33 1/6W
R124	QRD161J-820	C.RESISTOR	82 1/6W
R125	QRSA08J-123	M.G.RESISTOR	12K 1/10W
R126	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R127	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R128	QRSA08J-471	M.G.RESISTOR	470 1/10W
R129	QRSA08J-750	M.G.RESISTOR	75 1/10W
R130	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R131	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R132	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W BR-S800

Symbol No.	Part No.	Part Name	Description
R133	QRSA08J-680	M.G.RESISTOR	68 1/10W
R135	QRSA08J-393	M.G.RESISTOR	39K 1/10W BR S800
R136	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W BR-S800
R137	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W BR-S800
R138	QRSA08J 103	M.G.RESISTOR	10K 1/10W BR-S800
R139	QRSA08J-181	M.G.RESISTOR	180 1/10W
R140	QRSA08J-221	M.G.RESISTOR	220 1/10W
R141	QRSA08J-821	M.G.RESISTOR	820 1/10W
R142	QRSA08J-182	M.G.RESISTOR	1.8K 1/10W
R144	QRSA08J-362	M.G.RESISTOR	3.6K 1/10W
R145	QRSA08J-563	M.G.RESISTOR	56K 1/10W
R146	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R147	QVPB609-103	TRIM.RESISTOR	10K 320fH ADJ
R148	QRSA08J-181	M.G.RESISTOR	180 1/10W
R150	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R151	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R152	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R153	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R154	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R155	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R156	QVPB609-501	TRIM.RESISTOR	500 CNR ADJ2
R157	QRSA08J-561	M.G.RESISTOR	560 1/10W
R158	QRSA08J 181	M.G.RESISTOR	180 1/10W
R159	QVPB609-503	TRIM.RESISTOR	50K CNR ADJ1
R160	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R161	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R162	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R163	QRSA08J-392	M.G.RESISTOR	3.9K 1/10W
R164	QVPC625-503	TRIM.RESISTOR	50K 2H PHASE
R165	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R166	QVPC625-503	TRIM.RESISTOR	50K 1H PHASE
R167	QRSA08J-181	M.G.RESISTOR	180 1/10W
R168	QRSA08J-181	M.G.RESISTOR	180 1/10W
R169	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R170	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R171	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R172	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R173	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R174	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R175	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R176	QRSA08J 272	M.G.RESISTOR	2.7K 1/10W
R177	QRSA08J-100	M.G.RESISTOR	10 1/10W
R178	QRSA08J-821	M.G.RESISTOR	820 1/10W
R199	QRSA08J-563	M.G.RESISTOR	56K 1/10W
R200	QRSA08J-563	M.G.RESISTOR	56K 1/10W
R201	QVPC625-104	TRIM.RESISTOR	100K Y/C DELAY
R202	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R203	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R205	QRSA08J 562	M.G.RESISTOR	5.6K 1/10W
R206	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R207	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R208	QVPC625-103	TRIM.RESISTOR	10K C PHASE
R209	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R210	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R211	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R212	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R213	QRSA08J-333	M.G.RESISTOR	33K 1/10W
R214	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R215	QRSA08J-821	M.G.RESISTOR	820 1/10W

[VIDEO 1]

Symbol No.	Part No.	Part Name	Description
R216	QRSA08J 222	M.G.RESISTOR	2.2K 1/10W
R217	QVPC625-102	TRIM.RESISTOR	1K BURST LEVEL
R218	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R219	QVPC625-103	TRIM.RESISTOR	10K CAR BAL1
R220	QVPC625-103	TRIM.RESISTOR	10K CAR BAL2
R221	QVPC625-103	TRIM.RESISTOR	10K C LEVEL
R222	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R223	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R224	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R225	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R226	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R227	QRSA08J-753	M.G.RESISTOR	75K 1/10W
R228	QRSA08J-124	M.G.RESISTOR	120K 1/10W
R229	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R230	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R231	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R232	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R233	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R234	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R235	QRSA08J-121	M.G.RESISTOR	120 1/10W
R236	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R237	QRSA08J-821	M.G.RESISTOR	820 1/10W
R238	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R239	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R240	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R241	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R242	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R243	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R244	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R245	QRSA08J-822	M.G.RESISTOR	8.2K 1/10W
R246	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R247	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R248	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R249	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R250	QVPB609-102	TRIM.RESISTOR	1K DOC LEVEL
R251	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R252	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R253	QVPB609-102	TRIM.RESISTOR	1K DOC PHASE
R254	QRSA08J 152	M.G.RESISTOR	1.5K 1/10W
R255	QRSA08J-471	M.G.RESISTOR	470 1/10W
R256	QRSA08J-471	M.G.RESISTOR	470 1/10W
R257	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R258	QVPC625-501	TRIM.RESISTOR	500 2H LEVEL
R259	QVPC625-501	TRIM.RESISTOR	500 1H LEVEL
R261	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R262	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R263	QRSA08J-391	M.G.RESISTOR	390 1/10W BR-S800
R264	QRSA08J-333	M.G.RESISTOR	33K 1/10W
R265	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R266	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R267	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R268	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R269	NRVA62D-102	M.F.RESISTOR	1.0K 1/16W
R270	QRSA08J-101	M.G.RESISTOR	100 1/10W
R271	NRVA02D-1151	M.F.RESISTOR	1.15K 1/10W
R272	QRSA08J-333	M.G.RESISTOR	33K 1/10W
R273	QRSA08J-822	M.G.RESISTOR	8.2K 1/10W
R274	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R275	NRVA62D-561	M.F.RESISTOR	560 1/16W
R276	QRSA08J-101	M.G.RESISTOR	100 1/10W

Symbol No.	Part No.	Part Name	Description
R277	NRVA62D 222	M.F.RESISTOR	2.2K 1/16W
R281	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R282	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R283	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R284	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R285	QRSA08J-272	M.G.RESISTOR	2.7K 1/10W
R286	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R287	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R288	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R290	QRSA08J-101	M.G.RESISTOR	100 1/10W BR-S800
R292	QRSA08J-331	M.G.RESISTOR	330 1/10W
R293	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R294	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R295	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R296	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R297	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R298	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R299	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R301	QRSA08J-272	M.G.RESISTOR	2.7K 1/10W
R302	QRSA08J 271	M.G.RESISTOR	270 1/10W
R303	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R304	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R305	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R306	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W
R307	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R309	QRSA08J-561	M.G.RESISTOR	560 1/10W
R310	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R311	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R312	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R313	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R314	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R315	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R316	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R317	QRSA08J 223	M.G.RESISTOR	22K 1/10W
R319	QRSA08J-183	M.G.RESISTOR	18K 1/10W BR-S800
R320	QRSA08J-681	M.G.RESISTOR	680 1/10W BR-S800
R321	QRSA08J-471	M.G.RESISTOR	470 1/10W BR-S800
R322	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R323	QRSA08J-154	M.G.RESISTOR	150K 1/10W
R324	QRSA08J-390	M.G.RESISTOR	39 1/10W
R325	QRSA08J-750	M.G.RESISTOR	75 1/10W BR-S800
R326	QRSA08J-750	M.G.RESISTOR	75 1/10W BR-S800
R327	QRSA08J-750	M.G.RESISTOR	75 1/10W BR-S800
R328	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R329	QRSA08J 821	M.G.RESISTOR	820 1/10W
R331	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R332	QRSA08J-331	M.G.RESISTOR	330 1/10W
R333	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R334	QRSA08J 222	M.G.RESISTOR	2.2K 1/10W BR-S800
R336	QRSA08J 223	M.G.RESISTOR	22K 1/10W
R338	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R339	QRSA08J 331	M.G.RESISTOR	330 1/10W
C1	QETA1CM-107	E.CAPACITOR	100 16V BR-S800
C2	QETA1CM-107	E.CAPACITOR	100 16V BR-S800
C3	QETA1AM-226	E.CAPACITOR	22 10V BR-S800
C4	QETA1AM-226	E.CAPACITOR	22 10V BR-S800
C5	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C6	QETA1CM-476	E.CAPACITOR	47 16V BR-S800

Symbol No.	Part No.	Part Name	Description
C7	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR S800
C8	QCYA1HK-332	CER.CAPACITOR	3300P 50V BR S800
C9	QCYA1EK 103	CER.CAPACITOR	0.010 25V BR-S800
C10	QCYA1EK 473	CER.CAPACITOR	0.047 25V BR-S800
C11	QETA1EM-475	E.CAPACITOR	4.7 25V BR S800
C12	QETA1EM-475	E.CAPACITOR	4.7 25V BR-S800
C13	QCYA1EK 103	CER.CAPACITOR	0.010 25V BR-S800
C14	QCYA1EK 103	CER.CAPACITOR	0.010 25V BR S800
C15	QCYA1EK 103	CER.CAPACITOR	0.010 25V BR S800
C16	QETA1CM-476	E.CAPACITOR	47 16V BR-S800
C17	QETA1CM-476	E.CAPACITOR	47 16V BR S800
C18	QETA1CM 107	E.CAPACITOR	100 16V BR S800
C20	QETA1CM-106	E.CAPACITOR	10 16V BR S800
C21	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C22	QETA1CM 476	E.CAPACITOR	47 16V BR-S800
C23	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR S800
C24	QCFA1EZ-104	CER.CAPACITOR	0.10 25V BR S800
C25	QCTA1CH-390	CER.CAPACITOR	39P 50V BR-S800
C26	QCYA1HK-102	CER.CAPACITOR	1000P 50V BR-S800
C27	QCFA1EZ 104	CER.CAPACITOR	0.10 25V BR S800
C28	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C29	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C30	QCFA1EZ 104	CER.CAPACITOR	0.10 25V BR-S800
C31	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR S800
C32	QCTA1CH 100	CER.CAPACITOR	10P 50V BR-S800
C33	QCFA1EZ 104	CER.CAPACITOR	0.10 25V BR-S800
C34	QCYA1EK-104	CER.CAPACITOR	0.10 25V BR S800
C35	QCFA1EZ-104	CER.CAPACITOR	0.10 25V BR-S800
C36	QCFA1EZ-104	CER.CAPACITOR	0.10 25V BR-S800
C37	QCYA1EK-104	CER.CAPACITOR	0.10 25V BR-S800
C38	QCYA1EK-104	CER.CAPACITOR	0.10 25V BR S800
C39	QETA1AM-476	E.CAPACITOR	47 10V BR-S800
C40	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C41	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR S800
C42	QETA1CM-107	E.CAPACITOR	100 16V BR-S800
C43	QETA1CM-107	E.CAPACITOR	100 16V BR-S800
C44	QCTA1CH-680	CER.CAPACITOR	68P 50V BR S800
C45	QETA1CM-107	E.CAPACITOR	100 16V BR-S800
C46	QETA1CM-107	E.CAPACITOR	100 16V BR-S800
C47	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C48	QETA1CM 476	E.CAPACITOR	47 16V BR-S800
C49	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C50	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR S800
C51	QCYA1EK-223	CER.CAPACITOR	0.022 25V BR S800
C52	QCYA1EK 223	CER.CAPACITOR	0.022 25V BR S800
C54	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR S800
C55	QETA1CM-476	E.CAPACITOR	47 16V BR S800
C56	QCYA1EK 103	CER.CAPACITOR	0.010 25V BR S800
C57	QETA1CM-107	E.CAPACITOR	100 16V
C58	QETA1HM-225	E.CAPACITOR	2.2 50V BR-S800
C59	QETA1HM-225	E.CAPACITOR	2.2 50V
C60	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C61	QETA1CM-107	E.CAPACITOR	100 16V
C62	QETA1HM-105	E.CAPACITOR	1.0 50V
C63	QETA1CM-476	E.CAPACITOR	47 16V
C64	QETA0JM-227	E.CAPACITOR	220 6.3V
C65	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C66	QETA1CM-476	E.CAPACITOR	47 16V
C67	QCYA1EK-103	CER.CAPACITOR	0.010 25V

Symbol No.	Part No.	Part Name	Description
C68	QCYA1EK-223	CER.CAPACITOR	0.022 25V BR-S800
C69	QCYA1EK 223	CER.CAPACITOR	0.022 25V BR-S800
C70	QCYA1EK-223	CER.CAPACITOR	0.022 25V BR S800
C71	QCYA1EK 223	CER.CAPACITOR	0.022 25V BR-S800
C72	QCYA1EK-223	CER.CAPACITOR	0.022 25V
C73	QCYA1EK 223	CER.CAPACITOR	0.022 25V
C74	QCYA1EK-223	CER.CAPACITOR	0.022 25V
C75	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C76	QETA1CM-476	E.CAPACITOR	47 16V
C77	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C78	QETA1CM-107	E.CAPACITOR	100 16V
C79	QETA1CM-107	E.CAPACITOR	100 16V
C80	QETA1HM-105	E.CAPACITOR	1.0 50V
C81	QETA1CM-476	E.CAPACITOR	47 16V
C82	QETA0JM-227	E.CAPACITOR	220 6.3V
C83	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C84	QETA1CM-476	E.CAPACITOR	47 16V
C85	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C86	QCTA1CH-390	CER.CAPACITOR	39P 50V BR-S800
C87	QETA1HM-225	E.CAPACITOR	2.2 50V
C88	QCTA1CH-470	CER.CAPACITOR	47P 50V BR-S800
C89	PU57672-200	TRIMER CAP	20P VCXO ADJ
C90	QCYA1HK 102	CER.CAPACITOR	1000P 50V
C91	QCTA1CH 180	CER.CAPACITOR	18P 50V
C92	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C93	QETA1HM 225	E.CAPACITOR	2.2 50V
C94	QCTA1CH 221	CER.CAPACITOR	220P 50V
C95	QETA1HM-225	E.CAPACITOR	2.2 50V
C96	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C97	QCTA1CH-471	CER.CAPACITOR	470P 50V
C98	QCYA1EK 104	CER.CAPACITOR	0.10 25V
C99	QETA1HM-105	E.CAPACITOR	1.0 50V
C100	QCYA1HK-153	CER.CAPACITOR	0.015 50V
C101	QETA1EM-475	E.CAPACITOR	4.7 25V
C103	QETA0JM-337	E.CAPACITOR	330 6.3V
C105	QETA0JM-337	E.CAPACITOR	330 6.3V
C106	QCTA2CH-560	CER.CAPACITOR	56P 50V
C107	QETA1EM-475	E.CAPACITOR	4.7 25V
C108	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C109	QETA1AM-476	E.CAPACITOR	47 10V
C111	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C112	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C113	QETA1HM-105	E.CAPACITOR	1.0 50V
C114	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C115	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C116	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C117	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C118	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C119	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C120	QCYA1EK-223	CER.CAPACITOR	0.022 25V
C121	QETA1AM-107	E.CAPACITOR	100 10V
C122	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C123	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C124	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C125	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C126	QETA1EM 475	E.CAPACITOR	4.7 25V
C127	QETA1EM-475	E.CAPACITOR	4.7 25V
C128	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C129	QETA1HM 224	E.CAPACITOR	0.22 50V

[VIDEO 1]

Symbol No.	Part No.	Part Name	Description
C130	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C131	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C132	QCTA1CH-120	CER.CAPACITOR	12P 50V
C133	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C134	QETA1EM-475	E.CAPACITOR	4.7 25V
C135	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C136	QETA1EM-475	E.CAPACITOR	4.7 25V
C137	QETA1HM-105	E.CAPACITOR	1.0 50V
C138	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C139	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C140	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C141	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C142	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C143	QETA1CM-106	E.CAPACITOR	10 16V
C144	QCYA1HK-472	CER.CAPACITOR	4700P 50V
C145	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C146	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C147	QETA1CM-106	E.CAPACITOR	10 16V
C157	QETA1CM-476	E.CAPACITOR	47 16V
C158	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C159	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C160	QCYA1EK-683	CER.CAPACITOR	0.068 25V
C161	QCYA1HK-273	CER.CAPACITOR	0.027 50V
C163	QETA1AM-107	E.CAPACITOR	100 10V
C164	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C165	QETA1AM 107	E.CAPACITOR	100 10V
C166	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C167	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C168	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C169	QCTA1CH-270	CER.CAPACITOR	27P 50V
C170	QCTA1CH-680	CER.CAPACITOR	68P 50V
C171	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C172	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C173	QETA1AM-107	E.CAPACITOR	100 10V
C174	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C176	QCYA1EK-683	CER.CAPACITOR	0.068 25V
C177	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C178	QCTA1CH-680	CER.CAPACITOR	68P 50V
C179	QCTA1CH-270	CER.CAPACITOR	27P 50V
C180	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C181	QCYA1EK-683	CER.CAPACITOR	0.068 25V
C182	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C183	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C184	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C185	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C186	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C187	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C188	QCTA1CH-151	CER.CAPACITOR	150P 50V
C189	QCTA1CH-471	CER.CAPACITOR	470P 50V
C190	QCYA1HK-153	CER.CAPACITOR	0.015 50V
C191	QETA1HM-105	E.CAPACITOR	1.0 50V
C192	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C193	QCYA1EK-473	CER.CAPACITOR	0.047 25V
C194	QCYA1EK-473	CER.CAPACITOR	0.047 25V
C195	QCYA1EK-473	CER.CAPACITOR	0.047 25V
C196	QCYA1EK-473	CER.CAPACITOR	0.047 25V
C197	QCYA1EK-683	CER.CAPACITOR	0.068 25V
C198	QCTA1CH-151	CER.CAPACITOR	150P 50V
C200	QETA1AM-476	E.CAPACITOR	47 10V

Symbol No.	Part No.	Part Name	Description
C201	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C202	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C203	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C204	QRSA08J-0R0	MGR	0 1/10W
C205	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C206	QCYA1EK 223	CER.CAPACITOR	0.022 25V
C207	QCYA1EK 223	CER.CAPACITOR	0.022 25V
C208	QCTA1CH-150	CER.CAPACITOR	15P 50V
C209	QETA1CM-476	E.CAPACITOR	47 16V
C210	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C211	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C212	QETA1CM-476	E.CAPACITOR	47 16V
C213	QETA1CM-476	E.CAPACITOR	47 16V
C214	QETA1CM-476	E.CAPACITOR	47 16V
C215	QETA1AM-107	E.CAPACITOR	100 10V
C216	QETA1CM-107	E.CAPACITOR	100 16V
C217	QCTA1CH 270	CER.CAPACITOR	27P 50V
C218	QETA1CM-107	E.CAPACITOR	100 16V
C219	QCTA1CH-270	CER.CAPACITOR	27P 50V
C221	QCTA2CH-150	CER.CAPACITOR	15P 50V
C222	QCTA1CH-391	CER.CAPACITOR	390P 50V
C223	QCYA1EK-223	CER.CAPACITOR	0.022 25V
C224	QETA1CM-106	E.CAPACITOR	10 16V
C225	QETA1CM-106	E.CAPACITOR	10 16V
C226	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C227	QETA1CM 476	E.CAPACITOR	47 16V
C228	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C232	QCYA1HK-183	CER.CAPACITOR	0.018 50V
C234	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C235	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C236	QCTA1CH-101	CER.CAPACITOR	100P 50V
C237	QCYA1HK 102	CER.CAPACITOR	1000P 50V
C239	QCTA1CH-331	CER.CAPACITOR	330P 50V
C240	QCYA1EK-223	CER.CAPACITOR	0.022 25V
C241	QCTA1CH 560	CER.CAPACITOR	56P 50V
C242	QCYA1EK 223	CER.CAPACITOR	0.022 25V
C243	QCTA1CH-101	CER.CAPACITOR	100P 50V
C244	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C247	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C248	QCTA1CH-220	CER.CAPACITOR	22P 50V
C250	QETA1AM-107	E.CAPACITOR	100 10V
C252	QCF31HP-102	CER.CAPACITOR	1000P 50V BR-S800
L2	PU48530-101	PEAKING COIL	100μH BR-S800
L3	PU48530-221	PEAKING COIL	220μH BR-S800
L4	PU48530-101	PEAKING COIL	100μH BR-S800
L5	PU48530-221	PEAKING COIL	220μH BR-S800
L6	PU48530-221	PEAKING COIL	220μH BR-S800
L7	PU48530-221	PEAKING COIL	220μH
L8	PU48530-221	PEAKING COIL	220μH
L9	PU48530-221	PEAKING COIL	220μH
L10	PU48530-2R2	PEAKING COIL	2.2μH BR-S800
L11	PU48530-470	PEAKING COIL	47μH
L14	PU48530-180	PEAKING COIL	18μH
L16	PU48530-101	PEAKING COIL	100μH
L17	PU48530-471	PEAKING COIL	470μH
L18	PU48530-330	PEAKING COIL	33μH
L19	PU48530-101	PEAKING COIL	100μH
L20	PU48530-221	PEAKING COIL	220μH

6.5 VIDEO 2 BOARD ASSEMBLY LIST [1][1]

PRK20228A-07 (BR-S800)

PRK20228B-07 (BR-S500)

[1][1] [ ][ ][ ][ ]

Symbol No.	Part No.	Part Name	Description	
L22	PU48530-680	PEAKING COIL	68μH	
L23	PU48530-270	PEAKING COIL	27μH	
L24	PU48530-270	PEAKING COIL	27μH	
L25	PU48530-680	PEAKING COIL	68μH	
L26	PU48530-101	PEAKING COIL	100μH	
L27	PU48530-101	PEAKING COIL	100μH	
L29	PU48530-221	PEAKING COIL	220μH	
L30	PU48530-221	PEAKING COIL	220μH	
L33	YU41134-180	COIL	18μH	
BF1	PU61058	BPF	BPF1	
BF2	PGZ01943	BPF	BPF2	
BF3	PELN0343	BPF	BPF3	
LC1	PGZ02064	LPF	LPF1	BR-S800
LC2	PGZ02065	LPF	LPF2	BR-S800
LC3	PGZ02065	LPF	LPF3	BR-S800
X1	PEVB0347	CRYSTAL		
TH2	ERT-D2FGL102	THERMISTOR		
TH3	ERT-D2FGL102	THERMISTOR		
SW1	PU54440	SWITCH	ADJUSTING	
CN1	PGZ01937-44	CONNECTOR	44PIN	
CN2	PGZ01937-44	CONNECTOR	44PIN	
TP1	SQMX001-001	TEST POINT		
⚠K1	PGZ00627	FERRATE BEADS		BR-S500
⚠K2	PGZ00627	FERRATE BEADS		BR-S500
⚠K3	PGZ00627	FERRATE BEADS		BR-S500
⚠K4	PGZ00627	FERRATE BEADS		BR-S500
SP1	PGZ01128-02	SPACER		
SP2	PRD30030-125	PAD		BR-S500

Symbol No.	Part No.	Part Name	Description	
IC1	TL8825F	I.C.(M)	TEXAS	
IC2	VC2076MP	I.C.(M)	HITACHI	
IC3	TC74HC04AF	I.C.(M)	TOSHIBA	
IC4	JCP0032	I.C.(M)	JVC	
IC5	CXL5509M	I.C.(M)	SONY	
IC8	TC4S30F	I.C.(M)	TOSHIBA	
IC9	M5278L09	I.C.(M)	MITSUBISHI	
IC10	TC4S30F	I.C.(M)	TOSHIBA	
Q1	2SC2412K(RS)	TRANSISTOR	ROHM	
Q2	2SC2412K(RS)	TRANSISTOR	ROHM	
Q3	2SA1037K(QR)	TRANSISTOR	ROHM	
Q4	2SA1037K(QR)	TRANSISTOR	ROHM	
Q5	2SC2412K(RS)	TRANSISTOR	ROHM	
Q6	2SC2412K(RS)	TRANSISTOR	ROHM	
Q7	2SA1037K(QR)	TRANSISTOR	ROHM	
Q8	2SA1037K(QR)	TRANSISTOR	ROHM	
Q9	2SC2412K(RS)	TRANSISTOR	ROHM	
Q10	2SC2412K(RS)	TRANSISTOR	ROHM	
Q11	DTC124EK	TRANSISTOR	ROHM	
Q12	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q13	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q14	2SA1037K(QR)	TRANSISTOR	ROHM	BR-S800
Q15	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q16	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q17	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q18	2SA1037K(QR)	TRANSISTOR	ROHM	BR-S800
Q19	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q20	2SC2412K(RS)	TRANSISTOR	ROHM	
Q21	2SC2412K(RS)	TRANSISTOR	ROHM	
Q22	DTC144EK	TRANSISTOR	ROHM	
Q23	2SC2412K(RS)	TRANSISTOR	ROHM	
Q24	2SC2412K(RS)	TRANSISTOR	ROHM	
Q25	2SC2412K(RS)	TRANSISTOR	ROHM	
Q27	2SA1037K(QR)	TRANSISTOR	ROHM	
Q28	DTC144EK	TRANSISTOR	ROHM	BR-S800
Q29	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q30	2SA1037K(QR)	TRANSISTOR	ROHM	BR-S800
Q31	2SC2412K(RS)	TRANSISTOR	ROHM	BR-S800
Q32	2SA1037K(QR)	TRANSISTOR	ROHM	
Q33	DTA124EK	TRANSISTOR	ROHM	
Q34	2SC2412K(RS)	TRANSISTOR	ROHM	
Q35	2SA1037K(QR)	TRANSISTOR	ROHM	
Q36	2SC2412K(RS)	TRANSISTOR	ROHM	
Q38	DTC124EK	TRANSISTOR	ROHM	
Q39	2SC2412K(RS)	TRANSISTOR	ROHM	
Q41	DTC124EK	TRANSISTOR	ROHM	
Q42	DTC144WK	TRANSISTOR	ROHM	
Q43	DTC144EK	TRANSISTOR	ROHM	
Q44	DTC144EK	TRANSISTOR	ROHM	
Q45	2SC2412K(RS)	TRANSISTOR	ROHM	
Q46	DTC144EK	TRANSISTOR	ROHM	
Q47	DTC144EK	TRANSISTOR	ROHM	
Q48	DTC144EK	TRANSISTOR	ROHM	
Q49	2SA1037K(QR)	TRANSISTOR	ROHM	
Q51	2SC2412K(RS)	TRANSISTOR	ROHM	
Q52	2SC2412K(RS)	TRANSISTOR	ROHM	
Q53	2SC2412K(RS)	TRANSISTOR	ROHM	
Q54	2SC2412K(RS)	TRANSISTOR	ROHM	

[VIDEO 2]

Symbol No.	Part No.	Part Name	Description
Q55	DTC144EK	TRANSISTOR	ROHM
Q56	DTC144EK	TRANSISTOR	ROHM
Q57	2SC2412K(RS)	TRANSISTOR	ROHM
Q58	DTC144EK	TRANSISTOR	ROHM
Q59	2SA1037K(QR)	TRANSISTOR	ROHM
Q60	2SA1037K(QR)	TRANSISTOR	ROHM
Q61	2SC2412K(RS)	TRANSISTOR	ROHM
Q62	2SC2412K(RS)	TRANSISTOR	ROHM
Q65	2SC2412K(RS)	TRANSISTOR	ROHM
Q66	2SA1037K(QR)	TRANSISTOR	ROHM
Q67	2SC2412K(RS)	TRANSISTOR	ROHM
Q69	2SC2412K(RS)	TRANSISTOR	ROHM
Q72	2SC2412K(RS)	TRANSISTOR	ROHM
Q73	2SC2412K(RS)	TRANSISTOR	ROHM
Q74	2SC2412K(RS)	TRANSISTOR	ROHM
Q75	2SC2412K(RS)	TRANSISTOR	ROHM
Q76	2SC2412K(RS)	TRANSISTOR	ROHM
Q77	2SC2412K(RS)	TRANSISTOR	ROHM
Q78	2SC2412K(RS)	TRANSISTOR	ROHM
Q79	2SA1037K(QR)	TRANSISTOR	ROHM
Q80	2SC2412K(RS)	TRANSISTOR	ROHM
Q81	2SC2412K(RS)	TRANSISTOR	ROHM
Q82	2SA1037K(QR)	TRANSISTOR	ROHM
Q83	2SC2412K(RS)	TRANSISTOR	ROHM
Q84	2SC2412K(RS)	TRANSISTOR	ROHM
Q85	2SA1037K(QR)	TRANSISTOR	ROHM
Q86	2SC2412K(RS)	TRANSISTOR	ROHM
Q87	2SA1037K(QR)	TRANSISTOR	ROHM
Q88	2SC2412K(RS)	TRANSISTOR	ROHM
Q89	2SD601A(QR)	TRANSISTOR	MATSUSHITA BR-S800
Q90	2SB709A(QR)	TRANSISTOR	MATSUSHITA BR-S800
Q91	DTC144EK	TRANSISTOR	ROHM BR-S800
Q92	DTC144EK	TRANSISTOR	ROHM BR-S800
Q93	2SD601A(QR)	TRANSISTOR	MATSUSHITA BR-S800
Q96	2SA1037K(QR)	TRANSISTOR	ROHM
Q97	2SA1037K(QR)	TRANSISTOR	ROHM
Q101	2SC2412K(RS)	TRANSISTOR	ROHM
Q102	2SA1037K(QR)	TRANSISTOR	ROHM
Q103	2SC2412K(RS)	TRANSISTOR	ROHM
Q104	2SA1037K(QR)	TRANSISTOR	ROHM
Q105	2SC2412K(RS)	TRANSISTOR	ROHM
Q106	DTC144EK	TRANSISTOR	ROHM
Q107	DTC144EK	TRANSISTOR	ROHM
Q110	DTC144EK	TRANSISTOR	ROHM
Q111	DTC114EK	TRANSISTOR	ROHM
Q112	2SC2412K(RS)	TRANSISTOR	ROHM
Q113	2SA1037K(QR)	TRANSISTOR	ROHM
Q114	2SC2412K(RS)	TRANSISTOR	ROHM
Q115	2SC2412K(RS)	TRANSISTOR	ROHM
Q117	DTC144EK	TRANSISTOR	ROHM
Q118	DTA144EK	TRANSISTOR	ROHM
Q119	2SC2412K(RS)	TRANSISTOR	ROHM
Q120	2SC2412K(RS)	TRANSISTOR	ROHM
Q121	2SA1037K(QR)	TRANSISTOR	ROHM
Q122	DTC144EK	TRANSISTOR	ROHM
Q123	2SA1037K(QR)	TRANSISTOR	ROHM
Q124	2SC2412K(RS)	TRANSISTOR	ROHM
Q125	2SA1037K(QR)	TRANSISTOR	ROHM

Symbol No.	Part No.	Part Name	Description
D1	1SS99	DIODE	NEC
D2	1SS99	DIODE	NEC
D3	DAN202K	DIODE	ROHM
D4	DAN202K	DIODE	ROHM
D5	DAN202K	DIODE	ROHM
D6	DAN202K	DIODE	ROHM
D7	DAN202K	DIODE	ROHM
D11	DAN202K	DIODE	ROHM
D14	DAN202K	DIODE	ROHM
D15	DAN202K	DIODE	ROHM
D17	DAN202K	DIODE	ROHM
D18	DAN202K	DIODE	ROHM
D19	DAN202K	DIODE	ROHM
D20	DAP202K	DIODE	ROHM
D22	1SS99	DIODE	NEC BR-S800
D23	1SS99	DIODE	NEC BR-S800
D24	1SS99	DIODE	NEC
D25	DAN202K	DIODE	ROHM
D27	DAP202K	DIODE	ROHM
D28	DAN202K	DIODE	ROHM
D30	DAN202K	DIODE	ROHM BR-S800
D31	DAN202K	DIODE	ROHM
R1	QRSA08J-561	M.G.RESISTOR	560 1/10W
R2	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R3	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R4	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R5	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R6	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R7	QRSA08J-471	M.G.RESISTOR	470 1/10W
R8	QRSA08J-272	M.G.RESISTOR	2.7K 1/10W
R9	QRSA08J-100	M.G.RESISTOR	10 1/10W
R10	QRSA08J-821	M.G.RESISTOR	820 1/10W
R11	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R12	QVPB609-501	TRIM.RESISTOR	500 YNR NC BAL
R13	QRSA08J-511	M.G.RESISTOR	510 1/10W
R14	QRSA08J-561	M.G.RESISTOR	560 1/10W
R15	QRSA08J-471	M.G.RESISTOR	470 1/10W
R16	QRSA08J-471	M.G.RESISTOR	470 1/10W
R17	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R18	NRVA62D-272	M.F.RESISTOR	2.7K 1/16W
R19	NRVA62D-332	M.F.RESISTOR	3.3K 1/16W
R20	NRVA62D-151	M.F.RESISTOR	150 1/16W
R21	NRVA62D-162	M.F.RESISTOR	1.6K 1/16W
R22	NRVA62D-391	M.F.RESISTOR	390 1/16W
R23	NRVA62D-102	M.F.RESISTOR	1.0K 1/16W
R24	NRVA62D-102	M.F.RESISTOR	1.0K 1/16W
R25	NRVA62D-102	M.F.RESISTOR	1.0K 1/16W
R26	NRVA62D-152	M.F.RESISTOR	1.5K 1/16W
R27	NRVA62D-471	M.F.RESISTOR	470 1/16W
R28	NRVA62D-332	M.F.RESISTOR	3.3K 1/16W
R29	NRVA62D-332	M.F.RESISTOR	3.3K 1/16W
R30	NRVA62D-561	M.F.RESISTOR	560 1/16W
R31	QVPB609-102	TRIM.RESISTOR	1K S W/D CLIP1 BR-S800
R32	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R33	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R34	QRSA08J-392	M.G.RESISTOR	3.9K 1/10W
R35	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R36	QRSA08J-103	M.G.RESISTOR	10K 1/10W

Symbol No.	Part No.	Part Name	Description
R37	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R38	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R39	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R40	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R41	QVPC625-201	TRIM.RESISTOR	200 SUB EMPHA BR-S800
R42	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R43	QRSA08J-242	M.G.RESISTOR	2.4K 1/10W
R44	QRSA08J-391	M.G.RESISTOR	390 1/10W
R45	QRSA08J-561	M.G.RESISTOR	560 1/10W BR-S800
R46	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R47	QRSA08J-183	M.G.RESISTOR	18K 1/10W BR-S800
R48	QRSA08J-103	M.G.RESISTOR	10K 1/10W BR-S800
R49	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R50	QRSA08J-561	M.G.RESISTOR	560 1/10W BR-S800
R51	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R52	QRSA08J-561	M.G.RESISTOR	560 1/10W BR-S800
R53	QRSA08J-471	M.G.RESISTOR	470 1/10W BR-S800
R54	QVPB609-501	TRIM.RESISTOR	500 S REC C BR-S800
R55	QRSA08J-101	M.G.RESISTOR	100 1/10W BR-S800
R56	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W BR-S800
R57	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R58	QRSA08J-151	M.G.RESISTOR	150 1/10W BR-S800
R59	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R60	QRSA08J-103	M.G.RESISTOR	10K 1/10W BR-S800
R61	QRSA08J-103	M.G.RESISTOR	10K 1/10W BR-S800
R62	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R63	QVPB609-501	TRIM.RESISTOR	500 S REC FM BR-S800
R64	QRSA08J-331	M.G.RESISTOR	330 1/10W BR-S800
R65	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W BR-S800
R66	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R67	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R68	QRSA08J-561	M.G.RESISTOR	560 1/10W BR-S800
R69	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R70	QRSA08J-561	M.G.RESISTOR	560 1/10W BR-S800
R71	QRSA08J-471	M.G.RESISTOR	470 1/10W BR-S800
R72	QVPB609-501	TRIM.RESISTOR	500 N REC C BR-S800
R73	QRSA08J-101	M.G.RESISTOR	100 1/10W BR-S800
R74	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W BR-S800
R75	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R76	QRSA08J-151	M.G.RESISTOR	150 1/10W BR-S800
R77	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R78	QRSA08J-103	M.G.RESISTOR	10K 1/10W BR-S800
R79	QRSA08J-103	M.G.RESISTOR	10K 1/10W BR-S800
R80	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R81	QVPB609-501	TRIM.RESISTOR	500 N REC FM BR-S800
R82	QRSA08J-331	M.G.RESISTOR	330 1/10W BR-S800
R83	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R84	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R85	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R86	QVPB609-202	TRIM.RESISTOR	2K TRACKING DC
R87	QRSA08J-681	M.G.RESISTOR	680 1/10W
R88	QRSA08J-101	M.G.RESISTOR	100 1/10W
R89	QRSA08J-101	M.G.RESISTOR	100 1/10W
R90	QRSA08J-561	M.G.RESISTOR	560 1/10W
R91	QRSA08J-560	M.G.RESISTOR	56 1/10W
R92	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R93	QRSA08J-182	M.G.RESISTOR	1.8K 1/10W
R94	QRSA08J-561	M.G.RESISTOR	560 1/10W
R95	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W

Symbol No.	Part No.	Part Name	Description
R96	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R97	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R98	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R99	QRSA08J-821	M.G.RESISTOR	820 1/10W
R101	QRSA08J-391	M.G.RESISTOR	390 1/10W
R103	QRSA08J-561	M.G.RESISTOR	560 1/10W
R104	QRSA08J-561	M.G.RESISTOR	560 1/10W
R106	QRSA08J 561	M.G.RESISTOR	560 1/10W
R109	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R110	QRSA08J-161	M.G.RESISTOR	160 1/10W BR S800
R111	QRSA08J-681	M.G.RESISTOR	680 1/10W BR-S800
R112	QRSA08J 101	M.G.RESISTOR	100 1/10W BR-S800
R113	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R114	QRSA08J-391	M.G.RESISTOR	390 1/10W BR-S800
R115	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R116	QRSA08J-391	M.G.RESISTOR	390 1/10W BR S800
R117	QRSA08J-223	M.G.RESISTOR	22K 1/10W BR S800
R119	QRSA08J-183	M.G.RESISTOR	18K 1/10W BR-S800
R121	QVPB609-502	TRIM.RESISTOR	5K S W/D CLIP2 BR-S800
R122	NRVA62D-104	M.F.RESISTOR	100K 1/16W BR-S800
R123	NRVA62D-152	M.F.RESISTOR	1.5K 1/16W BR-S800
R124	QVPB609-103	TRIM.RESISTOR	10K S CAR DEV 1 BR-S800
R125	QRSA08J 392	M.G.RESISTOR	3.9K 1/10W BR-S800
R126	QVPB609-103	TRIM.RESISTOR	10K N CAR DEV 1 BR-S800
R127	NRVA62D-822	M.F.RESISTOR	8.2K 1/16W BR S800
R128	QVPB609-502	TRIM.RESISTOR	5K N CAR DEV2 BR-S800
R129	NRVA62D 562	M.F.RESISTOR	5.6K 1/16W BR-S800
R130	NRVA62D-183	M.F.RESISTOR	18K 1/16W BR-S800
R131	NRVA62D-822	M.F.RESISTOR	8.2K 1/16W BR-S800
R132	QVPB609-502	TRIM.RESISTOR	5K S CAR DEV2 BR-S800
R133	NRVA62D-392	M.F.RESISTOR	3.9K 1/16W BR-S800
R134	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R135	QRSA08J-392	M.G.RESISTOR	3.9K 1/10W
R136	QRSA08J 272	M.G.RESISTOR	2.7K 1/10W
R137	QRSA08J-272	M.G.RESISTOR	2.7K 1/10W
R138	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R139	QRSA08J-272	M.G.RESISTOR	2.7K 1/10W
R140	QRSA08J-822	M.G.RESISTOR	8.2K 1/10W
R141	QRSA08J-181	M.G.RESISTOR	180 1/10W
R142	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R145	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R146	QVPB609-503	TRIM.RESISTOR	50K N W/D CLIP BR S800
R147	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
	QRSA08J-821	M.G.RESISTOR	820 1/10W BR-S500
R149	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R151	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R152	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R153	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R154	NRVA62D-152	M.F.RESISTOR	1.5K 1/16W
R155	NRVA62D-391	M.F.RESISTOR	390 1/16W
R157	NRVA62D-152	M.F.RESISTOR	1.5K 1/16W
R158	QRSA08J 182	M.G.RESISTOR	1.8K 1/10W
R160	NRVA62D-512	M.F.RESISTOR	5.1K 1/16W
R162	QRSA08J 223	M.G.RESISTOR	22K 1/10W
R163	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R164	QRSA08J-563	M.G.RESISTOR	56K 1/10W
R165	QRSA08J-563	M.G.RESISTOR	56K 1/10W
R166	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R167	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R168	QRSA08J-124	M.G.RESISTOR	120K 1/10W

[VIDEO 2]

Symbol No.	Part No.	Part Name	Description	
R169	QRSA08J 333	M.G.RESISTOR	33K	1/10W
R170	NRVA62D 562	M.F.RESISTOR	5.6K	1/16W
R171	QVPC625 502	TRIM.RESISTOR	5K	N VIDEO LEV
R172	NRVA62D-243	M.F.RESISTOR	24K	1/16W
R173	NRVA62D 123	M.F.RESISTOR	12K	1/16W
R174	QVPC625 203	TRIM.RESISTOR	20K	S VIDEO LEV
R175	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R176	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R177	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R178	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R179	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R180	QRSA08J-182	M.G.RESISTOR	1.8K	1/10W
R181	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W
R182	QRSA08J 333	M.G.RESISTOR	33K	1/10W
R183	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W
R184	QRSA08J-273	M.G.RESISTOR	27K	1/10W
R185	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R186	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R187	QRSA08J-331	M.G.RESISTOR	330	1/10W
R188	QVPC625-502	TRIM.RESISTOR	5K	N RF EQ CH1
R189	QVPC625 502	TRIM.RESISTOR	5K	N RF EQ CH2
R190	QRSA08J-183	M.G.RESISTOR	18K	1/10W
R191	QRSA08J-393	M.G.RESISTOR	39K	1/10W
R192	QRSA08J 0R0	M.G.RESISTOR	0	1/10W
R193	QRSA08J 821	M.G.RESISTOR	820	1/10W
R194	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
R195	QRSA08J-392	M.G.RESISTOR	3.9K	1/10W
R196	QRSA08J 0R0	M.G.RESISTOR	0	1/10W
R197	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R198	QRSA08J-393	M.G.RESISTOR	39K	1/10W
R199	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R200	QRSA08J 471	M.G.RESISTOR	470	1/10W
R201	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R202	QRSA08J-562	M.G.RESISTOR	5.6K	1/10W
R203	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W
R205	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W
R206	QRSA08J-471	M.G.RESISTOR	470	1/10W
R207	QRSA08J 333	M.G.RESISTOR	33K	1/10W
R208	QRSA08J 273	M.G.RESISTOR	27K	1/10W
R209	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R210	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R211	QRSA08J-471	M.G.RESISTOR	470	1/10W
R212	QVPC625 202	TRIM.RESISTOR	2K	S SP RF EQ1
R213	QVPC625 202	TRIM.RESISTOR	2K	S SP RF EQ2
R214	QRSA08J-333	M.G.RESISTOR	33K	1/10W
R215	QRSA08J 223	M.G.RESISTOR	22K	1/10W
R216	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R217	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R218	QVPC625-202	TRIM.RESISTOR	2K	S EP RF EQ
R219	QRSA08J 471	M.G.RESISTOR	470	1/10W
R220	QRSA08J-471	M.G.RESISTOR	470	1/10W
R221	QRSA08J-272	M.G.RESISTOR	2.7K	1/10W
R222	QRSA08J-561	M.G.RESISTOR	560	1/10W
R223	QRSA08J 152	M.G.RESISTOR	1.5K	1/10W
R224	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W
R225	QRSA08J-561	M.G.RESISTOR	560	1/10W
R226	QRSA08J-272	M.G.RESISTOR	2.7K	1/10W
R227	QRSA08J-561	M.G.RESISTOR	560	1/10W
R228	QRSA08J-105	M.G.RESISTOR	1.0M	1/10W

Symbol No.	Part No.	Part Name	Description	
R229	QRSA08J 823	M.G.RESISTOR	82K	1/10W
R230	QRSA08J 121	M.G.RESISTOR	120	1/10W
R231	QRSA08J 273	M.G.RESISTOR	27K	1/10W
R232	QRSA08J 682	M.G.RESISTOR	6.8K	1/10W
R233	QRSA08J-241	M.G.RESISTOR	240	1/10W
R234	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R235	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R242	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R243	QVPB609 102	TRIM.RESISTOR	1K	PB Y COMB1
R244	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R245	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W
R246	QRSA08J-391	M.G.RESISTOR	390	1/10W
R247	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W
R248	QRSA08J 391	M.G.RESISTOR	390	1/10W
R249	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W
R250	QRSA08J-271	M.G.RESISTOR	270	1/10W
R251	QRSA08J 273	M.G.RESISTOR	27K	1/10W
R252	QVPC625 103	TRIM.RESISTOR	10K	PB SYNC
R254	QRSA08J 273	M.G.RESISTOR	27K	1/10W
R255	QRSA08J 682	M.G.RESISTOR	6.8K	1/10W
R256	QRSA08J 221	M.G.RESISTOR	220	1/10W
R257	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R258	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R265	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R266	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R267	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R268	QRSA08J-181	M.G.RESISTOR	180	1/10W
R270	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R271	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R272	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R273	QVPB609 501	TRIM.RESISTOR	500	DELTA Y
R274	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R275	QRSA08J-393	M.G.RESISTOR	39K	1/10W
R276	QRSA08J 223	M.G.RESISTOR	22K	1/10W
R277	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R278	QRSA08J 102	M.G.RESISTOR	1.0K	1/10W
R279	QVPB609 502	TRIM.RESISTOR	5K	PB Y COMB2
R281	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W
R282	QRSA08J 561	M.G.RESISTOR	560	1/10W
R283	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R284	QRSA08J-393	M.G.RESISTOR	39K	1/10W
R285	QRSA08J 152	M.G.RESISTOR	1.5K	1/10W
R286	QRSA08J 331	M.G.RESISTOR	330	1/10W
R287	QRSA08J 562	M.G.RESISTOR	5.6K	1/10W
R288	QRSA08J-152	M.G.RESISTOR	1.5K	1/10W
R289	QRSA08J 333	M.G.RESISTOR	33K	1/10W
R290	QRSA08J 332	M.G.RESISTOR	3.3K	1/10W
R291	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R292	QRSA08J 331	M.G.RESISTOR	330	1/10W
R293	QRSA08J 225	M.G.RESISTOR	2.2M	1/10W
R294	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R295	QRSA08J-392	M.G.RESISTOR	3.9K	1/10W
R296	QRSA08J 560	M.G.RESISTOR	56	1/10W
R297	QRSA08J 182	M.G.RESISTOR	1.8K	1/10W
R298	QRSA08J-471	M.G.RESISTOR	470	1/10W
R299	QRSA08J 681	M.G.RESISTOR	680	1/10W
R300	QRSA08J 271	M.G.RESISTOR	270	1/10W
R301	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R302	QRSA08J-561	M.G.RESISTOR	560	1/10W

Symbol No.	Part No.	Part Name	Description
R303	QRSA08J-331	M.G.RESISTOR	330 1/10W
R304	QRSA08J-181	M.G.RESISTOR	180 1/10W
R305	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R306	QRSA08J-391	M.G.RESISTOR	390 1/10W
R308	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R309	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R310	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R311	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R312	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R313	QRSA08J-101	M.G.RESISTOR	100 1/10W
R314	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R315	QRSA08J-393	M.G.RESISTOR	39K 1/10W BR-S800
R316	QRSA08J-223	M.G.RESISTOR	22K 1/10W BR-S800
R317	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R318	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R319	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R320	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R321	QRSA08J-561	M.G.RESISTOR	560 1/10W BR-S800
R322	QRSA08J-561	M.G.RESISTOR	560 1/10W BR-S800
R331	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R332	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R334	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R335	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R336	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R337	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R338	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R340	QRSA08J-391	M.G.RESISTOR	390 1/10W
R343	QRSA08J-101	M.G.RESISTOR	100 1/10W
R344	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R345	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R346	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R356	QRSA08J-391	M.G.RESISTOR	390 1/10W
R357	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R358	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R359	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R360	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R361	QRSA08J-101	M.G.RESISTOR	100 1/10W
R362	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R363	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R364	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R365	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R366	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R367	QRSA08J-101	M.G.RESISTOR	100 1/10W
R368	QRSA08J-471	M.G.RESISTOR	470 1/10W
R369	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R371	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R372	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R374	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R376	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R377	QRSA08J-123	M.G.RESISTOR	12K 1/10W
R382	QRSA08J-331	M.G.RESISTOR	330 1/10W
R383	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R384	QRSA08J-333	M.G.RESISTOR	33K 1/10W
R385	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R386	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R387	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R388	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R389	QVPB609-103	TRIM.RESISTOR	10K DL TIME
R390	QRSA08J-273	M.G.RESISTOR	27K 1/10W

Symbol No.	Part No.	Part Name	Description
R391	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R392	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R393	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R394	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R395	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R396	QRSA08J 331	M.G.RESISTOR	330 1/10W
R397	QRSA08J-101	M.G.RESISTOR	100 1/10W
R398	QRSA08J-182	M.G.RESISTOR	1.8K 1/10W
R399	QRSA08J-561	M.G.RESISTOR	560 1/10W BR-S500
R400	QRSA08J-560	M.G.RESISTOR	56 1/10W BR S500
R401	QRSA08J-331	M.G.RESISTOR	330 1/10W BR-S500
R402	QRSA08J-181	M.G.RESISTOR	180 1/10W BR-S800
R403	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R404	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R405	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R406	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R407	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R408	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R409	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R410	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R411	QRSA08J-270	M.G.RESISTOR	27 1/10W
R413	QRSA08J-391	M.G.RESISTOR	390 1/10W
R414	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R415	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R416	QRSA08J-123	M.G.RESISTOR	12K 1/10W
R417	QRSA08J-123	M.G.RESISTOR	12K 1/10W
R418	QRSA08J-123	M.G.RESISTOR	12K 1/10W
R419	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R420	QRSA08J-0R0	M.G.RESISTOR	0 1/10W BR-S500
R422	QRSA08J-682	M.G.RESISTOR	6.8K 1/10W
R423	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R424	QRSA08J-682	M.G.RESISTOR	6.8K 1/10W
R425	QRSA08J-561	M.G.RESISTOR	560 1/10W
R426	QRSA08J-394	M.G.RESISTOR	390K 1/10W BR-S800
R427	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R428	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R429	QRSA08J-181	M.G.RESISTOR	180 1/10W
R430	QVPB609-102	TRIM.RESISTOR	1K STILL Y ADJ
C1	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C3	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C4	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C5	QETA1AM-476	E.CAPACITOR	47 10V
C6	QETA1CM-106	E.CAPACITOR	10 16V
C7	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C8	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C9	QETA1EM-475	E.CAPACITOR	4.7 25V
C10	QETA1HM-474	E.CAPACITOR	0.47 50V
C11	QEE41EM-475	E.CAPACITOR	4.7 25V BR-S800
	QEE81EM-475	E.CAPACITOR	4.7 25V BR S500
C12	QETA1HM-105	E.CAPACITOR	1.0 50V
C13	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C14	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C15	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C16	QCYA1HK-472	CER.CAPACITOR	4700P 50V
C17	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C18	QETA1CM-106	E.CAPACITOR	10 16V
C19	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C20	QETA1AM-476	E.CAPACITOR	47 10V
C21	QETA1AM-107	E.CAPACITOR	100 10V

[VIDEO 2]

Symbol No.	Part No.	Part Name	Description
C22	QCTA1CH 301	CER.CAPACITOR	300P 50V
C23	QCTA1CH-301	CER.CAPACITOR	300P 50V
C24	QCTA1CH-181	CER.CAPACITOR	180P 50V
C25	QCTA1CH-101	CER.CAPACITOR	100P 50V
C26	QCTA1CH-271	CER.CAPACITOR	270P 50V
C27	QCTA1CH-820	CER.CAPACITOR	82P 50V
C28	QCTA1CH-221	CER.CAPACITOR	220P 50V
C29	QCTA1CH-301	CER.CAPACITOR	300P 50V
C30	QCTA1CH-301	CER.CAPACITOR	300P 50V
C31	QCTA1CH-100	CER.CAPACITOR	10P 50V
C32	QETA1AM-476	E.CAPACITOR	47 10V
C33	QETA1EM-335	E.CAPACITOR	3.3 25V
C34	QETA1HM-225	E.CAPACITOR	2.2 50V
C35	QETA1HM-225	E.CAPACITOR	2.2 50V
C36	QCTA1CH-680	CER.CAPACITOR	68P 50V
C37	QETA1AM-226	E.CAPACITOR	22 10V
C38	QETA1AM-107	E.CAPACITOR	100 10V
C39	QETA1AM-476	E.CAPACITOR	47 10V
C40	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C41	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C42	QCTA1CH 101	CER.CAPACITOR	100P 50V BR-S800
C43	QCYA1EK-223	CER.CAPACITOR	0.022 25V BR S800
C44	QCYA1HK 183	CER.CAPACITOR	0.018 50V BR S800
C45	QCTA1CH 180	CER.CAPACITOR	18P 50V BR S800
C46	QCTA1CH-220	CER.CAPACITOR	22P 50V BR S800
C47	QCYA1HK-102	CER.CAPACITOR	1000P 50V BR-S800
C48	QCTA1CH-331	CER.CAPACITOR	330P 50V BR-S800
C49	QCYA1EK 223	CER.CAPACITOR	0.022 25V BR-S800
C50	QCYA1EK-223	CER.CAPACITOR	0.022 25V BR S800
C51	QCYA1EK-223	CER.CAPACITOR	0.022 25V BR-S800
C52	QCTA1CH-151	CER.CAPACITOR	150P 50V BR-S800
C53	QCTA1CH-330	CER.CAPACITOR	33P 50V BR-S800
C54	QCTA1CH-151	CER.CAPACITOR	150P 50V BR-S800
C55	QETA1CM-476	E.CAPACITOR	47 16V BR-S800
C56	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C57	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C58	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C59	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C60	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C61	QETA1AM-107	E.CAPACITOR	100 10V
C62	QCYA1HK-682	CER.CAPACITOR	6800P 50V
C63	QCTA1CH-330	CER.CAPACITOR	33P 50V
C64	QCYA1EK-473	CER.CAPACITOR	0.047 25V
C65	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C69	QETA1CM-476	E.CAPACITOR	47 16V
C70	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C71	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C72	QCYA1EK-104	CER.CAPACITOR	0.10 25V BR-S800
C73	QCTA1CH-121	CER.CAPACITOR	120P 50V BR-S800
C74	QCYA1EK-104	CER.CAPACITOR	0.10 25V BR-S800
C76	QCYA1EK-104	CER.CAPACITOR	0.10 25V BR-S800
C77	QETA1CM-476	E.CAPACITOR	47 16V BR-S800
C78	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C79	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C80	QCTA1CH-4R0	CER.CAPACITOR	4.0P 50V BR-S800
C81	QCTA2CH-181	CER.CAPACITOR	180P 50V BR-S800
C82	QETA1HM-474	E.CAPACITOR	0.47 50V
C83	QETA1HM-474	E.CAPACITOR	0.47 50V
C84	QETA1CM-226	E.CAPACITOR	22 16V
C85	QETA1CM-477	E.CAPACITOR	470 16V

Symbol No.	Part No.	Part Name	Description
C86	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C87	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C88	QETA1HM-474	E.CAPACITOR	0.47 50V
C89	QETA1HM-474	E.CAPACITOR	0.47 50V
C90	QETA1EM-475	E.CAPACITOR	4.7 25V
C91	QETA1AM 226	E.CAPACITOR	22 10V BR S800
C92	QCTA1CH-820	CER.CAPACITOR	82P 50V
C94	QETA1AM-476	E.CAPACITOR	47 10V
C95	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C96	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C97	QCTA1CH-330	CER.CAPACITOR	33P 50V
C98	QCTA1CH 6R0	CER.CAPACITOR	6.0P 50V
C99	QCTA1CH 100	CER.CAPACITOR	10P 50V
C100	QCTA1CH-150	CER.CAPACITOR	15P 50V
C101	QCTA1CH-151	CER.CAPACITOR	150P 50V
C102	QCTA1CH 471	CER.CAPACITOR	470P 50V
C103	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C104	QCYA1EK-223	CER.CAPACITOR	0.022 25V
C105	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C106	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C107	QCTA1CH 240	CER.CAPACITOR	24P 50V
C108	QCYA1EK 103	CER.CAPACITOR	0.010 25V BR-S800
C109	QCYA1EK 103	CER.CAPACITOR	0.010 25V BR-S800
C110	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C111	QCTA1CH 270	CER.CAPACITOR	27P 50V
C112	QCTA1CH-330	CER.CAPACITOR	33P 50V
C113	QCTA1CH-680	CER.CAPACITOR	68P 50V
C115	QCTA1CH 330	CER.CAPACITOR	33P 50V
C116	QCYA1EK 473	CER.CAPACITOR	0.047 25V
C117	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C118	QETA1AM 336	E.CAPACITOR	33 10V
C119	QETA1CM-106	E.CAPACITOR	10 16V
C120	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C121	QETA1AM 476	E.CAPACITOR	47 10V
C122	QETA1AM 107	E.CAPACITOR	100 10V
C123	QCTA1CH-271	CER.CAPACITOR	270P 50V
C124	QCTA1CH 330	CER.CAPACITOR	33P 50V
C125	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C127	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C128	QCTA1CH-470	CER.CAPACITOR	47P 50V
C129	QCTA1CH 390	CER.CAPACITOR	39P 50V
C130	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C131	QCTA1CH-471	CER.CAPACITOR	470P 50V
C133	QCTA1CH-820	CER.CAPACITOR	82P 50V
C134	QCTA1CH 120	CER.CAPACITOR	12P 50V
C135	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C136	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C137	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C138	QETA1CM-476	E.CAPACITOR	47 16V
C139	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C140	QCTA1CH-271	CER.CAPACITOR	270P 50V
C142	QCTA1CH 151	CER.CAPACITOR	150P 50V
C144	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C145	QCTA1CH-330	CER.CAPACITOR	33P 50V
C146	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C147	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C148	QCTA1CH 390	CER.CAPACITOR	39P 50V
C149	QCTA1CH-470	CER.CAPACITOR	47P 50V
C150	QCTA1CH-470	CER.CAPACITOR	47P 50V
C151	QCTA1CH 220	CER.CAPACITOR	22P 50V

Symbol No.	Part No.	Part Name	Description
C152	QCTA1CH-180	CER.CAPACITOR	18P 50V
C153	QCTA1CH-390	CER.CAPACITOR	39P 50V
C154	QCTA1CH-150	CER.CAPACITOR	15P 50V
C155	QCTA1CH-120	CER.CAPACITOR	12P 50V
C156	QCTA1CH-820	CER.CAPACITOR	82P 50V
C157	QENA1HM-105	NP.CAPACITOR	1.0 50V
C158	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C159	QETA1HM-105	E.CAPACITOR	1.0 50V
C160	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C161	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C162	QETA1CM 476	E.CAPACITOR	47 16V
C163	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C164	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C165	QENA1AM-107	NP.CAPACITOR	100 10V
C168	QCTA1CH-181	CER.CAPACITOR	180P 50V
C169	QENA1AM 107	NP.CAPACITOR	100 10V
C170	QETA1CM-107	E.CAPACITOR	100 16V
C171	QETA1CM-476	E.CAPACITOR	47 16V
C172	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C173	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C174	QENA1AM-107	NP.CAPACITOR	100 10V
C175	QETA1CM-107	E.CAPACITOR	100 16V
C178	QENA1AM 107	NP.CAPACITOR	100 10V
C180	QETA1CM-107	E.CAPACITOR	100 16V
C181	QCTA1CH-330	CER.CAPACITOR	33P 50V
C182	QETA1CM 107	E.CAPACITOR	100 16V
C183	QETA1HM-474	E.CAPACITOR	0.47 50V
C184	QEE41VM-105	E.CAPACITOR	1.0 35V
C185	QETA1CM-106	E.CAPACITOR	10 16V
C186	QCTA1CH 150	CER.CAPACITOR	15P 50V
C187	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C188	QETA1CM-107	E.CAPACITOR	100 16V
C189	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C190	QETA1CM-477	E.CAPACITOR	470 16V
C191	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C192	QETA1CM-107	E.CAPACITOR	100 16V BR-S800
C193	QAT3661 500	TRIM.CAPACITOR	50P REC FREQ CH BR S800
C194	QAT3661-500	TRIM.CAPACITOR	50P REC FREQ CH BR S800
C195	QETA1CM-476	E.CAPACITOR	47 16V BR-S800
C196	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C197	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
C208	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C209	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C210	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C211	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C212	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C213	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C214	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C217	QCTA1CH-120	CER.CAPACITOR	12P 50V BR S800
C218	QCTA1CH-180	CER.CAPACITOR	18P 50V
C219	QCTA1CH 560	CER.CAPACITOR	56P 50V
C221	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C222	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C225	QCTA1CH-390	CER.CAPACITOR	39P 50V
C228	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C229	QENA1AM-107	NP.CAPACITOR	100 10V
C230	QETA1CM-107	E.CAPACITOR	100 16V
C231	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C232	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C233	QETA1CM 476	E.CAPACITOR	47 16V

Symbol No.	Part No.	Part Name	Description
C237	QCTA1CH-820	CER.CAPACITOR	82P 50V
C241	QCYA1HK-102	CER.CAPACITOR	1000P 50V BR-S800
	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S500
C242	QCTA1CH-101	CER.CAPACITOR	100P 50V
C246	QCYA1EK 103	CER.CAPACITOR	0.010 25V
C248	QCTA1CH-220	CER.CAPACITOR	22P 50V
C249	QCTA1CH-121	CER.CAPACITOR	120P 50V
C250	QCYA1EK-223	CER.CAPACITOR	0.022 25V
C252	QETA1CM-107	E.CAPACITOR	100 16V
C253	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C254	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C255	QCTA1CH-120	CER.CAPACITOR	12P 50V
C256	QCYA1EK-223	CER.CAPACITOR	0.022 25V
C257	QCTA1CH-471	CER.CAPACITOR	470P 50V
C258	QCYA1EK-223	CER.CAPACITOR	0.022 25V
C259	QCYA1EK 223	CER.CAPACITOR	0.022 25V
C260	QENA1AM-476	NP.CAPACITOR	47 10V
C261	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C262	QETA1CM 476	E.CAPACITOR	47 16V
C263	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C264	QCTA1CH-220	CER.CAPACITOR	22P 50V
C265	QETA1CM-106	E.CAPACITOR	10 16V
C266	QCTA1CH-101	CER.CAPACITOR	100P 50V
C267	QCTA1CH-121	CER.CAPACITOR	120P 50V
C268	QCTA1CH-390	CER.CAPACITOR	39P 50V
C269	QCTA1CH 471	CER.CAPACITOR	470P 50V
C270	QETA1CM 476	E.CAPACITOR	47 16V
C272	QCTA1CH-471	CER.CAPACITOR	470P 50V
C273	QCTA1CH-681	CER.CAPACITOR	680P 50V
C274	QENA1HM 225	NP.CAPACITOR	2.2 50V
C275	QETA1CM-476	E.CAPACITOR	47 16V
C276	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C277	QCYA1EK 223	CER.CAPACITOR	0.022 25V
C278	QCYA1EK 223	CER.CAPACITOR	0.022 25V
C279	NEE21AM-106	TAN.CAPACITOR	10 10V
C280	QCTA1CH 101	CER.CAPACITOR	100P 50V
L2	PU48530-101	PEAKING COIL	100μH
L3	PU48530 101	PEAKING COIL	100μH
L4	PU48530 1R0	PEAKING COIL	1μH
L5	PU48530-221	PEAKING COIL	220μH BR S800
L6	PU48530-330	PEAKING COIL	33μH BR-S800
L7	PU48530-470	PEAKING COIL	47μH BR-S800
L8	PU48530 221	PEAKING COIL	220μH BR S800
L9	PU48530 821	PEAKING COIL	820μH
L10	PU48530-391	PEAKING COIL	390μH
L11	PU48530 222	PEAKING COIL	2.2mH
L12	PU48530-221	PEAKING COIL	220μH
L13	PU48530 4R7	PEAKING COIL	4.7μH BR-S800
L15	PU48530-221	PEAKING COIL	220μH BR S800
L16	PU48530 101	PEAKING COIL	100μH
L17	PU48530 1R0	PEAKING COIL	1μH
L18	PU48530-390	PEAKING COIL	39μH
L19	PU48530-180	PEAKING COIL	18μH
L20	PU48530 220	PEAKING COIL	22μH
L21	PU48530-100	PEAKING COIL	10μH
L22	PU48530-330	PEAKING COIL	33μH
L23	PU48530 270	PEAKING COIL	27μH
L25	PU48530-221	PEAKING COIL	220μH

[VIDEO 2]

Symbol No.	Part No.	Part Name	Description	
L26	YU41134 221	COIL	220μH	
L27	YU41134-390	COIL	39μH	
L28	YU41134-470	COIL	47μH	
L29	YU41134-270	COIL	27μH	
L30	SCV1880-001	TEST POINT		
L31	YU41134 220	COIL	22μH	
L32	PU48530-221	PEAKING COIL	220μH	
L33	YU41134-221	COIL	220μH	
L35	YU41134-390	COIL	39μH	
L36	YU41134-5R6	COIL	5.6μH	
L37	YU41134-100	COIL	10μH	
L38	YU41134-390	COIL	39μH	
L39	YU41134-221	COIL	220μH	
L40	YU41134-100	COIL	10μH	
L41	PU48530-221	PEAKING COIL	220μH	
L45	YU41134-150	COIL	15μH	
L46	PU48530-221	PEAKING COIL	220μH	
L47	PU48530-221	PEAKING COIL	220μH	BR-S800
L49	PU48530-101	PEAKING COIL	100μH	
L50	YU41134 470	COIL	47μH	
L51	PU48530-221	PEAKING COIL	220μH	
L54	PU48530-390	PEAKING COIL	39μH	
L55	PU48530-221	PEAKING COIL	220μH	
L56	PU48530 271	PEAKING COIL	270μH	
L57	YU41134-101	COIL	100μH	
BF1	PELN0343	BPF	BPF1	
LC1	PU60055	LPF	LPF1	
LC2	PELN0336-01-01	LPF	LPF2	
LC3	PU61057	LPF	LPF3	
LC4	PELN0409	LPF	LPF4	
LC5	PGZ02067	LPF	LPF5	
LC6	PGZ02067	LPF	LPF6	
DL1	TK16071M	I.C.(M)	TOKO	
DL2	PGZ02064	LPF		
DL3	PGZ02066	DELAY LINE		
CN1	PGZ01937-44	CONNECTOR	44PIN	
CN2	PGZ01937-44	CONNECTOR	44PIN	
CN3	PU59555-114	CONNECTOR	14PIN	
TP1	SQMX001-001	TEST POINT		
⚠K1	PGZ00627	FERRATE BEADS		
⚠K2	PGZ00627	FERRATE BEADS		
⚠K3	PGZ00627	FERRATE BEADS		
SP1	PGZ01128-02	SPACER		

Symbol No.	Part No.	Part Name	Description	
	STILL SWITCH BOARD SLK2010-01-00A			
CBM1	SCV1210-006	CONNECTOR		
IC501	MM1117XF	I.C.(M)	MITSUMI	
R501	QRSA08J 105	M.G.RESISTOR	1.0M	1/10W
R502	QRSA08J 105	M.G.RESISTOR	1.0M	1/10W
R503	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R504	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R505	QRSA08J 105	M.G.RESISTOR	1.0M	1/10W
C501	NEE21CM 225	TAN.CAPACITOR	2.2	16V
C502	NEE21CM 225	TAN.CAPACITOR	2.2	16V
C503	NEE21AM-476	TAN.CAPACITOR	47	10V
C504	NEE21AM-475	TAN.CAPACITOR	4.7	10V
C505	QCYA1EK-103	CER.CAPACITOR	0.010	25V

6.6 A/V PRE-REC BOARD ASSEMBLY LIST [1][2]

PRK20283A-01 (BR-S800)

PRK20283B-01 (BR-S500) [1][2]□□□□□□□

Symbol No.	Part No.	Part Name	Description
IC1	BA7743FS	I.C.(M)	ROHM
IC2	M5278D05	I.C.(M)	MITSUBISHI
IC101	M5278D09	I.C.(M)	MITSUBISHI
IC102	M5278L05	I.C.(M)	MITSUBISHI
IC104	TC4053BF	I.C.(M)	TOSHIBA
IC105	TC4S30F	I.C.(M)	TOSHIBA
IC106	TC7W02F	I.C.(M)	TOSHIBA
IC107	UPC2320GS	I.C.(M)	NEC
Q1	DTC323TK	TRANSISTOR	ROHM BR-S800
Q2	DTC323TK	TRANSISTOR	ROHM BR-S800
Q3	DTB123TS	TRANSISTOR	ROHM BR-S800
Q4	DTC124EK	TRANSISTOR	ROHM BR S800
Q101	2SD601A(Q)	TRANSISTOR	MATSUSHITA
Q102	2SC3110	TRANSISTOR	MATSUSHITA
Q103	2SC3110	TRANSISTOR	MATSUSHITA
Q104	2SC3110	TRANSISTOR	MATSUSHITA
Q105	2SC3110	TRANSISTOR	MATSUSHITA
Q106	2SA933S(Q)	TRANSISTOR	ROHM BR-S800
Q107	2SC1741S(QR)	TRANSISTOR	ROHM BR-S800
Q108	2SA933S(Q)	TRANSISTOR	ROHM BR-S800
Q109	2SD639R	TRANSISTOR	MATSUSHITA BR-S800
Q110	2SD639R	TRANSISTOR	MATSUSHITA BR-S800
Q111	2SD601A(Q)	TRANSISTOR	MATSUSHITA
Q112	DTC124EK	TRANSISTOR	ROHM BR-S800
D1	1SS136ᵛ	DIODE	ROHM
D2	1SS136ᵛ	DIODE	ROHM
D101	RD10ES	ZENER DIODE	NEC BR-S800
D102	RD9.1E	ZENER DIODE	NEC BR-S800
	RD9.1EW	ZENER DIODE	NEC BR S500
R1	QRSA08J-392	M.G.RESISTOR	3.9K 1/10W
R2	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R3	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R4	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R5	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R6	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R7	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R8	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R9	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R10	QRSA08J-8R2	M.G.RESISTOR	8.2 1/10W BR-S800
R11	QRSA08J-224	M.G.RESISTOR	220K 1/10W BR-S800
R12	QRSA08J-103	M.G.RESISTOR	10K 1/10W BR-S500
R14	QRSA08J-0R0	M.G.RESISTOR	0 1/10W BR-S500
R15	QRSA08J-272	M.G.RESISTOR	2.7K 1/10W BR-S800
R19	NRS016J-101	M.G.RESISTOR	100 1W BR-S800
R101	QRSA08J-221	M.G.RESISTOR	220 1/10W
R102	QRSA08J-221	M.G.RESISTOR	220 1/10W
R104	QRSA08J-221	M.G.RESISTOR	220 1/10W
R105	QRSA08J-221	M.G.RESISTOR	220 1/10W
R106	QRSA08J-221	M.G.RESISTOR	220 1/10W BR-S800
R107	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R108	QRSA08J-331	M.G.RESISTOR	330 1/10W
R109	QRSA08J-101	M.G.RESISTOR	100 1/10W
R110	QRSA08J-471	M.G.RESISTOR	470 1/10W
R111	QRSA08J-470	M.G.RESISTOR	47 1/10W
R112	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R113	QRSA08J-103	M.G.RESISTOR	10K 1/10W

Symbol No.	Part No.	Part Name	Description
R114	QRSA08J-470	M.G.RESISTOR	47 1/10W
R115	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R116	QRSA08J-680	M.G.RESISTOR	68 1/10W
R117	QRSA08J-820	M.G.RESISTOR	82 1/10W
R118	PGZ01994-601	FERRITE BEADS	
R119	PGZ01994-601	FERRITE BEADS	
R120	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R121	PGZ01994-601	FERRITE BEADS	
R122	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R123	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R124	PGZ01994-601	FERRITE BEADS	
R125	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R126	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R127	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R128	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R129	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R130	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R131	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W BR-S800
R132	QRSA08J-473	M.G.RESISTOR	47K 1/10W BR-S800
R133	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W BR-S800
R134	QRSA08J-473	M.G.RESISTOR	47K 1/10W BR-S800
R135	QRSA08J-183	M.G.RESISTOR	18K 1/10W BR-S800
R136	QRSA08J-121	M.G.RESISTOR	120 1/10W BR-S800
R137	QRSA08J-104	M.G.RESISTOR	100K 1/10W BR-S800
R138	QRSA08J-104	M.G.RESISTOR	100K 1/10W BR-S800
R139	QRSA08J-121	M.G.RESISTOR	120 1/10W BR S800
R140	QRSA08J-221	M.G.RESISTOR	220 1/10W BR-S800
R141	QRSA08J-391	M.G.RESISTOR	390 1/10W
R142	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R143	QRSA08J-121	M.G.RESISTOR	120 1/10W BR-S800
R144	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R145	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R146	QRSA08J-0R0	M.G.RESISTOR	0 1/10W BR-S500
C1	QCYA1HK-102	CER.CAPACITOR	1000P 50V BR-S800
C2	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C3	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C4	QEE41AM-107	E.CAPACITOR	100 10V
C5	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C6	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C7	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C8	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C9	QCTA1CH-561	CER.CAPACITOR	560P 50V
C10	QCTA1CH-561	CER.CAPACITOR	560P 50V
C11	QER41HM-105	E.CAPACITOR	1.0 50V
C12	QER41HM-105	E.CAPACITOR	1.0 50V
C13	QCTA1CH-101	CER.CAPACITOR	100P 50V
C14	QFN41HJ-104	MY.CAPACITOR	0.10 50V BR-S800
C15	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C16	QER41CM-476	E.CAPACITOR	47 16V
C17	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S500
C18	QCFA1CZ-224	CER.CAPACITOR	0.22 16V BR-S800
	QRSA08J-0R0	M.G.RESISTOR	0 1/10W BR-S500
C19	QCYA1HK-102	CER.CAPACITOR	1000P 50V BR S800
C101	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C102	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C103	QEE41CM-106	E.CAPACITOR	10 16V
C104	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C105	QEE41CM-106	E.CAPACITOR	10 16V

[A/V PRE-REC]

Symbol No.	Part No.	Part Name	Description
C106	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C107	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C108	QEE41CM-106	E.CAPACITOR	10 16V
C109	QEE41CM-106	E.CAPACITOR	10 16V
C110	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C112	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C113	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C114	QCYA1EK-103	CER.CAPACITOR	0.010 25V
C115	QER41CM-106	E.CAPACITOR	10 16V
C116	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C117	QCYA1EK-104	CER.CAPACITOR	0.10 25V BR-S800
C118	QCYA1EK-104	CER.CAPACITOR	0.10 25V BR-S800
C119	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C120	QEE41VM-474	E.CAPACITOR	0.47 35V
C121	QCYA1HK-222	CER.CAPACITOR	2200P 50V
C122	QCYA1HK-222	CER.CAPACITOR	2200P 50V
C123	QCTA1CH-9R0	CER.CAPACITOR	9.0P 50V
C124	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C125	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C126	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C127	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C128	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C130	QEE41VM-474	E.CAPACITOR	0.47 35V
C131	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C132	QEE41VM-474	E.CAPACITOR	0.47 35V
C133	QEE41VM-474	E.CAPACITOR	0.47 35V
C134	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C135	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C136	QEE41VM-474	E.CAPACITOR	0.47 35V
C137	QCYA1EK-103	CER.CAPACITOR	0.010 25V BR-S800
	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S500
C138	QCTA1CH-101	CER.CAPACITOR	100P 50V
C139	QCTA1CH-101	CER.CAPACITOR	100P 50V
C140	QCTA1CH-101	CER.CAPACITOR	100P 50V
C141	QCTA1CH-101	CER.CAPACITOR	100P 50V
C142	QCTA1CH-100	CER.CAPACITOR	10P 50V
C143	QCTA1CH-100	CER.CAPACITOR	10P 50V
C146	QER41CM-106	E.CAPACITOR	10 16V BR-S800
C147	QCFA1EZ-104	CER.CAPACITOR	0.10 25V BR-S800
C148	QCF11HP-103	CER.CAPACITOR	0.010 50V BR-S800
C149	QCBB1HJ-820	CER.CAPACITOR	82P 50V BR-S800
C150	QCBB1HJ-820	CER.CAPACITOR	82P 50V BR-S800
C151	QCSB1HJ-560	CER.CAPACITOR	56P 50V BR-S800
C152	QCC11EJ-123	CER.CAPACITOR	0.012 25V BR-S800
C153	QCT25UJ-181	CER.CAPACITOR	180P 50V BR-S800
C155	QCFA1EZ-104	CER.CAPACITOR	0.10 25V
C156	QCFA1EZ-104	CER.CAPACITOR	0.10 25V BR-S800
C157	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S800
C158	QCFA1EZ-104	CER.CAPACITOR	0.10 25V
C159	QCFA1EZ-104	CER.CAPACITOR	0.10 25V
C161	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C162	QETA1CM-476	E.CAPACITOR	47 16V
C171	QCTA1CH-101	CER.CAPACITOR	100P 50V BR-S800
L101	YU41134-1R0	COIL	1μH
L102	YU41134-101	COIL	100μH
L103	YU41134-101	COIL	100μH
L104	PU48530-100	PEAKING COIL	10μH
L105	YU41134-101	COIL	100μH BR-S800

Symbol No.	Part No.	Part Name	Description
L106	PU48530-560	PEAKING COIL	56μH BR-S800
L107	PU48530-3R3	PEAKING COIL	3.3μH BR-S800
CN1	PU59555-103	CONNECTOR	3PIN
CN2	PU59555-106	CONNECTOR	6PIN BR-S800
	PU59555-104	CONNECTOR	4PIN BR-S500
CN3	PU56258-14	CONNECTOR	14PIN
CN5	PU59555-110	CONNECTOR	10PIN
CN6	PU59555-114	CONNECTOR	14PIN
TP1	SQMX001-001	TEST POINT	
B1	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
B2	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
B4	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
B5	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
⚠K1	PU60281-2	FERRITE BEADS	
⚠K2	PU60281-2	FERRITE BEADS	
⚠K101	PU60281-2	FERRITE BEADS	
⚠K102	PU60281-2	FERRITE BEADS	
⚠K104	PU60281-2	FERRITE BEADS	
⚠K105	PU60281-2	FERRITE BEADS	
⚠K106	PU60281-2	FERRITE BEADS	BR-S800
⚠K107	PU60281-2	FERRITE BEADS	
⚠K108	PU60281-2	FERRITE BEADS	BR-S800
T101	PU56175	TRANSFORMER	BR-S800
SL1	PQ33493	SHIELD CASE	BR-S800
SL2	PQ33494	SHIELD COVER	BR-S800
SL3	PRS40034	SHIELD CASE	
BK1	PRD44235	BRACKET	
SP1	PGZ01128-02	SPACER	
S1	DPSP2608Z	SCREW	M2.6 x 8

6.7 FM AUDIO BOARD ASSEMBLY LIST [2][0]

PRK10171C-03 (BR-S800)

PRK10171D-03 (BR-S500) [2][0][ ][ ][ ][ ][ ][ ]

Symbol No.	Part No.	Part Name	Description
IC1	M5278D05	I.C.(M)	MITSUBISHI
IC2	JCP0038	I.C.(M)	JVC
IC3	TC4052BF	I.C.(M)	TOSHIBA
IC4	TC4052BF	I.C.(M)	TOSHIBA
IC5	M51132L	I.C.(M)	MITSUBISHI
IC6	M5218AFP	I.C.(M)	MITSUBISHI
IC7	TL082CPS	I.C.(M)	TEXAS
IC8	AN6041	I.C.(M)	MATSUSHITA BR-S800
IC9	M37451M8-521FP	I.C.(M)	MITSUBISHI
IC10	BR24C01AF	I.C.(M)	ROHM
IC11	M62353GP	I.C.(M)	MITSUBISHI
IC12	M62353GP	I.C.(M)	MITSUBISHI
IC13	TC4051BF	I.C.(M)	TOSHIBA
IC14	M5218AFP	I.C.(M)	MITSUBISHI
IC15	M5218AFP	I.C.(M)	MITSUBISHI
IC19	M5218AFP	I.C.(M)	MITSUBISHI BR-S800
IC20	BA10358F	I.C.(M)	ROHM BR-S800
Q1	2SD973AR	TRANSISTOR	MATSUSHITA
Q2	2SK208	F.E.T.	TOSHIBA
Q3	2SK208	F.E.T.	TOSHIBA
Q4	2SC2412K	TRANSISTOR	ROHM BR-S800
Q5	2SA1037K	TRANSISTOR	ROHM BR-S800
Q6	2SC2412K	TRANSISTOR	ROHM BR-S800
Q7	DTC124EK	TRANSISTOR	ROHM
Q8	DTC124EK	TRANSISTOR	ROHM
Q9	DTC124EK	TRANSISTOR	ROHM
Q10	DTC124EK	TRANSISTOR	ROHM
Q11	DTC323TK	TRANSISTOR	ROHM
Q12	DTC124EK	TRANSISTOR	ROHM
Q13	DTC124EK	TRANSISTOR	ROHM
Q14	2SC2412K(RS)	TRANSISTOR	ROHM
Q15	DTA124EK	TRANSISTOR	ROHM
Q17	DTC124EK	TRANSISTOR	ROHM BR-S800
Q18	DTA124EK	TRANSISTOR	ROHM BR-S800
Q19	DTA124EK	TRANSISTOR	ROHM BR-S800
Q20	DTC124EK	TRANSISTOR	ROHM
Q21	DTC323TK	TRANSISTOR	ROHM
Q22	DTA124EK	TRANSISTOR	ROHM
D1	DA204K	DIODE	ROHM
D2	DA204K	DIODE	ROHM
D3	DA204K	DIODE	ROHM
D4	RD5.1ES	ZENER DIODE	NEC
R1	QRSA08J-821	M.G.RESISTOR	820 1/10W
R2	QRSA08J-821	M.G.RESISTOR	820 1/10W
R3	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R4	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R7	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R8	QRSA08J-274	M.G.RESISTOR	270K 1/10W
R9	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R10	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R11	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R12	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R13	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R14	QRSA08J-303	M.G.RESISTOR	30K 1/10W
R15	QRSA08J-0R0	M.G.RESISTOR	0 1/10W

Symbol No.	Part No.	Part Name	Description
R17	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R18	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R19	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R20	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R21	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R22	QRSA08J-333	M.G.RESISTOR	33K 1/10W BR-S800
R23	QRSA08J-123	M.G.RESISTOR	12K 1/10W BR-S800
R24	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R25	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R26	QRSA08J-561	M.G.RESISTOR	560 1/10W BR-S800
R27	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R28	QRSA08J-123	M.G.RESISTOR	12K 1/10W BR-S800
R29	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W BR-S800
R30	QRSA08J-223	M.G.RESISTOR	22K 1/10W BR-S800
R31	QRSA08J-223	M.G.RESISTOR	22K 1/10W BR-S800
R32	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R37	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R38	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R39	QRSA08J-511	M.G.RESISTOR	510 1/10W
R40	QRSA08J-511	M.G.RESISTOR	510 1/10W
R41	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R42	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R43	QRSA08J-513	M.G.RESISTOR	51K 1/10W
R44	QRSA08J-513	M.G.RESISTOR	51K 1/10W
R45	QRSA08J-101	M.G.RESISTOR	100 1/10W
R46	QRSA08J-101	M.G.RESISTOR	100 1/10W
R47	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R48	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R49	QRSA08J-101	M.G.RESISTOR	100 1/10W
R50	QRSA08J-101	M.G.RESISTOR	100 1/10W
R51	QRSA08J-822	M.G.RESISTOR	8.2K 1/10W
R52	QRSA08J-822	M.G.RESISTOR	8.2K 1/10W
R53	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R54	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R55	QRSA08J-123	M.G.RESISTOR	12K 1/10W
R56	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R57	QVPC625-103	TRIM.RESISTOR	10K LCH CARRIER
R58	QVPC625-682	TRIM.RESISTOR	6.8K R CARRIER
R59	QRSA08J-683	M.G.RESISTOR	68K 1/10W
R60	QRSA08J-683	M.G.RESISTOR	68K 1/10W
R61	QRSA08J-684	M.G.RESISTOR	680K 1/10W
R62	QRSA08J-684	M.G.RESISTOR	680K 1/10W
R63	QRSA08J-684	M.G.RESISTOR	680K 1/10W
R64	QRSA08J-684	M.G.RESISTOR	680K 1/10W
R65	QRSA08J-912	M.G.RESISTOR	9.1K 1/10W BR-S800
R66	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W BR-S800
R67	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R68	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R71	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R72	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R73	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R74	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R75	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R76	QRSA08J-153	M.G.RESISTOR	15K 1/10W
R77	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R78	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R79	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R80	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R81	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W

[FM AUDIO]

Symbol No.	Part No.	Part Name	Description
R82	QRSA08J-562	M.G.RESISTOR	5.6K 1/10W
R83	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R84	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R85	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R86	QRSA08J 393	M.G.RESISTOR	39K 1/10W
R87	QRSA08J 821	M.G.RESISTOR	820 1/10W
R88	QRSA08J 821	M.G.RESISTOR	820 1/10W
R89	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R101	QRSA08J-105	M.G.RESISTOR	1.0M 1/10W
R102	QRSA08J 681	M.G.RESISTOR	680 1/10W
R103	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R105	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R106	QRSA08J 104	M.G.RESISTOR	100K 1/10W
R107	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R108	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R109	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R111	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R112	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W
R113	QRSA08J-101	M.G.RESISTOR	100 1/10W
R114	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R115	QRSA08J-101	M.G.RESISTOR	100 1/10W
R116	QRSA08J 104	M.G.RESISTOR	100K 1/10W
R117	QRSA08J-103	M.G.RESISTOR	10K 1/10W BR-S800
R118	QRSA08J 103	M.G.RESISTOR	10K 1/10W BR-S800
R119	QRSA08J-124	M.G.RESISTOR	120K 1/10W BR-S800
R120	QRSA08J-223	M.G.RESISTOR	22K 1/10W BR-S800
R121	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R122	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R123	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R124	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R125	QRSA08J 823	M.G.RESISTOR	82K 1/10W
R126	NRVA62D-563	M.F.RESISTOR	56K 1/16W
R127	NRVA62D-123	M.F.RESISTOR	12K 1/16W
R128	NRVA62D-102	M.F.RESISTOR	1.0K 1/16W
R129	NRVA62D-101	M.F.RESISTOR	100 1/16W
R131	NRVA62D-393	M.F.RESISTOR	39K 1/16W
R132	NRVA62D-393	M.F.RESISTOR	39K 1/16W
R133	NRVA62D-393	M.F.RESISTOR	39K 1/16W
R134	NRVA62D-393	M.F.RESISTOR	39K 1/16W
R135	NRVA62D-393	M.F.RESISTOR	39K 1/16W
R136	NRVA62D-393	M.F.RESISTOR	39K 1/16W
R137	NRVA62D-393	M.F.RESISTOR	39K 1/16W
R138	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R139	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R140	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R141	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R142	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R143	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R144	QRSA08J-224	M.G.RESISTOR	220K 1/10W
R145	QRSA08J-224	M.G.RESISTOR	220K 1/10W
R146	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R147	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R148	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R201	QRSA08J-223	M.G.RESISTOR	22K 1/10W BR-S800
R202	QRSA08J-683	M.G.RESISTOR	68K 1/10W BR-S800
R203	QRSA08J-273	M.G.RESISTOR	27K 1/10W BR-S800
R204	QRSA08J-223	M.G.RESISTOR	22K 1/10W BR-S800
R205	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R206	QRSA08J-823	M.G.RESISTOR	82K 1/10W

Symbol No.	Part No.	Part Name	Description
R207	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R208	QRSA08J 152	M.G.RESISTOR	1.5K 1/10W
R209	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R211	QRSA08J-101	M.G.RESISTOR	100 1/10W
R212	QRSA08J-101	M.G.RESISTOR	100 1/10W
R213	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W BR-S800
R214	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W BR S800
R215	NRVA62D-392	M.F.RESISTOR	3.9K 1/16W
R216	NRVA62D-391	M.F.RESISTOR	390 1/16W
R219	QRSA08J-221	M.G.RESISTOR	220 1/10W BR S800
R220	QRSA08J-221	M.G.RESISTOR	220 1/10W BR S800
R221	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
R222	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W BR-S800
C1	QETA1CM-107	E.CAPACITOR	100 16V
C2	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C3	QETA1CM 107	E.CAPACITOR	100 16V
C4	QETA1CM-476	E.CAPACITOR	47 16V
C5	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C6	QETA1CM-476	E.CAPACITOR	47 16V
C7	QCYA1HK 103	CER.CAPACITOR	0.010 50V
C8	QETA1CM-476	E.CAPACITOR	47 16V
C9	QETA1CM-476	E.CAPACITOR	47 16V
C11	QETA1CM-476	E.CAPACITOR	47 16V
C12	QETA0JM 107	E.CAPACITOR	100 6.3V
C13	QETA0JM-107	E.CAPACITOR	100 6.3V
C14	QETA1CM-107	E.CAPACITOR	100 16V
C15	QCYA1HK 103	CER.CAPACITOR	0.010 50V
C16	QCYA1HK-473	CER.CAPACITOR	0.047 50V
C17	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C18	QETA1HM-104	E.CAPACITOR	0.10 50V
C19	QCTA1CH-471	CER.CAPACITOR	470P 50V
C20	QCTA1CH-561	CER.CAPACITOR	560P 50V
C21	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C22	QETA1CM-476	E.CAPACITOR	47 16V
C23	QCSA1HJ-101	CER.CAPACITOR	100P 50V
C24	QCSA1HJ-101	CER.CAPACITOR	100P 50V
C25	QETA1CM-476	E.CAPACITOR	47 16V BR-S800
C26	QCTA1CH-101	CER.CAPACITOR	100P 50V BR S800
C27	QCYA1HK-223	CER.CAPACITOR	0.022 50V BR-S800
C28	QCTA1CH-121	CER.CAPACITOR	120P 50V BR S800
C29	QETA1CM-476	E.CAPACITOR	47 16V BR-S800
C30	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR S800
C31	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S800
C32	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S800
C33	QCYA1HK 103	CER.CAPACITOR	0.010 50V BR S800
C35	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C36	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C37	QETA1CM-336	E.CAPACITOR	33 16V
C38	QETA1CM-336	E.CAPACITOR	33 16V
C39	QFN41HJ-473	MY.CAPACITOR	0.047 50V
C40	QFN41HJ-473	MY.CAPACITOR	0.047 50V
C41	QETA1HM-225	E.CAPACITOR	2.2 50V
C42	QETA1HM-225	E.CAPACITOR	2.2 50V
C43	QFN41HJ-333	MY.CAPACITOR	0.033 50V
C44	QFN41HJ-333	MY.CAPACITOR	0.033 50V
C45	QETA1CM-106	E.CAPACITOR	10 16V
C46	QETA1CM-106	E.CAPACITOR	10 16V
C47	QETA1CM-227	E.CAPACITOR	220 16V

Symbol No.	Part No.	Part Name	Description
C48	QETA1CM-227	E.CAPACITOR	220 16V
C49	QETA1HM-225	E.CAPACITOR	2.2 50V
C50	QETA1HM-225	E.CAPACITOR	2.2 50V
C51	QFN41HJ-103	MY.CAPACITOR	0.010 50V
C52	QFN41HJ-103	MY.CAPACITOR	0.010 50V
C53	QETA1CM-107	E.CAPACITOR	100 16V
C54	QETA1CM-107	E.CAPACITOR	100 16V
C55	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C56	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C57	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C58	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C59	QFN41HJ-822	MY.CAPACITOR	8200P 50V
C60	QFN41HJ-822	MY.CAPACITOR	8200P 50V
C61	QFN41HJ-104	MY.CAPACITOR	0.10 50V
C62	QFN41HJ-104	MY.CAPACITOR	0.10 50V
C63	QFN41HJ-223	MY.CAPACITOR	0.022 50V
C64	QFN41HJ-223	MY.CAPACITOR	0.022 50V
C65	QCTA1CH-821	CER.CAPACITOR	820P 50V
C66	QCTA1CH-821	CER.CAPACITOR	820P 50V
C67	QFN41HJ-392	MY.CAPACITOR	3900P 50V
C68	QFN41HJ-392	MY.CAPACITOR	3900P 50V
C69	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C70	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C71	QETA1CM-476	E.CAPACITOR	47 16V
C72	QETA1EM-475	E.CAPACITOR	4.7 25V
C73	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C74	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C75	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C76	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C77	QENA1CM-106	NP.CAPACITOR	10 16V
C78	QENA1CM-106	NP.CAPACITOR	10 16V
C79	QENA1CM-106	NP.CAPACITOR	10 16V
C80	QENA1CM-106	NP.CAPACITOR	10 16V
C81	QETA1CM-476	E.CAPACITOR	47 16V
C82	QETA1CM-226	E.CAPACITOR	22 16V
C83	QETA1EM-475	E.CAPACITOR	4.7 25V
C84	QETA1CM-476	E.CAPACITOR	47 16V
C85	QETA1CM-476	E.CAPACITOR	47 16V
C86	QETA1CM-476	E.CAPACITOR	47 16V
C87	QENA1CM-106	NP.CAPACITOR	10 16V
C88	QENA1CM-106	NP.CAPACITOR	10 16V
C89	QCYA1HK-222	CER.CAPACITOR	2200P 50V BR-S800
C90	QCYA1HK-222	CER.CAPACITOR	2200P 50V BR-S800
C91	QCYA1HK-222	CER.CAPACITOR	2200P 50V BR-S800
C92	QCYA1HK-222	CER.CAPACITOR	2200P 50V BR-S800
C93	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S800
C94	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S800
C95	QENA1CM-106	NP.CAPACITOR	10 16V
C96	QENA1CM-106	NP.CAPACITOR	10 16V
C97	QETA1CM-106	E.CAPACITOR	10 16V
C98	QETA1CM-106	E.CAPACITOR	10 16V
C101	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C102	QCTA1CH-470	CER.CAPACITOR	47P 50V
C103	QCTA1CH-270	CER.CAPACITOR	27P 50V
C104	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C105	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C106	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C107	QETA1CM-476	E.CAPACITOR	47 16V
C108	QCYA1EK-104	CER.CAPACITOR	0.10 25V

Symbol No.	Part No.	Part Name	Description
C109	QETA1CM-226	E.CAPACITOR	22 16V BR-S800
C110	QCTA1CH-221	CER.CAPACITOR	220P 50V BR-S800
C111	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S800
C114	QETA1CM-476	E.CAPACITOR	47 16V
C115	QENA1CM-106	NP.CAPACITOR	10 16V
C116	QETA1CM-476	E.CAPACITOR	47 16V
C117	QENA1CM-106	NP.CAPACITOR	10 16V
C119	QETA1CM-106	E.CAPACITOR	10 16V
C120	QETA1CM-476	E.CAPACITOR	47 16V
C121	QCTA1CH-100	CER.CAPACITOR	10P 50V
C122	QETA1CM-106	E.CAPACITOR	10 16V
C123	QETA1CM-476	E.CAPACITOR	47 16V
C124	QETA1CM-476	E.CAPACITOR	47 16V
C125	QCFA1CZ-224	CER.CAPACITOR	0.22 16V
C126	QCFA1CZ-224	CER.CAPACITOR	0.22 16V
C127	QCFA1CZ-224	CER.CAPACITOR	0.22 16V
C129	QETA1CM-476	E.CAPACITOR	47 16V
C130	QETA1CM-476	E.CAPACITOR	47 16V
C131	QETA1CM-476	E.CAPACITOR	47 16V
C133	QETA1CM-476	E.CAPACITOR	47 16V
C134	QETA1CM-476	E.CAPACITOR	47 16V
C135	QCYA1HK-272	CER.CAPACITOR	2700P 50V
C136	QETA1CM-106	E.CAPACITOR	10 16V
C137	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C138	QETA1CM-476	E.CAPACITOR	47 16V BR-S800
C168	QETA1CM-476	E.CAPACITOR	47 16V
C169	QETA1CM-476	E.CAPACITOR	47 16V
C201	QETA1CM-106	E.CAPACITOR	10 16V
C202	QETA1CM-106	E.CAPACITOR	10 16V
L1	PU30284-1R	CHOKE COIL	1μH
L2	PU30284-1R	CHOKE COIL	1μH
L3	PU48530-331	PEAKING COIL	330μH
L5	PU48530-331	PEAKING COIL	330μH
L6	PU48530-331	PEAKING COIL	330μH
LC1	PU60396	BPF	1.3MHz
LC2	PU60397	BPF	1.7MHz
⚠ X1	PEVB0335	CRYSTAL	
CN1	PGZ01937-44	CONNECTOR	44PIN
CN2	PU59555-6	CONNECTOR	6PIN BR-S800
	PU59555-4	CONNECTOR	4PIN BR-S500
CN3	PU59973-18	CONNECTOR	18PIN BR-S800
CN4	PU59973-30	CONNECTOR	30PIN
CN5	PU59973-30	CONNECTOR	30PIN
TP1	SQMX001-001	TEST POINT	
DA1	DA204K	DIODE	ROHM
CL1	PGZ01978	MINI CLAMP	
HD1	PU60521	BOARD HOLDER	
HD2	PU60522	BOARD HOLDER	
SP1	PGZ01128-02	SPACER	

6.8 NORMAL AUDIO(BR-S800) BOARD ASSEMBLY LIST [2][1]

PRK20274B-02 [2][1]□□□□□□

Symbol No.	Part No.	Part Name	Description
IC1	BA7765AS	I.C.(M)	ROHM
IC1	XRA7765AS	I.C.(M)	EXAR
IC2	BA7765AS	I.C.(M)	ROHM
IC2	XRA7765AS	I.C.(M)	EXAR
IC3	CXA1101P	I.C.(M)	SONY
IC4	CXA1101P	I.C.(M)	SONY
IC5	M5218AP	I.C.(M)	MITSUBISHI
IC6	M5218AP	I.C.(M)	MITSUBISHI
IC7	M51132L	I.C.(M)	MITSUBISHI
IC8	M51132L	I.C.(M)	MITSUBISHI
IC9	M51132L	I.C.(M)	MITSUBISHI
IC10	M51132L	I.C.(M)	MITSUBISHI
IC11	TC4053BP	I.C.(M)	TOSHIBA
IC201	NJM4560D	I.C.(M)	JRC
IC202	M5218AP	I.C.(M)	MITSUBISHI
IC301	TC4066BP	I.C.(M)	TOSHIBA
IC302	M5218AP	I.C.(M)	MITSUBISHI
IC303	M5218AP	I.C.(M)	MITSUBISHI
IC304	UPC393C	I.C.(M)	NEC
IC305	M5278L09	I.C.(M)	MITSUBISHI
Q1	2SD973R	TRANSISTOR	MATSUSHITA
Q2	DTC124EK	TRANSISTOR	ROHM
Q3	DTC124EK	TRANSISTOR	ROHM
Q4	DTC124EK	TRANSISTOR	ROHM
Q5	2SC2412K	TRANSISTOR	ROHM
Q6	DTC124EK	TRANSISTOR	ROHM
Q7	DTC124EK	TRANSISTOR	ROHM
Q8	DTC124EK	TRANSISTOR	ROHM
Q9	DTA124EK	TRANSISTOR	ROHM
Q10	DTA124EK	TRANSISTOR	ROHM
Q11	DTC323TK	TRANSISTOR	ROHM
Q12	DTC323TK	TRANSISTOR	ROHM
Q13	DTC323TK	TRANSISTOR	ROHM
Q14	DTC323TK	TRANSISTOR	ROHM
Q15	DTC124EK	TRANSISTOR	ROHM
Q16	DTC124EK	TRANSISTOR	ROHM
Q17	DTA124EK	TRANSISTOR	ROHM
Q18	DTA124EK	TRANSISTOR	ROHM
Q19	DTC323TK	TRANSISTOR	ROHM
Q20	DTC323TK	TRANSISTOR	ROHM
Q21	DTC323TK	TRANSISTOR	ROHM
Q22	DTC323TK	TRANSISTOR	ROHM
Q201	2SD638RS	TRANSISTOR	MATSUSHITA
Q202	2SD638RS	TRANSISTOR	MATSUSHITA
Q203	2SA1037K	TRANSISTOR	ROHM
Q204	2SA1037K	TRANSISTOR	ROHM
Q205	2SC2412K	TRANSISTOR	ROHM
Q206	2SC2412K	TRANSISTOR	ROHM
Q207	2SC2412K	TRANSISTOR	ROHM
Q208	2SC2412K	TRANSISTOR	ROHM
Q213	2SA1037K	TRANSISTOR	ROHM
Q214	2SA1037K	TRANSISTOR	ROHM
Q215	2SB643RS	TRANSISTOR	MATSUSHITA
Q216	2SB643RS	TRANSISTOR	MATSUSHITA
Q217	2SC2412K	TRANSISTOR	ROHM
Q218	2SC2412K	TRANSISTOR	ROHM
Q219	2SD638RS	TRANSISTOR	MATSUSHITA
Q220	2SD638RS	TRANSISTOR	MATSUSHITA
Q221	2SC2412K	TRANSISTOR	ROHM

Symbol No.	Part No.	Part Name	Description
Q222	2SC2412K	TRANSISTOR	ROHM
Q223	2SC2412K	TRANSISTOR	ROHM
Q224	2SC2412K	TRANSISTOR	ROHM
Q225	2SC2412K	TRANSISTOR	ROHM
Q226	2SC2412K	TRANSISTOR	ROHM
Q227	2SC2412K	TRANSISTOR	ROHM
Q228	2SC2412K	TRANSISTOR	ROHM
Q229	DTA124EK	TRANSISTOR	ROHM
Q230	DTA124EK	TRANSISTOR	ROHM
Q231	DTC124EK	TRANSISTOR	ROHM
Q232	DTC124EK	TRANSISTOR	ROHM
Q233	2SC2412K	TRANSISTOR	ROHM
Q234	2SC2412K	TRANSISTOR	ROHM
Q302	DTA124EK	TRANSISTOR	ROHM
Q303	DTC323TK	TRANSISTOR	ROHM
Q305	DTA124EK	TRANSISTOR	ROHM
Q306	DTC323TK	TRANSISTOR	ROHM
Q307	2SC2412K	TRANSISTOR	ROHM
Q308	2SK1062	F.E.T.	TOSHIBA
D1	ERA15 02	DIODE	KYODO DENKI
D201	RD4.7ES	Z.DOIDE	NEC
D202	RD4.7ES	Z.DOIDE	NEC
R1	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R2	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R3	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R4	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R5	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R6	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R7	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R9	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R10	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R11	QRSA08J-124	M.G.RESISTOR	120K 1/10W
R12	QRSA08J-124	M.G.RESISTOR	120K 1/10W
R13	QRSA08J-432	M.G.RESISTOR	4.3K 1/10W
R14	QRSA08J-432	M.G.RESISTOR	4.3K 1/10W
R15	QRSA08J-101	M.G.RESISTOR	100 1/10W
R16	QRSA08J-101	M.G.RESISTOR	100 1/10W
R17	QRSA08J-124	M.G.RESISTOR	120K 1/10W
R18	QRSA08J-124	M.G.RESISTOR	120K 1/10W
R19	QRSA08J-821	M.G.RESISTOR	820 1/10W
R20	QRSA08J-821	M.G.RESISTOR	820 1/10W
R21	QRSA08J-822	M.G.RESISTOR	8.2K 1/10W
R22	QRSA08J-822	M.G.RESISTOR	8.2K 1/10W
R23	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R24	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R25	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R26	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R27	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R28	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R29	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R30	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R31	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R32	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R33	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R34	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R35	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W

Symbol No.	Part No.	Part Name	Description	
R36	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R37	QRSA08J-563	M.G.RESISTOR	56K	1/10W
R38	QRSA08J-563	M.G.RESISTOR	56K	1/10W
R39	QRSA08J-562	M.G.RESISTOR	5.6K	1/10W
R40	QRSA08J 562	M.G.RESISTOR	5.6K	1/10W
R41	QRSA08J-183	M.G.RESISTOR	18K	1/10W
R42	QRSA08J 183	M.G.RESISTOR	18K	1/10W
R43	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R44	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R45	QRSA08J 222	M.G.RESISTOR	2.2K	1/10W
R46	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R47	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R48	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R49	QRSA08J-105	M.G.RESISTOR	1.0M	1/10W
R50	QRSA08J 105	M.G.RESISTOR	1.0M	1/10W
R51	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R52	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R53	QRSA08J 333	M.G.RESISTOR	33K	1/10W
R54	QRSA08J-333	M.G.RESISTOR	33K	1/10W
R55	QRSA08J-562	M.G.RESISTOR	5.6K	1/10W
R56	QRSA08J-562	M.G.RESISTOR	5.6K	1/10W
R57	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R58	QRSA08J 473	M.G.RESISTOR	47K	1/10W
R59	QRSA08J 202	M.G.RESISTOR	2.0K	1/10W
R60	QRSA08J 202	M.G.RESISTOR	2.0K	1/10W
R61	QRSA08J 121	M.G.RESISTOR	120	1/10W
R62	QRSA08J 121	M.G.RESISTOR	120	1/10W
R63	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R64	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R65	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R66	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R67	QRSA08J-105	M.G.RESISTOR	1.0M	1/10W
R68	QRSA08J 105	M.G.RESISTOR	1.0M	1/10W
R71	QRSA08J-392	M.G.RESISTOR	3.9K	1/10W
R72	QRSA08J-392	M.G.RESISTOR	3.9K	1/10W
R73	QRSA08J-331	M.G.RESISTOR	330	1/10W
R74	QRSA08J-331	M.G.RESISTOR	330	1/10W
R75	QRSA08J-392	M.G.RESISTOR	3.9K	1/10W
R76	QRSA08J 392	M.G.RESISTOR	3.9K	1/10W
R77	QRSA08J 331	M.G.RESISTOR	330	1/10W
R78	QRSA08J-331	M.G.RESISTOR	330	1/10W
R79	QRSA08J-433	M.G.RESISTOR	43K	1/10W
R80	QRSA08J-433	M.G.RESISTOR	43K	1/10W
R81	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W
R82	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W
R83	QRSA08J-224	M.G.RESISTOR	220K	1/10W
R84	QRSA08J-224	M.G.RESISTOR	220K	1/10W
R85	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R86	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R87	QRSA08J-564	M.G.RESISTOR	560K	1/10W
R88	QRSA08J-564	M.G.RESISTOR	560K	1/10W
R89	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R90	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R91	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R92	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R93	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R94	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R99	QRSA08J-272	M.G.RESISTOR	2.7K	1/10W
R100	QRSA08J-272	M.G.RESISTOR	2.7K	1/10W

Symbol No.	Part No.	Part Name	Description	
R101	QRSA08J-123	M.G.RESISTOR	12K	1/10W
R102	QRSA08J 123	M.G.RESISTOR	12K	1/10W
R103	QRSA08J-562	M.G.RESISTOR	5.6K	1/10W
R104	QRSA08J-562	M.G.RESISTOR	5.6K	1/10W
R105	QRSA08J 183	M.G.RESISTOR	18K	1/10W
R106	QRSA08J 183	M.G.RESISTOR	18K	1/10W
R107	QRSA08J-271	M.G.RESISTOR	270	1/10W
R108	QRSA08J 271	M.G.RESISTOR	270	1/10W
R109	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R110	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R111	QRSA08J-202	M.G.RESISTOR	2.0K	1/10W
R112	QRSA08J 202	M.G.RESISTOR	2.0K	1/10W
R115	QRSA08J-183	M.G.RESISTOR	18K	1/10W
R116	QRSA08J-183	M.G.RESISTOR	18K	1/10W
R117	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R118	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R119	QRSA08J 223	M.G.RESISTOR	22K	1/10W
R121	QRSA08J-153	M.G.RESISTOR	15K	1/10W
R122	QRSA08J 153	M.G.RESISTOR	15K	1/10W
R123	QRSA08J 821	M.G.RESISTOR	820	1/10W
R124	QRSA08J-821	M.G.RESISTOR	820	1/10W
R126	QRSA08J 472	M.G.RESISTOR	4.7K	1/10W
R127	QRSA08J 822	M.G.RESISTOR	8.2K	1/10W
R128	QRSA08J 822	M.G.RESISTOR	8.2K	1/10W
R201	QRSA08J-681	M.G.RESISTOR	680	1/10W
R202	QRSA08J-681	M.G.RESISTOR	680	1/10W
R203	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W
R204	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W
R205	QRSA08J-332	M.G.RESISTOR	3.3K	1/10W
R206	QRSA08J 332	M.G.RESISTOR	3.3K	1/10W
R207	QRSA08J-393	M.G.RESISTOR	39K	1/10W
R208	QRSA08J-393	M.G.RESISTOR	39K	1/10W
R209	QRSA08J-182	M.G.RESISTOR	1.8K	1/10W
R210	QRSA08J 182	M.G.RESISTOR	1.8K	1/10W
R213	QRZ0054-180	FUSI.RESISTOR	18	
R214	QRZ0054-180	FUSI.RESISTOR	18	
R215	QRSA08J 221	M.G.RESISTOR	220	1/10W
R216	QRSA08J 221	M.G.RESISTOR	220	1/10W
R217	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W
R218	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W
R219	QRSA08J 392	M.G.RESISTOR	3.9K	1/10W
R220	QRSA08J-392	M.G.RESISTOR	3.9K	1/10W
R221	QRSA08J-123	M.G.RESISTOR	12K	1/10W
R222	QRSA08J 123	M.G.RESISTOR	12K	1/10W
R223	QRSA08J 473	M.G.RESISTOR	47K	1/10W
R224	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R225	QRSA08J 473	M.G.RESISTOR	47K	1/10W
R226	QRSA08J 473	M.G.RESISTOR	47K	1/10W
R227	QRSA08J 221	M.G.RESISTOR	220	1/10W
R228	QRSA08J-221	M.G.RESISTOR	220	1/10W
R229	QRSA08J-221	M.G.RESISTOR	220	1/10W
R230	QRSA08J 221	M.G.RESISTOR	220	1/10W
R231	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R232	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R233	QRSA08J 222	M.G.RESISTOR	2.2K	1/10W
R234	QRSA08J 222	M.G.RESISTOR	2.2K	1/10W
R235	QRD161J-1R0	C.RESISTOR	1.0	1/6W
R236	QRD161J-1R0	C.RESISTOR	1.0	1/6W
R237	QRD161J-1R0	C.RESISTOR	1.0	1/6W

{NORMAL AUDIO (BR-S800)}

Symbol No.	Part No.	Part Name	Description	
R238	QRD161J 1R0	C.RESISTOR	1.0	1/6W
R239	QRZ0054-120	FUSI.RESISTOR	12	
R240	QRZ0054-120	FUSI.RESISTOR	12	
R245	QRSA08J 222	M.G.RESISTOR	2.2K	1/10W
R246	QRSA08J 222	M.G.RESISTOR	2.2K	1/10W
R247	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R248	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R249	QRSA08J-2R2	M.G.RESISTOR	2.2	1/10W
R250	QRSA08J 2R2	M.G.RESISTOR	2.2	1/10W
R251	QRSA08J 824	M.G.RESISTOR	820K	1/10W
R252	NRVA62D-822	M.F.RESISTOR	8.2K	1/16W
R253	NRVA62D 103	M.F.RESISTOR	10K	1/16W
R254	NRVA62D-822	M.F.RESISTOR	8.2K	1/16W
R255	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R256	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R257	QRSA08J 153	M.G.RESISTOR	15K	1/10W
R258	QRSA08J-153	M.G.RESISTOR	15K	1/10W
R259	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R260	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R262	QRSA08J-273	M.G.RESISTOR	27K	1/10W
R263	QRSA08J-273	M.G.RESISTOR	27K	1/10W
R264	QRSA08J 123	M.G.RESISTOR	12K	1/10W
R265	QRSA08J 123	M.G.RESISTOR	12K	1/10W
R267	QRSA08J-2R2	M.G.RESISTOR	2.2	1/10W
R268	QRSA08J-2R2	M.G.RESISTOR	2.2	1/10W
R269	QRSA08J 273	M.G.RESISTOR	27K	1/10W
R270	QRSA08J 273	M.G.RESISTOR	27K	1/10W
R271	QRSA08J-392	M.G.RESISTOR	3.9K	1/10W
R272	QRSA08J-392	M.G.RESISTOR	3.9K	1/10W
R273	QRSA08J 561	M.G.RESISTOR	560	1/10W
R274	QRSA08J-561	M.G.RESISTOR	560	1/10W
R275	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W
R276	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W
R277	QRSA08J 563	M.G.RESISTOR	56K	1/10W
R278	QRSA08J-563	M.G.RESISTOR	56K	1/10W
R279	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W
R280	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W
R281	QRSA08J 2R2	M.G.RESISTOR	2.2	1/10W
R282	QRSA08J-2R2	M.G.RESISTOR	2.2	1/10W
R283	QRSA08J-181	M.G.RESISTOR	180	1/10W
R284	QRSA08J 181	M.G.RESISTOR	180	1/10W
R285	QRSA08J-2R2	M.G.RESISTOR	2.2	1/10W
R286	QRSA08J-2R2	M.G.RESISTOR	2.2	1/10W
R287	QRSA08J-272	M.G.RESISTOR	2.7K	1/10W
R288	QRSA08J-272	M.G.RESISTOR	2.7K	1/10W
R289	QRSA08J-563	M.G.RESISTOR	56K	1/10W
R290	QRSA08J-563	M.G.RESISTOR	56K	1/10W
R291	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W
R292	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W
R301	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R302	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R303	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R304	QRSA08J-184	M.G.RESISTOR	180K	1/10W
R305	QRSA08J 563	M.G.RESISTOR	56K	1/10W
R306	QRSA08J-333	M.G.RESISTOR	33K	1/10W
R307	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W
R308	QRSA08J-685	M.G.RESISTOR	6.8M	1/10W
R309	QRSA08J-101	M.G.RESISTOR	100	1/10W
R310	QRSA08J-103	M.G.RESISTOR	10K	1/10W

Symbol No.	Part No.	Part Name	Description	
R311	QRSA08J 331	M.G.RESISTOR	330	1/10W
R312	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R315	NRVA62D-823	M.F.RESISTOR	82K	1/16W
R316	QRSA08J-182	M.G.RESISTOR	1.8K	1/10W
R317	QRSA08J 472	M.G.RESISTOR	4.7K	1/10W
R318	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R319	QRSA08J 184	M.G.RESISTOR	180K	1/10W
R320	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R321	QRSA08J 105	M.G.RESISTOR	1.0M	1/10W
R322	QRSA08J-474	M.G.RESISTOR	470K	1/10W
R323	QRSA08J-474	M.G.RESISTOR	470K	1/10W
R324	QRSA08J 823	M.G.RESISTOR	82K	1/10W
R325	QRSA08J 823	M.G.RESISTOR	82K	1/10W
R326	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R327	QRSA08J-474	M.G.RESISTOR	470K	1/10W
R328	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R329	QRSA08J 104	M.G.RESISTOR	100K	1/10W
R330	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R331	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R332	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R333	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R334	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R335	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R336	QRSA08J 561	M.G.RESISTOR	560	1/10W
R337	QRSA08J-750	M.G.RESISTOR	75	1/10W
R338	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R339	QRSA08J 473	M.G.RESISTOR	47K	1/10W
R341	QRSA08J 104	M.G.RESISTOR	100K	1/10W
R342	QRSA08J 473	M.G.RESISTOR	47K	1/10W
R343	QRSA08J 153	M.G.RESISTOR	15K	1/10W
R344	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R345	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
C1	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C2	QETA1CM-107	E.CAPACITOR	100	16V
C3	QETA1CM-107	E.CAPACITOR	100	16V
C4	QETA1CM 107	E.CAPACITOR	100	16V
C5	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C6	QETA1CM-476	E.CAPACITOR	47	16V
C7	QENA1CM-106	NP.CAPACITOR	10	16V
C9	QENA1CM 106	NP.CAPACITOR	10	16V
C10	QENA1CM-106	NP.CAPACITOR	10	16V
C11	QCTA1CH-821	CER.CAPACITOR	820P	50V
C12	QCTA1CH 821	CER.CAPACITOR	820P	50V
C13	QEBA1EM-475	E.CAPACITOR	4.7	25V
C14	QEBA1EM-475	E.CAPACITOR	4.7	25V
C15	QFN41HJ-273	MY.CAPACITOR	0.027	50V
C16	QFN41HJ 273	MY.CAPACITOR	0.027	50V
C17	QCTA1CH-101	CER.CAPACITOR	100P	50V
C18	QCTA1CH-101	CER.CAPACITOR	100P	50V
C19	QETA1CM-107	E.CAPACITOR	100	16V
C20	QETA1CM 107	E.CAPACITOR	100	16V
C21	QETA1CM-476	E.CAPACITOR	47	16V
C22	QETA1CM-476	E.CAPACITOR	47	16V
C23	QCTA1CH 681	CER.CAPACITOR	680P	50V
C24	QCTA1CH-681	CER.CAPACITOR	680P	50V
C25	QCTA1CH-150	CER.CAPACITOR	15P	50V
C26	QCTA1CH 150	CER.CAPACITOR	15P	50V
C27	QENA1CM-106	NP.CAPACITOR	10	16V

Symbol No.	Part No.	Part Name	Description	
C28	QENA1CM 106	NP.CAPACITOR	10	16V
C29	QETA1CM-476	E.CAPACITOR	47	16V
C30	QETA1CM-476	E.CAPACITOR	47	16V
C31	QETA1CM-226	E.CAPACITOR	22	16V
C32	QETA1CM-226	E.CAPACITOR	22	16V
C33	QETA1EM-475	E.CAPACITOR	4.7	25V
C34	QETA1EM 475	E.CAPACITOR	4.7	25V
C35	QFN41HJ-682	MY.CAPACITOR	6800P	50V
C36	QFN41HJ-682	MY.CAPACITOR	6800P	50V
C37	QENA1CM-106	NP.CAPACITOR	10	16V
C38	QENA1CM-106	NP.CAPACITOR	10	16V
C39	QCTA1CH-101	CER.CAPACITOR	100P	50V
C40	QCTA1CH 101	CER.CAPACITOR	100P	50V
C41	QCTA1CH-101	CER.CAPACITOR	100P	50V
C42	QCTA1CH 101	CER.CAPACITOR	100P	50V
C43	QETA1CM 226	E.CAPACITOR	22	16V
C44	QETA1CM 226	E.CAPACITOR	22	16V
C45	QETA1CM-226	E.CAPACITOR	22	16V
C46	QETA1CM-226	E.CAPACITOR	22	16V
C47	QENA1CM 106	NP.CAPACITOR	10	16V
C48	QENA1CM 106	NP.CAPACITOR	10	16V
C49	QFN41HJ-393	MY.CAPACITOR	0.039	50V
C50	QFN41HJ 393	MY.CAPACITOR	0.039	50V
C51	QFN41HJ 273	MY.CAPACITOR	0.027	50V
C52	QFN41HJ-273	MY.CAPACITOR	0.027	50V
C53	QETA1CM-476	E.CAPACITOR	47	16V
C54	QETA1CM 476	E.CAPACITOR	47	16V
C55	QETA1HM-475	E.CAPACITOR	4.7	50V
C56	QETA1HM-475	E.CAPACITOR	4.7	50V
C57	QFN41HJ 473	MY.CAPACITOR	0.047	50V
C58	QFN41HJ 473	MY.CAPACITOR	0.047	50V
C59	QETA1CM-476	E.CAPACITOR	47	16V
C60	QETA1CM-476	E.CAPACITOR	47	16V
C61	QETA1CM 336	E.CAPACITOR	33	16V
C62	QETA1CM-336	E.CAPACITOR	33	16V
C63	QETA1CM-106	E.CAPACITOR	10	16V
C64	QETA1CM 106	E.CAPACITOR	10	16V
C65	QFN41HJ 822	MY.CAPACITOR	8200P	50V
C66	QFN41HJ-822	MY.CAPACITOR	8200P	50V
C67	QFN41HJ-103	MY.CAPACITOR	0.010	50V
C68	QFN41HJ-103	MY.CAPACITOR	0.010	50V
C69	QETA1HM 105	E.CAPACITOR	1.0	50V
C70	QETA1HM-105	E.CAPACITOR	1.0	50V
C71	QETA1CM-107	E.CAPACITOR	100	16V
C72	QETA1CM 107	E.CAPACITOR	100	16V
C73	QETA1HM-105	E.CAPACITOR	1.0	50V
C74	QETA1HM-105	E.CAPACITOR	1.0	50V
C75	QETA1CM 107	E.CAPACITOR	100	16V
C76	QETA1CM 107	E.CAPACITOR	100	16V
C77	QETA1CM 106	E.CAPACITOR	10	16V
C78	QETA1CM-106	E.CAPACITOR	10	16V
C79	NEE21VM-684	TAN.CAPACITOR	0.68	35V
C80	NEE21VM 684	TAN.CAPACITOR	0.68	35V
C81	QENA1CM-106	NP.CAPACITOR	10	16V
C82	QENA1CM-106	NP.CAPACITOR	10	16V
C83	QETA1CM 476	E.CAPACITOR	47	16V
C84	QETA1CM 476	E.CAPACITOR	47	16V
C85	QETA1CM-226	E.CAPACITOR	22	16V
C86	QETA1CM-226	E.CAPACITOR	22	16V

Symbol No.	Part No.	Part Name	Description	
C87	QETA1EM-475	E.CAPACITOR	4.7	25V
C88	QETA1EM 475	E.CAPACITOR	4.7	25V
C89	QENA1CM-106	NP.CAPACITOR	10	16V
C90	QENA1CM-106	NP.CAPACITOR	10	16V
C91	QCTA1CH-101	CER.CAPACITOR	100P	50V
C92	QCTA1CH 101	CER.CAPACITOR	100P	50V
C95	QETA1HM-224	E.CAPACITOR	0.22	50V
C96	QETA1HM-224	E.CAPACITOR	0.22	50V
C97	QFN41HJ 123	MY.CAPACITOR	0.012	50V
C98	QFN41HJ 123	MY.CAPACITOR	0.012	50V
C99	QFN41HJ 273	MY.CAPACITOR	0.027	50V
C100	QFN41HJ 273	MY.CAPACITOR	0.027	50V
C101	QENA1CM-106	NP.CAPACITOR	10	16V
C102	QENA1CM 106	NP.CAPACITOR	10	16V
C103	QCYA1HK-152	CER.CAPACITOR	1500P	50V
C104	QCYA1HK 152	CER.CAPACITOR	1500P	50V
C105	QCF81CZ 105	CER.CAPACITOR	1.0	16V
C106	QCF81CZ-105	CER.CAPACITOR	1.0	16V
C109	QETA1CM-106	E.CAPACITOR	10	16V
C110	QETA1CM-106	E.CAPACITOR	10	16V
C111	QCF81CZ-105	CER.CAPACITOR	1.0	16V
C112	QCF81CZ-105	CER.CAPACITOR	1.0	16V
C113	QCF81CZ-105	CER.CAPACITOR	1.0	16V
C114	QCF81CZ-105	CER.CAPACITOR	1.0	16V
C115	QENA1CM-106	NP.CAPACITOR	10	16V
C116	QENA1CM-106	NP.CAPACITOR	10	16V
C117	QENA1CM 106	NP.CAPACITOR	10	16V
C118	QENA1CM 106	NP.CAPACITOR	10	16V
C119	QCYA1HK 152	CER.CAPACITOR	1500P	50V
C120	QCYA1HK-152	CER.CAPACITOR	1500P	50V
C121	QCTA1CH 680	CER.CAPACITOR	68P	50V
C122	QCTA1CH-680	CER.CAPACITOR	68P	50V
C123	QCYA1HK-472	CER.CAPACITOR	4700P	50V
C124	QCYA1HK-472	CER.CAPACITOR	4700P	50V
C126	QCYA1HK 473	CER.CAPACITOR	0.047	50V
C201	QCYA1HK 103	CER.CAPACITOR	0.010	50V
C202	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C203	QETA1CM 476	E.CAPACITOR	47	16V
C204	QETA1CM-476	E.CAPACITOR	47	16V
C205	QETA1CM-476	E.CAPACITOR	47	16V
C206	QETA1CM-476	E.CAPACITOR	47	16V
C207	QFP42AJ 112	P.P.CAPACITOR	1100P	100V
C208	QFP42AJ-112	P.P.CAPACITOR	1100P	100V
C209	QCT25CH-181	CER.CAPACITOR	180P	50V
C210	QCT25CH-181	CER.CAPACITOR	180P	50V
C211	QCYA1HK 103	CER.CAPACITOR	0.010	50V
C212	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C213	QCTA1CH-221	CER.CAPACITOR	220P	50V
C214	QCTA1CH-221	CER.CAPACITOR	220P	50V
C215	QCTA1CH-221	CER.CAPACITOR	220P	50V
C216	QCTA1CH-221	CER.CAPACITOR	220P	50V
C217	QFP42AJ 153	P.P.CAPACITOR	0.015	100V
C218	QFP42AJ 153	P.P.CAPACITOR	0.015	100V
C219	QETA1CM-476	E.CAPACITOR	47	16V
C220	QETA1CM-476	E.CAPACITOR	47	16V
C221	QCYA1EK 103	CER.CAPACITOR	0.010	25V
C222	QCYA1EK 103	CER.CAPACITOR	0.010	25V
C223	QCYA1EK-103	CER.CAPACITOR	0.010	25V
C224	QCYA1EK-103	CER.CAPACITOR	0.010	25V

[NORMAL AUDIO (BR-S800)]

Symbol No.	Part No.	Part Name	Description
C227	QCYA1HK-223	CER.CAPACITOR	0.022 50V
C228	QCTA2CH-271	CER.CAPACITOR	270P 50V
C229	QCTA2CH-271	CER.CAPACITOR	270P 50V
C230	QCTA2CH-271	CER.CAPACITOR	270P 50V
C231	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C232	QETA1CM 476	E.CAPACITOR	47 16V
C233	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C234	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C235	QETA1CM-476	E.CAPACITOR	47 16V
C236	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C237	QETA1CM-476	E.CAPACITOR	47 16V
C239	QETA1CM-226	E.CAPACITOR	22 16V
C240	QETA1CM-226	E.CAPACITOR	22 16V
C243	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C244	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C301	QFN41HJ-153	MY.CAPACITOR	0.015 50V
C302	QETA1AM-227	E.CAPACITOR	220 10V
C303	QENA1CM 106	NP.CAPACITOR	10 16V
C304	QFN41HJ 333	MY.CAPACITOR	0.033 50V
C305	QCSA1HJ 821	CER.CAPACITOR	820P 50V
C306	QCYA1HK-182	CER.CAPACITOR	1800P 50V
C307	QFN41HJ 103	MY.CAPACITOR	0.010 50V
C308	QCTA1CH 270	CER.CAPACITOR	27P 50V
C309	QETA1EM 475	E.CAPACITOR	4.7 25V
C310	QENA1CM 106	NP.CAPACITOR	10 16V
C311	QETA1CM-226	E.CAPACITOR	22 16V
C312	QETA1CM-476	E.CAPACITOR	47 16V
C313	QETA1EM-475	E.CAPACITOR	4.7 25V
C314	QETA1EM-475	E.CAPACITOR	4.7 25V
C315	QETA1CM-106	E.CAPACITOR	10 16V
C316	QEE81EM-105	E.CAPACITOR	1.0 25V
C317	QETA1CM-476	E.CAPACITOR	47 16V
C318	QENA1EM-475	NP.CAPACITOR	4.7 25V
C319	QETA1CM-106	E.CAPACITOR	10 16V
C320	QENA1EM-475	NP.CAPACITOR	4.7 25V
C321	QETA1CM-272	E.CAPACITOR	220 16V
C322	QETA1CM-476	E.CAPACITOR	47 16V
C326	QETA1CM-106	E.CAPACITOR	10 16V
C328	QETA1CM-476	E.CAPACITOR	47 16V
C329	QCTA1CH-101	CER.CAPACITOR	100P 50V
L1	PGZ00917-822	COIL	8.2mH
L2	PGZ00917-822	COIL	8.2mH
L3	PGZ00917-682	COIL	6.8mH
L4	PGZ00917-682	COIL	6.8mH
L5	PGZ00917-472	COIL	4.7mH
L6	PGZ00917-472	COIL	4.7mH
L201	PU48530-3R9	PEAKING COIL	3.9μH
L203	PU48530-330	PEAKING COIL	33μH
L204	PU48530-330	PEAKING COIL	33μH
L301	PGZ02044-222	PEAKING COIL	2.2mH
LC1	PU60206	LPF	
LC2	PU60206	LPF	
⚠ TH1	ERT-D2FGL103S	THERMISTOR	
⚠ TH2	ERT-D2FGL103S	THERMISTOR	
⚠ TH3	ERT-D2FHL102S	THERMISTOR	

Symbol No.	Part No.	Part Name	Description
⚠ TH4	ERT-D2FHL102S	THERMISTOR	
⚠ TH201	ERT-D2FHL102S	THERMISTOR	
⚠ TH202	ERT-D2FHL102S	THERMISTOR	
RY1	PU55260	RELAY	
CN1	PU59555-3	CONNECTOR	3PIN
CN2	PU59555-3	CONNECTOR	3PIN
CN3	PU59973-18	CONNECTOR	18PIN
CN4	PU59973-30	CONNECTOR	30PIN
CN5	PU59973-30	CONNECTOR	30PIN
CN201	PU59555-4	CONNECTOR	4PIN
TP1	SQMX001-001	TEST POINT	
DA201	DA204K	DIODE	ROHM
DA302	DA204K	DIODE	ROHM
T201	PGZ01859	TRANSFORMER	
T202	PGZ01859	TRANSFORMER	

6.9 NORMAL AUDIO(BR-S500) BOARD ASSEMBLY LIST [2][2]

PRK10140A-05 [2][2]□□□□□□

Symbol No.	Part No.	Part Name	Description
IC1	M5220P	I.C.(M)	MITSUBISHI
IC2	M5220P	I.C.(M)	MITSUBISHI
IC3	M51132L	I.C.(M)	MITSUBISHI
IC4	M51132L	I.C.(M)	MITSUBISHI
IC5	CXA1101P	I.C.(M)	SONY
IC301	TC4066BP	I.C.(M)	TOSHIBA
IC302	M5218AP	I.C.(M)	MITSUBISHI
IC303	UPC393C	I.C.(M)	NEC
Q1	DTC124EK	TRANSISTOR	ROHM
Q2	DTC124EK	TRANSISTOR	ROHM
Q3	DTA124EK	TRANSISTOR	ROHM
Q4	DTC323TK	TRANSISTOR	ROHM
Q5	DTC323TK	TRANSISTOR	ROHM
Q6	DTC323TK	TRANSISTOR	ROHM
Q7	2SK208	F.E.T.	TOSHIBA
Q8	2SK208	F.E.T.	TOSHIBA
Q9	DTC323TK	TRANSISTOR	ROHM
Q10	DTC323TK	TRANSISTOR	ROHM
Q11	2SD973AR	TRANSISTOR	MATSUSHITA
Q12	2SD973AR	TRANSISTOR	MATSUSHITA
Q13	DTA124EK	TRANSISTOR	ROHM
Q14	DTA124EK	TRANSISTOR	ROHM
Q15	DTC124EK	TRANSISTOR	ROHM
Q16	DTC124EK	TRANSISTOR	ROHM
Q301	2SD973AR	TRANSISTOR	MATSUSHITA
Q302	2SC2412K	TRANSISTOR	ROHM
R1	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R2	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R3	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R4	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R5	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R6	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R7	QRSA08J-105	M.G.RESISTOR	1.0M 1/10W
R8	QRSA08J-105	M.G.RESISTOR	1.0M 1/10W
R9	QRSA08J-155	M.G.RESISTOR	1.5M 1/10W
R10	QRSA08J-155	M.G.RESISTOR	1.5M 1/10W
R11	QRSA08J-202	M.G.RESISTOR	2.0K 1/10W
R12	QRSA08J-202	M.G.RESISTOR	2.0K 1/10W
R13	QRSA08J-432	M.G.RESISTOR	4.3K 1/10W
R14	QRSA08J-432	M.G.RESISTOR	4.3K 1/10W
R15	QRSA08J-124	M.G.RESISTOR	120K 1/10W
R16	QRSA08J-124	M.G.RESISTOR	120K 1/10W
R17	QRSA08J-101	M.G.RESISTOR	100 1/10W
R18	QRSA08J-101	M.G.RESISTOR	100 1/10W
R19	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R20	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W
R21	QRSA08J-821	M.G.RESISTOR	820 1/10W
R22	QRSA08J-821	M.G.RESISTOR	820 1/10W
R23	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R24	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R25	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R26	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R29	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R30	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R31	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R32	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R33	QRSA08J-473	M.G.RESISTOR	47K 1/10W

Symbol No.	Part No.	Part Name	Description
R34	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R35	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R36	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R37	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R38	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R39	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R40	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R41	QRSA08J-202	M.G.RESISTOR	2.0K 1/10W
R42	QRSA08J-202	M.G.RESISTOR	2.0K 1/10W
R43	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R44	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R45	QRSA08J-433	M.G.RESISTOR	43K 1/10W
R46	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R47	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R48	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R51	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R55	QRSA08J-124	M.G.RESISTOR	120K 1/10W
R56	QRSA08J-124	M.G.RESISTOR	120K 1/10W
R57	QRSA08J-224	M.G.RESISTOR	220K 1/10W
R58	QRSA08J-224	M.G.RESISTOR	220K 1/10W
R59	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R60	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R61	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R63	QRSA08J-821	M.G.RESISTOR	820 1/10W
R64	QRSA08J-821	M.G.RESISTOR	820 1/10W
R301	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R302	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R303	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R304	QRSA08J-184	M.G.RESISTOR	180K 1/10W
R305	QRSA08J-563	M.G.RESISTOR	56K 1/10W
R306	QRSA08J-333	M.G.RESISTOR	33K 1/10W
R307	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R308	QRSA08J-122	M.G.RESISTOR	1.2K 1/10W
R309	QRSA08J-685	M.G.RESISTOR	6.8M 1/10W
R310	QRSA08J-101	M.G.RESISTOR	100 1/10W
R311	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R312	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R313	QRSA08J-182	M.G.RESISTOR	1.8K 1/10W
R314	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R315	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R316	QRSA08J-184	M.G.RESISTOR	180K 1/10W
R317	QRSA08J-682	M.G.RESISTOR	6.8K 1/10W
R318	QRSA08J-474	M.G.RESISTOR	470K 1/10W
R319	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R320	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R321	QRSA08J-682	M.G.RESISTOR	6.8K 1/10W
R322	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R323	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R324	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R325	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R326	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R327	QRSA08J-561	M.G.RESISTOR	560 1/10W
R328	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R329	QRSA08J-750	M.G.RESISTOR	75 1/10W
R330	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R332	QRSA08J-104	M.G.RESISTOR	100K 1/10W
C1	QCTA1CH-821	CER.CAPACITOR	820P 50V
C2	QCTA1CH-821	CER.CAPACITOR	820P 50V

[NORMAL AUDIO (BR-S500)]

Symbol No.	Part No.	Part Name	Description
C3	QCYA1HK-152	CER.CAPACITOR	1500P 50V
C4	QCYA1HK 152	CER.CAPACITOR	1500P 50V
C5	QEBA1HM-105	E.CAPACITOR	1.0 50V
C6	QEBA1HM-105	E.CAPACITOR	1.0 50V
C7	QCTA1CH-101	CER.CAPACITOR	100P 50V
C8	QCTA1CH 101	CER.CAPACITOR	100P 50V
C9	QFN41HJ-273	MY.CAPACITOR	0.027 50V
C10	QFN41HJ-273	MY.CAPACITOR	0.027 50V
C11	QETA1CM 107	E.CAPACITOR	100 16V
C12	QETA1CM-107	E.CAPACITOR	100 16V
C13	QETA1CM 476	E.CAPACITOR	47 16V
C14	QETA1CM-476	E.CAPACITOR	47 16V
C15	QENA1CM 106	NP.CAPACITOR	10 16V
C16	QENA1CM 106	NP.CAPACITOR	10 16V
C17	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C18	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C19	QETA1CM 107	E.CAPACITOR	100 16V
C20	QETA1CM-107	E.CAPACITOR	100 16V
C21	QETA1CM-476	E.CAPACITOR	47 16V
C22	QETA1CM-476	E.CAPACITOR	47 16V
C23	QETA1CM-226	E.CAPACITOR	22 16V
C24	QETA1CM-226	E.CAPACITOR	22 16V
C25	QETA1EM-475	E.CAPACITOR	4.7 25V
C26	QETA1EM-475	E.CAPACITOR	4.7 25V
C27	QFN41HJ-682	MY.CAPACITOR	6800P 50V
C28	QFN41HJ-682	MY.CAPACITOR	6800P 50V
C29	QENA1EM-475	NP.CAPACITOR	4.7 25V
C30	QENA1EM-475	NP.CAPACITOR	4.7 25V
C31	QENA1EM-475	NP.CAPACITOR	4.7 25V
C32	QENA1EM-475	NP.CAPACITOR	4.7 25V
C33	QETA1CM 106	E.CAPACITOR	10 16V
C34	QETA1CM 106	E.CAPACITOR	10 16V
C35	QFN41HJ-822	MY.CAPACITOR	8200P 50V
C36	QFN41HJ-822	MY.CAPACITOR	8200P 50V
C37	QETA1HM-105	E.CAPACITOR	1.0 50V
C38	QETA1HM-105	E.CAPACITOR	1.0 50V
C39	NEEA1VM-684	TAN.CAPACITOR	0.68 35V
C40	NEE21VM-684	TAN.CAPACITOR	0.68 35V
C41	QCYA1HK 103	CER.CAPACITOR	0.010 50V
C42	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C43	QETA1CM-107	E.CAPACITOR	100 16V
C44	QETA1CM-107	E.CAPACITOR	100 16V
C45	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C46	QETA1CM-476	E.CAPACITOR	47 16V
C47	QETA1CM-107	E.CAPACITOR	100 16V
C48	QETA1CM 107	E.CAPACITOR	100 16V
C49	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C50	QETA1CM-476	E.CAPACITOR	47 16V
C53	QENA1CM-106	NP.CAPACITOR	10 16V
C54	QENA1CM-106	NP.CAPACITOR	10 16V
C55	QETA1CM-106	E.CAPACITOR	10 16V
C56	QETA1CM-106	E.CAPACITOR	10 16V
C57	QETA1CM-106	E.CAPACITOR	10 16V
C58	QETA1CM-106	E.CAPACITOR	10 16V
C59	QETA1CM-476	E.CAPACITOR	47 16V
C61	QETA1CM-107	E.CAPACITOR	100 16V
C62	QETA1CM-107	E.CAPACITOR	100 16V
C63	QCTA1CH-680	CER.CAPACITOR	68P 50V
C64	QCTA1CH-680	CER.CAPACITOR	68P 50V

Symbol No.	Part No.	Part Name	Description
C301	QFN41HJ-153	MY.CAPACITOR	0.015 50V
C302	QETA1CM-227	E.CAPACITOR	220 16V
C303	QEBA1EM-475	E.CAPACITOR	4.7 25V
C304	QENA1CM-106	NP.CAPACITOR	10 16V
C305	QETA1CM-226	E.CAPACITOR	22 16V
C306	QENA1EM-475	NP.CAPACITOR	4.7 25V
C307	QETA1CM 106	E.CAPACITOR	10 16V
C308	QENA1EM-475	NP.CAPACITOR	4.7 25V
C309	QETA1CM-272	E.CAPACITOR	220 16V
C310	QETA1CM-107	E.CAPACITOR	100 16V
C311	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C312	QETA1CM-107	E.CAPACITOR	100 16V
C313	QETA1CM 476	E.CAPACITOR	47 16V
C314	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C315	QETA1CM-107	E.CAPACITOR	100 16V
C316	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C317	QETA1CM-476	E.CAPACITOR	47 16V
C318	QETA1CM 107	E.CAPACITOR	100 16V
C319	QCSA1HJ-101	CER.CAPACITOR	100P 50V
L1	PU48530-271	PEAKING COIL	270μH
L2	PU48530-271	PEAKING COIL	270μH
L301	PU48530-271	PEAKING COIL	270μH
LC1	PU60206	LPF	
LC2	PU60206	LPF	
⚠ TH1	ERT D2FHL102	THERMISTOR	
⚠ TH2	ERT-D2FHL102	THERMISTOR	
CN1	PU59555-3	CONNECTOR	3PIN
CN2	PU59555-3	CONNECTOR	3PIN
CN4	PU59973 30	CONNECTOR	30PIN
CN5	PU59973-30	CONNECTOR	30PIN
TP1	SQMX001 001	TEST POINT	

6.10 A/V I/O BOARD ASSEMBLY LIST [2][3]

PRK10150A-03 (BR-S800)

PRK10150B-03 (BR-S500) [2][3]□□□□□□□

Symbol No.	Part No.	Part Name	Description	
IC1	TC4053BP	I.C.(M)	TOSHIBA	
IC2	M5218AP	I.C.(M)	MITSUBISHI	
IC3	M5201L	I.C.(M)	MITSUBISHI	
IC4	M5201L	I.C.(M)	MITSUBISHI	
IC5	TC4052BP	I.C.(M)	TOSHIBA	
IC6	M5218AP	I.C.(M)	MITSUBISHI	
IC7	M50253P	I.C.(M)	MITSUBISHI	
IC8	M5218AP	I.C.(M)	MITSUBISHI	
IC51	M5201L	I.C.(M)	MITSUBISHI	BR-S800
IC52	M5201L	I.C.(M)	MITSUBISHI	BR-S800
IC53	M5201L	I.C.(M)	MITSUBISHI	BR-S800
IC54	M5201L	I.C.(M)	MITSUBISHI	BR-S800
IC55	M5201L	I.C.(M)	MITSUBISHI	BR-S800
IC56	M5218AP	I.C.(M)	MITSUBISHI	
IC201	M52684AP	I.C.(M)	MITSUBISHI	
IC202	M35010-089SP	I.C.(M)	MITSUBISHI	
Q5	DTC323TK	TRANSISTOR	ROHM	
Q6	DTC323TK	TRANSISTOR	ROHM	
Q7	DTC323TK	TRANSISTOR	ROHM	
Q8	DTC323TK	TRANSISTOR	ROHM	
Q9	DTC323TK	TRANSISTOR	ROHM	
Q10	2SD973AR	TRANSISTOR	MATSUSHITA	
Q11	2SA1037K	TRANSISTOR	ROHM	
Q12	DTA124EK	TRANSISTOR	ROHM	
Q13	DTC323TK	TRANSISTOR	ROHM	
Q14	DTC323TK	TRANSISTOR	ROHM	
Q15	DTA124EK	TRANSISTOR	ROHM	
Q51	DTC323TK	TRANSISTOR	ROHM	
Q52	DTC323TK	TRANSISTOR	ROHM	
Q53	2SC2412K	TRANSISTOR	ROHM	
Q54	2SC2412K	TRANSISTOR	ROHM	
Q201	2SC2778(C)	TRANSISTOR	MATSUSHITA	
Q202	2SC2778(C)	TRANSISTOR	MATSUSHITA	
Q203	2SA1022(C)	TRANSISTOR	MATSUSHITA	
Q204	2SA1022(C)	TRANSISTOR	MATSUSHITA	
Q205	2SC2778(C)	TRANSISTOR	MATSUSHITA	
Q206	2SC2778(C)	TRANSISTOR	MATSUSHITA	
Q207	2SC2778(C)	TRANSISTOR	MATSUSHITA	
Q208	2SD601A(Q)	TRANSISTOR	MATSUSHITA	
Q209	2SD601A(Q)	TRANSISTOR	MATSUSHITA	
Q210	DTC144EK	TRANSISTOR	ROHM	
D1	DAN202K	DIODE ARRAY	ROHM	
D2	DAN202K	DIODE ARRAY	ROHM	
D51	DAN202K	DIODE ARRAY	ROHM	
D52	DAN202K	DIODE ARRAY	ROHM	
D201	DAN202K	DIODE ARRAY	ROHM	
D202	DAN202K	DIODE ARRAY	ROHM	
R1	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R2	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R3	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R4	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R5	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R6	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R7	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R8	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R9	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W

Symbol No.	Part No.	Part Name	Description		
R10	QRSA08J 122	M.G.RESISTOR	1.2K		1/10W
R11	QRSA08J 124	M.G.RESISTOR	120K		1/10W
R12	QRSA08J-124	M.G.RESISTOR	120K		1/10W
R13	QRSA08J 823	M.G.RESISTOR	82K		1/10W
R14	QRSA08J-823	M.G.RESISTOR	82K		1/10W
R15	QRSA08J-823	M.G.RESISTOR	82K		1/10W
R16	QRSA08J-823	M.G.RESISTOR	82K		1/10W
R17	QRSA08J 122	M.G.RESISTOR	1.2K		1/10W
R18	QRSA08J 122	M.G.RESISTOR	1.2K		1/10W
R19	QRSA08J-124	M.G.RESISTOR	120K		1/10W
R20	QRSA08J 124	M.G.RESISTOR	120K		1/10W
R21	QRSA08J-223	M.G.RESISTOR	22K		1/10W
R22	QRSA08J-823	M.G.RESISTOR	82K		1/10W
R23	QRSA08J-823	M.G.RESISTOR	82K		1/10W
R24	QRSA08J 223	M.G.RESISTOR	22K		1/10W
R25	QRSA08J-393	M.G.RESISTOR	39K		1/10W
R26	QRSA08J-393	M.G.RESISTOR	39K		1/10W
R29	QRSA08J-563	M.G.RESISTOR	56K		1/10W
R30	QRSA08J 563	M.G.RESISTOR	56K		1/10W
R31	QRSA08J-433	M.G.RESISTOR	43K		1/10W
R32	QRSA08J-393	M.G.RESISTOR	39K		1/10W
R33	QRSA08J 563	M.G.RESISTOR	56K		1/10W
R34	QRSA08J 563	M.G.RESISTOR	56K		1/10W
R35	QRSA08J-122	M.G.RESISTOR	1.2K		1/10W
R36	QRSA08J-124	M.G.RESISTOR	120K		1/10W
R37	QRSA08J 823	M.G.RESISTOR	82K		1/10W
R38	QRSA08J 823	M.G.RESISTOR	82K		1/10W
R39	QRSA08J-391	M.G.RESISTOR	390		1/10W
R40	QRSA08J 122	M.G.RESISTOR	1.2K		1/10W
R41	QRSA08J 103	M.G.RESISTOR	10K		1/10W
R51	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W	BR S800
R52	QRSA08J 822	M.G.RESISTOR	8.2K	1/10W	BR S800
R53	QRSA08J 822	M.G.RESISTOR	8.2K	1/10W	BR S800
R54	QRSA08J-223	M.G.RESISTOR	22K	1/10W	BR S800
R55	QRSA08J-333	M.G.RESISTOR	33K	1/10W	BR-S800
R56	QRSA08J-333	M.G.RESISTOR	33K	1/10W	BR-S800
R57	QRSA08J 333	M.G.RESISTOR	33K	1/10W	BR S800
R58	QRSA08J 333	M.G.RESISTOR	33K	1/10W	BR S800
R59	QRSA08J-333	M.G.RESISTOR	33K	1/10W	BR S800
R60	QRSA08J-333	M.G.RESISTOR	33K	1/10W	BR-S800
R61	QRSA08J 333	M.G.RESISTOR	33K	1/10W	BR S800
R62	QRSA08J-333	M.G.RESISTOR	33K	1/10W	BR S800
R63	QRSA08J 822	M.G.RESISTOR	8.2K	1/10W	BR S800
R64	QRSA08J 223	M.G.RESISTOR	22K	1/10W	BR S800
R65	QRSA08J-333	M.G.RESISTOR	33K	1/10W	BR S800
R66	QRSA08J-333	M.G.RESISTOR	33K	1/10W	BR S800
R67	QRSA08J 333	M.G.RESISTOR	33K	1/10W	BR S800
R68	QRSA08J 333	M.G.RESISTOR	33K	1/10W	BR S800
R69	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W	BR S800
R70	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W	BR S800
R71	QRSA08J 333	M.G.RESISTOR	33K	1/10W	BR S800
R72	QRSA08J-333	M.G.RESISTOR	33K	1/10W	BR S800
R73	QRSA08J-333	M.G.RESISTOR	33K	1/10W	BR S800
R74	QRSA08J 333	M.G.RESISTOR	33K	1/10W	BR S800
R75	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W	BR S800
R76	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W	BR S800
R77	QRSA08J-122	M.G.RESISTOR	1.2K	1/10W	BR-S800
R78	QRSA08J 122	M.G.RESISTOR	1.2K	1/10W	BR-S800
R82	QRSA08J 333	M.G.RESISTOR	33K	1/10W	BR S800

[A/V I/O]

Symbol No.	Part No.	Part Name	Description
R83	QRSA08J 333	M.G.RESISTOR	33K 1/10W BR S800
R84	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W BR S800
R85	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W BR S800
R86	QRSA08J 223	M.G.RESISTOR	22K 1/10W BR S800
R87	QRSA08J 823	M.G.RESISTOR	82K 1/10W
R88	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R89	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R90	QRSA08J 823	M.G.RESISTOR	82K 1/10W
R91	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R92	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R93	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R94	QRSA08J 393	M.G.RESISTOR	39K 1/10W
R95	QRSA08J-471	M.G.RESISTOR	470 1/10W
R96	QRSA08J-471	M.G.RESISTOR	470 1/10W
R97	QRSA08J 152	M.G.RESISTOR	1.5K 1/10W
R98	QRSA08J 152	M.G.RESISTOR	1.5K 1/10W
R99	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R100	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R101	QRSA08J 223	M.G.RESISTOR	22K 1/10W
R102	QRSA08J-223	M.G.RESISTOR	22K 1/10W
R103	QRSA08J 821	M.G.RESISTOR	820 1/10W
R104	QRSA08J-821	M.G.RESISTOR	820 1/10W
R105	QRSA08J-181	M.G.RESISTOR	180 1/10W
R106	QRSA08J 181	M.G.RESISTOR	180 1/10W
R107	QVPC625 102	TRIM.RESISTOR	1K L AUDIO METR
R108	QVPC625-102	TRIM.RESISTOR	1K R AUDIO METR
R109	QRSA08J 822	M.G.RESISTOR	8.2K 1/10W
R110	QRSA08J-822	M.G.RESISTOR	8.2K 1/10W
R151	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R152	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R153	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R154	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R155	QRSA08J 823	M.G.RESISTOR	82K 1/10W
R156	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R157	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R158	QRSA08J-823	M.G.RESISTOR	82K 1/10W
R201	QRSA08J 223	M.G.RESISTOR	22K 1/10W
R202	QRSA08J 153	M.G.RESISTOR	15K 1/10W
R203	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R204	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R205	QRSA08J-272	M.G.RESISTOR	2.7K 1/10W
R207	QRSA08J-221	M.G.RESISTOR	220 1/10W
R208	QRSA08J-392	M.G.RESISTOR	3.9K 1/10W
R209	QRSA08J-682	M.G.RESISTOR	6.8K 1/10W
R210	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W
R211	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R212	QRSA08J-561	M.G.RESISTOR	560 1/10W
R213	QRSA08J-182	M.G.RESISTOR	1.8K 1/10W
R214	QRSA08J-154	M.G.RESISTOR	150K 1/10W
R215	QRSA08J-333	M.G.RESISTOR	33K 1/10W
R216	QRSA08J-333	M.G.RESISTOR	33K 1/10W
R217	QRSA08J 222	M.G.RESISTOR	2.2K 1/10W
R218	QRG129J-820	O.M.F.RESISTOR	82 1/2W
R219	QRSA08J-330	M.G.RESISTOR	33 1/10W
R220	QRSA08J-123	M.G.RESISTOR	12K 1/10W
R221	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R222	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R223	QRSA08J-750	M.G.RESISTOR	75 1/10W
R224	QRSA08J-271	M.G.RESISTOR	270 1/10W

Symbol No.	Part No.	Part Name	Description
R225	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R226	QRSA08J-393	M.G.RESISTOR	39K 1/10W
R227	QRSA08J 152	M.G.RESISTOR	1.5K 1/10W
R228	QRSA08J 101	M.G.RESISTOR	100 1/10W
R229	QRSA08J-681	M.G.RESISTOR	680 1/10W
R230	QRSA08J-183	M.G.RESISTOR	18K 1/10W
R231	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R232	QRSA08J 154	M.G.RESISTOR	150K 1/10W
R233	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R234	QRSA08J 472	M.G.RESISTOR	4.7K 1/10W
R235	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R236	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R237	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W
R238	QRSA08J-221	M.G.RESISTOR	220 1/10W
R239	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W
R240	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W
R241	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W
R242	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R243	QRSA08J-471	M.G.RESISTOR	470 1/10W
C1	QEPA1CM-106	E.CAPACITOR	10 16V
C2	QEPA1CM 106	E.CAPACITOR	10 16V
C3	QEPA1CM-106	E.CAPACITOR	10 16V
C4	QEPA1CM-106	E.CAPACITOR	10 16V
C5	QER41CM-476	E.CAPACITOR	47 16V
C6	QER41CM-476	E.CAPACITOR	47 16V
C7	QER41CM 226	E.CAPACITOR	22 16V
C8	QER41CM-226	E.CAPACITOR	22 16V
C9	QEPA1CM-106	E.CAPACITOR	10 16V
C10	QEPA1CM 106	E.CAPACITOR	10 16V
C11	QER41CM-226	E.CAPACITOR	22 16V
C12	QER41CM 226	E.CAPACITOR	22 16V
C13	QER41CM 476	E.CAPACITOR	47 16V
C14	QER41CM-476	E.CAPACITOR	47 16V
C15	QEPA1CM-106	E.CAPACITOR	10 16V
C16	QEPA1CM-106	E.CAPACITOR	10 16V
C18	QER41CM 226	E.CAPACITOR	22 16V
C19	QER41CM-476	E.CAPACITOR	47 16V
C20	QER41CM 226	E.CAPACITOR	22 16V
C21	QER41CM 226	E.CAPACITOR	22 16V
C22	QER41CM-476	E.CAPACITOR	47 16V
C23	QETA1CM-107	E.CAPACITOR	100 16V
C24	QETA1CM 107	E.CAPACITOR	100 16V
C25	QER41CM-476	E.CAPACITOR	47 16V
C26	QETA1CM-107	E.CAPACITOR	100 16V
C27	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C28	QETA1CM-107	E.CAPACITOR	100 16V
C29	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C30	QER41CM-476	E.CAPACITOR	47 16V
C31	QCYA1HK-333	CER.CAPACITOR	0.033 50V
C32	QCYA1HK 333	CER.CAPACITOR	0.033 50V
C51	QER41CM 106	E.CAPACITOR	10 16V BR S800
C52	QER41CM-106	E.CAPACITOR	10 16V BR S800
C53	QER41CM-106	E.CAPACITOR	10 16V BR S800
C54	QER41CM 106	E.CAPACITOR	10 16V BR S800
C55	QER41CM-476	E.CAPACITOR	47 16V BR S800
C56	QER41CM-476	E.CAPACITOR	47 16V BR S800
C57	QER41CM 106	E.CAPACITOR	10 16V BR S800
C58	QER41CM 106	E.CAPACITOR	10 16V BR S800

Symbol No.	Part No.	Part Name	Description
C59	QER41CM-106	E.CAPACITOR	10 16V BR S800
C60	QER41CM-106	E.CAPACITOR	10 16V BR-S800
C61	QER41CM 476	E.CAPACITOR	47 16V BR S800
C62	QER41CM-476	E.CAPACITOR	47 16V BR-S800
C64	QER41CM-106	E.CAPACITOR	10 16V BR-S800
C65	QER41CM-476	E.CAPACITOR	47 16V BR-S800
C66	QER41CM 476	E.CAPACITOR	47 16V BR-S800
C67	QEPA1CM-106	E.CAPACITOR	10 16V
C68	QEPA1CM-106	E.CAPACITOR	10 16V
C69	QER41CM-106	E.CAPACITOR	10 16V
C70	QER41CM-106	E.CAPACITOR	10 16V
C71	QER41CM-226	E.CAPACITOR	22 16V
C72	QER41CM-226	E.CAPACITOR	22 16V
C73	QER41CM-475	E.CAPACITOR	4.7 16V
C74	QER41CM 475	E.CAPACITOR	4.7 16V
C75	QER41CM-476	E.CAPACITOR	47 16V
C201	QER41CM-476	E.CAPACITOR	47 16V
C202	QCYA1HK 223	CER.CAPACITOR	0.022 50V
C203	QEK41CM 107	E.CAPACITOR	100 16V
C205	QENA1CM-106	NP.CAPACITOR	10 16V
C206	QCTA1CH-331	CER.CAPACITOR	330P 50V
C207	QETA1HM 335	E.CAPACITOR	3.3 50V
C208	QEK41CM-107	E.CAPACITOR	100 16V
C209	QCTA1CH-181	CER.CAPACITOR	180P 50V
C210	QER41CM 476	E.CAPACITOR	47 16V
C211	PU54990 3	E CAP	10000 63V
C212	QER41AM-227	E.CAPACITOR	220 10V
C213	QCYA1HK-223	CER.CAPACITOR	0.022 50V
C214	QCTA1CH-220	CER.CAPACITOR	22P 50V
C215	QCYA1HK-152	CER.CAPACITOR	1500P 50V
C216	QCYA1HK-222	CER.CAPACITOR	2200P 50V
C217	QER41HM 105	E.CAPACITOR	1.0 50V
C218	QCYA1HK 103	CER.CAPACITOR	0.010 50V
C219	PU59499	BUS WIRE	
C220	PU57672-500	TRIMER CAP	50P H POSITION
C221	QCTA1CH 150	CER.CAPACITOR	15P 50V
C222	QCTA1CH 560	CER.CAPACITOR	56P 50V
C223	QER41CM-476	E.CAPACITOR	47 16V
C224	QCYA1HK-223	CER.CAPACITOR	0.022 50V
C225	QCTA1CH 100	CER.CAPACITOR	10P 50V
C226	PU57672 200	TRIMER CAP	20P 4fsc
C227	QER41CM-476	E.CAPACITOR	47 16V
C228	QCYA1HK 223	CER.CAPACITOR	0.022 50V
C229	QCYA1HK 103	CER.CAPACITOR	0.010 50V
C230	QCTA1CH-101	CER.CAPACITOR	100P 50V
C232	QCTA1CH-101	CER.CAPACITOR	100P 50V
L201	YU41135 221	COIL	220μH
L202	YU41135-221	COIL	220μH
L203	YU41135 221	COIL	220μH
L204	PU48530 220	PEAKING COIL	22μH
⚠ X1	PGZ00898	CRYSTAL	4fsc
⚠ CF1	PU60086	CERAMIC FILTER	

Symbol No.	Part No.	Part Name	Description
CN1	PGZ01937 44	CONNECTOR	44PIN
CN2	PGZ01937-44	CONNECTOR	44PIN
TP1	SQMX001 001	TEST POINT	
⚠ K201	PU60281 2	FERRITE BEADS	
⚠ K202	PU60281 2	FERRITE BEADS	
⚠ K203	QRD161J 0R0	CARBON RESISTOR	0 1/6W
⚠ K204	QRD161J-0R0	CARBON RESISTOR	0 1/6W
⚠ K205	PU60281-2	FERRITE BEADS	
SL1	PU36469	SHIELD CASE	
SL2	PU60657	SHIELD COVER	
SP1	PGZ01128-02	SPACER	

6.11 MECHA-CON/SERVO BOARD ASSEMBLY LIST 3 0

PRK10175A 3 0

Symbol No.	Part No.	Part Name	Description
IC1	UPD4053BG	I.C.(M)	NEC
IC2	UPD74HC04G	I.C.(M)	NEC
IC3	BA10393F	I.C.(M)	ROHM
IC4	TC4W53F	I.C.(M)	TOSHIBA
IC5	UPD4030BG	I.C.(M)	NEC
IC6	UPD4066BG	I.C.(M)	NEC
IC7	UPD4066BG	I.C.(M)	NEC
IC8	NJM2068MD	I.C.(M)	JRC
IC9	BA10393F	I.C.(M)	ROHM
IC10	NJM2068MD	I.C.(M)	JRC
IC11	BA10393F	I.C.(M)	ROHM
IC12	BA10358F	I.C.(M)	ROHM
IC13	UPD4013BG	I.C.(M)	NEC
IC14	SC78148GF-026	I.C.(M)	NEC
IC15	BR24C02F	I.C.(M)	ROHM
IC16	UPD74HC573GS	I.C.(M)	NEC
IC17	UPD74HC138G	I.C.(M)	NEC
IC18	PGD30620C-17-1	I.C.(M)	M27C512-15F1
SK18	PGZ01724 028	IC SOCKET	28PIN
IC21	UPD71055G	I.C.(M)	NEC
IC22	NJM2068MD	I.C.(M)	JRC
IC23	NJM2068MD	I.C.(M)	JRC
IC24	BA10358F	I.C.(M)	ROHM
IC25	BA10339F	I.C.(M)	ROHM
IC26	BA10358F	I.C.(M)	ROHM
IC28	BA10358F	I.C.(M)	ROHM
IC31	M62354FP	I.C.(M)	MITSUBISHI
IC32	NJM2068MD	I.C.(M)	JRC
IC33	TA8405S	I.C.(M)	TOSHIBA
IC34	BA10358F	I.C.(M)	ROHM
IC35	BA10393F	I.C.(M)	ROHM
IC36	TL431CLP	I.C.(M)	TEXAS
IC37	AN3834K	I.C.(M)	MATSUSHITA
IC38	AN3834K	I.C.(M)	MATSUSHITA
IC39	TC4S69F	I.C.(M)	TOSHIBA
IC40	TC4W53F	I.C.(M)	TOSHIBA
IC41	BA10393F	I.C.(M)	ROHM
Q1	2SC2412K(RS)	TRANSISTOR	ROHM
Q2	2SA1037K(QR)	TRANSISTOR	ROHM
Q3	2SC2412K(RS)	TRANSISTOR	ROHM
Q4	2SK621	FET	MATSUSHITA
Q5	2SK621	FET	MATSUSHITA
Q6	2SC2412K(QR)	TRANSISTOR	ROHM
Q7	DTC114EK	TRANSISTOR	ROHM
Q8	2SA1037K(QR)	TRANSISTOR	ROHM
Q9	2SC2412K(RS)	TRANSISTOR	ROHM
Q10	2SD1691(K)	TRANSISTOR	NEC
Q11	2SK621	FET	MATSUSHITA
Q12	DTA114EK	TRANSISTOR	ROHM
Q22	DTC114YK	TRANSISTOR	ROHM
Q23	DTC114WK	TRANSISTOR	ROHM
Q24	2SD1468S(RS)	TRANSISTOR	ROHM
Q25	2SB1151(L)	TRANSISTOR	NEC
Q26	2SB1073(PQ)	TRANSISTOR	MATSUSHITA
Q27	2SB1073(PQ)	TRANSISTOR	MATSUSHITA
Q30	2SB907	TRANSISTOR	TOSHIBA

Symbol No.	Part No.	Part Name	Description	
Q31	2SB1073(PQ)	TRANSISTOR	MATSUSHITA	
Q32	2SB1073(PQ)	TRANSISTOR	MATSUSHITA	
Q33	DTC114WK	TRANSISTOR	ROHM	
Q34	DTC114WK	TRANSISTOR	ROHM	
Q37	DTC114WK	TRANSISTOR	ROHM	
Q38	DTC114WK	TRANSISTOR	ROHM	
Q39	DTC114WK	TRANSISTOR	ROHM	
Q40	2SB1142(RST)	TRANSISTOR	SANYO	
Q41	2SD1468S(RS)	TRANSISTOR	ROHM	
Q42	DTA124EK	TRANSISTOR	ROHM	
Q43	2SB1142(RST)	TRANSISTOR	SANYO	
Q44	2SD1468S(RS)	TRANSISTOR	ROHM	
Q45	DTA124EK	TRANSISTOR	ROHM	
D1	DAN202K	DIODE	ROHM	
D2	RB400D	DIODE	ROHM	
D3	HZ5CLL	ZENER DIODE	HITACHI	
D4	HZ5CLL	ZENER DIODE	HITACHI	
D21	ERA15-02	DIODE	KYODO DENKI	
D22	ERA15-02	DIODE	KYODO DENKI	
D25	ERA15-02	DIODE	KYODO DENKI	
D26	ERA15-02	DIODE	KYODO DENKI	
D27	ERA15-02	DIODE	KYODO DENKI	
D28	RK14LF-B2	DIODE	SANKEN	
D29	DAN202K	DIODE	ROHM	
D30	RK14LF-B2	DIODE	SANKEN	
D31	DAN202K	DIODE	ROHM	
D32	MA3056(M)	DIODE	MATSUSHITA	
D33	DAN202K	DIODE	ROHM	
D34	DAN202K	DIODE	ROHM	
R3	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R4	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R5	QRSA08J-183	M.G.RESISTOR	18K	1/10W
R6	QRSA08J-183	M.G.RESISTOR	18K	1/10W
R7	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R8	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R9	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R10	QRSA08J-101	M.G.RESISTOR	100	1/10W
R11	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R12	QRSA08J-561	M.G.RESISTOR	560	1/10W
R13	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R14	NRVA62D-183	M.F.RESISTOR	18K	1/16W
R15	NRVA62D-334	M.F.RESISTOR	330K	1/16W
R16	NRVA62D-334	M.F.RESISTOR	330K	1/16W
R17	NRVA62D-334	M.F.RESISTOR	330K	1/16W
R18	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R19	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R20	QRSA08J-224	M.G.RESISTOR	220K	1/10W
R21	QRSA08J-474	M.G.RESISTOR	470K	1/10W
R22	QRSA08J-474	M.G.RESISTOR	470K	1/10W
R23	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R24	QRSA08J-224	M.G.RESISTOR	220K	1/10W
R25	NRVA62D-183	M.F.RESISTOR	18K	1/16W
R26	NRVA62D-334	M.F.RESISTOR	330K	1/16W
R27	NRVA62D-334	M.F.RESISTOR	330K	1/16W
R28	NRVA62D-334	M.F.RESISTOR	330K	1/16W
R29	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W

Symbol No.	Part No.	Part Name	Description	
R30	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R31	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R32	QRSA08J-332	M.G.RESISTOR	3.3K	1/10W
R33	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R34	QRSA08J-561	M.G.RESISTOR	560	1/10W
R35	QRSA08J-564	M.G.RESISTOR	560K	1/10W
R36	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R37	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R38	QRSA08J-105	M.G.RESISTOR	1.0M	1/10W
R39	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R40	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R41	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R42	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R43	QRSA08J-100	M.G.RESISTOR	10	1/10W
R44	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R45	QRSA08J-333	M.G.RESISTOR	33K	1/10W
R46	QRSA08J-183	M.G.RESISTOR	18K	1/10W
R47	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R48	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R49	QRSA08J-394	M.G.RESISTOR	390K	1/10W
R50	NRVA62D-473	M.F.RESISTOR	47K	1/16W
R51	NRVA62D-473	M.F.RESISTOR	47K	1/16W
R52	NRVA62D-222	M.F.RESISTOR	2.2K	1/16W
R53	QRSA08J-562	M.G.RESISTOR	5.6K	1/10W
R54	NRVA62D-222	M.F.RESISTOR	2.2K	1/16W
R55	QRSA08J-684	M.G.RESISTOR	680K	1/10W
R56	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R57	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R58	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R59	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R60	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R61	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R62	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R63	NRVA62D-222	M.F.RESISTOR	2.2K	1/16W
R64	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R65	QRSA08J-562	M.G.RESISTOR	5.6K	1/10W
R66	NRVA62D-222	M.F.RESISTOR	2.2K	1/16W
R67	QRSA08J-684	M.G.RESISTOR	680K	1/10W
R68	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R69	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R70	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R71	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R72	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R73	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R74	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R75	QRSA08J-105	M.G.RESISTOR	1.0M	1/10W
R76	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R77	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R78	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
R79	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R80	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R81	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
R82	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R83	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W
R84	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R85	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R86	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R87	QRSA08J-681	M.G.RESISTOR	680	1/10W
R88	QRSA08J-0R0	M.G.RESISTOR	0	1/10W

Symbol No.	Part No.	Part Name	Description	
R90	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R91	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R92	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R93	QRSA08J-184	M.G.RESISTOR	180K	1/10W
R94	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R95	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R96	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R97	QRSA08J-221	M.G.RESISTOR	220	1/10W
R98	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R99	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R100	QRSA08J-272	M.G.RESISTOR	2.7K	1/10W
R101	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R102	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R103	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R104	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R105	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R106	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R107	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R108	QRSA08J-121	M.G.RESISTOR	120	1/10W
R109	QRSA08J-121	M.G.RESISTOR	120	1/10W
R110	QRSA08J-121	M.G.RESISTOR	120	1/10W
R111	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R112	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R113	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R118	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R119	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R120	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R121	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R122	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R123	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R124	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R125	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R126	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R127	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R128	QRSA08J-152	M.G.RESISTOR	1.5K	1/10W
R130	QRSA08J-101	M.G.RESISTOR	100	1/10W
R131	QRSA08J-101	M.G.RESISTOR	100	1/10W
R132	QRSA08J-101	M.G.RESISTOR	100	1/10W
R133	QRSA08J-101	M.G.RESISTOR	100	1/10W
R134	QRSA08J-101	M.G.RESISTOR	100	1/10W
R135	QRSA08J-101	M.G.RESISTOR	100	1/10W
R136	QRSA08J-101	M.G.RESISTOR	100	1/10W
R137	QRSA08J-101	M.G.RESISTOR	100	1/10W
R138	QRSA08J-101	M.G.RESISTOR	100	1/10W
R139	QRSA08J-821	M.G.RESISTOR	820	1/10W
R202	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R203	QRSA08J-331	M.G.RESISTOR	330	1/10W
R204	QRSA08J-121	M.G.RESISTOR	120	1/10W
R205	QRSA08J-153	M.G.RESISTOR	15K	1/10W
R206	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R207	QRSA08J-333	M.G.RESISTOR	33K	1/10W
R208	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R209	QRSA08J-153	M.G.RESISTOR	15K	1/10W
R210	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R211	QRSA08J-224	M.G.RESISTOR	220K	1/10W
R212	QRSA08J-224	M.G.RESISTOR	220K	1/10W
R213	QRSA08J-272	M.G.RESISTOR	2.7K	1/10W
R214	QVPC625-103	TRIM.RESISTOR	10K	GAIN ADJ
R215	QRSA08J-273	M.G.RESISTOR	27K	1/10W

[MECHA-CON/SERVO]

Symbol No.	Part No.	Part Name	Description	
R216	QRSA08J-154	M.G.RESISTOR	150K	1/10W
R217	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R218	QRSA08J-221	M.G.RESISTOR	220	1/10W
R219	QRSA08J-333	M.G.RESISTOR	33K	1/10W
R220	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R221	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
R222	QVPC625-102	TRIM.RESISTOR	1K	BIAS ADJ
R223	QRSA08J-681	M.G.RESISTOR	680	1/10W
R224	QRSA08J-271	M.G.RESISTOR	270	1/10W
R225	QRSA08J-221	M.G.RESISTOR	220	1/10W
R226	QRSA08J-121	M.G.RESISTOR	120	1/10W
R227	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R228	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R229	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R230	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R231	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R232	QRSA08J-563	M.G.RESISTOR	56K	1/10W
R233	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R234	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R235	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R236	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R237	QRSA08J-332	M.G.RESISTOR	3.3K	1/10W
R238	QRSA08J-332	M.G.RESISTOR	3.3K	1/10W
R239	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R240	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R241	QRSA08J-274	M.G.RESISTOR	270K	1/10W
R242	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R243	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R244	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R245	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R246	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R247	QRSA08J-332	M.G.RESISTOR	3.3K	1/10W
R248	QRSA08J-332	M.G.RESISTOR	3.3K	1/10W
R249	QRSA08J-333	M.G.RESISTOR	33K	1/10W
R250	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R251	QRSA08J-474	M.G.RESISTOR	470K	1/10W
R252	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R253	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R254	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R255	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R260	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R261	QRSA08J-332	M.G.RESISTOR	3.3K	1/10W
R262	QRSA08J-332	M.G.RESISTOR	3.3K	1/10W
R263	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R264	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R265	QRSA08J-274	M.G.RESISTOR	270K	1/10W
R266	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R267	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R268	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R269	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R270	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R271	QRSA08J-332	M.G.RESISTOR	3.3K	1/10W
R272	QRSA08J-332	M.G.RESISTOR	3.3K	1/10W
R273	QRSA08J-333	M.G.RESISTOR	33K	1/10W
R274	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R275	QRSA08J-474	M.G.RESISTOR	470K	1/10W
R276	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R277	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R278	QRSA08J-223	M.G.RESISTOR	22K	1/10W

Symbol No.	Part No.	Part Name	Description	
R279	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R284	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R285	QRSA08J-473	M.G.RESISTOR	47K	1/10W
R286	QRSA08J-153	M.G.RESISTOR	15K	1/10W
R287	QRSA08J-393	M.G.RESISTOR	39K	1/10W
R288	QRSA08J-221	M.G.RESISTOR	220	1/10W
R291	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R292	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R293	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R294	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R295	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R296	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R297	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R298	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R299	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R300	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R301	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R302	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R303	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R304	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R305	QRSA08J-681	M.G.RESISTOR	680	1/10W
R306	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R307	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R308	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R309	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R314	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R315	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R316	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R317	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R318	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R319	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R320	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R321	QRSA08J-183	M.G.RESISTOR	18K	1/10W
R322	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R323	QRSA08J-183	M.G.RESISTOR	18K	1/10W
R324	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R325	QRG019J-561	O.M.F.RESISTOR	560	1W
R326	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R327	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R328	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R329	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R330	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R331	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R332	QRX029J-R56	M.F.RESISTOR	0.56	2W
R333	QRSA08J-221	M.G.RESISTOR	220	1/10W
R334	QRSA08J-221	M.G.RESISTOR	220	1/10W
R335	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R336	QRSA08J-333	M.G.RESISTOR	33K	1/10W
R337	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R338	QRG019J-561	O.M.F.RESISTOR	560	1W
R339	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R340	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R341	QRSA08J-104	M.G.RESISTOR	100K	1/10W
R342	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R343	QRSA08J-682	M.G.RESISTOR	6.8K	1/10W
R344	QRSA08J-223	M.G.RESISTOR	22K	1/10W
R345	QRSA08J-221	M.G.RESISTOR	220	1/10W
R346	QRX029J-R56	M.F.RESISTOR	0.56	2W
R347	QRSA08J-221	M.G.RESISTOR	220	1/10W

Symbol No.	Part No.	Part Name	Description	
R348	QRSA08J-823	M.G.RESISTOR	82K	1/10W
R349	QRSA08J-182	M.G.RESISTOR	1.8K	1/10W
R350	QRSA08J-562	M.G.RESISTOR	5.6K	1/10W
R351	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R352	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R353	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R354	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
R355	QRSA08J 103	M.G.RESISTOR	10K	1/10W
R356	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
R357	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
R358	QRSA08J 0R0	M.G.RESISTOR	0	1/10W
R360	QRSA08J-684	M.G.RESISTOR	680K	1/10W
R361	QRSA08J-562	M.G.RESISTOR	5.6K	1/10W
R362	QRSA08J 184	M.G.RESISTOR	180K	1/10W
R363	QRSA08J-274	M.G.RESISTOR	270K	1/10W
R364	QRSA08J 222	M.G.RESISTOR	2.2K	1/10W
R365	QRSA08J 222	M.G.RESISTOR	2.2K	1/10W
R366	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
C1	QENA1CM-476	NP.CAPACITOR	47	16V
C2	QETA1CM-476	E.CAPACITOR	47	16V
C3	QCFA1EZ-104	CER.CAPACITOR	0.10	25V
C4	QCFA1EZ 104	CER.CAPACITOR	0.10	25V
C5	QCFA1EZ-104	CER.CAPACITOR	0.10	25V
C6	QFP42AF-102	P.P.CAPACITOR	1000P	100V
C7	QCFA1EZ 104	CER.CAPACITOR	0.10	25V
C8	QCFA1EZ-104	CER.CAPACITOR	0.10	25V
C9	QFP42AF-102	P.P.CAPACITOR	1000P	100V
C10	QCYA1HK-102	CER.CAPACITOR	1000P	50V
C11	QCTA1CH-271	CER.CAPACITOR	270P	50V
C12	QCTA1CH-330	CER.CAPACITOR	33P	50V
C13	QCYA1HK-102	CER.CAPACITOR	1000P	50V
C14	QFN41HJ 473	MY.CAPACITOR	0.047	50V
C15	QETA1CM-106	E.CAPACITOR	10	16V
C16	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C17	QETA1CM-476	E.CAPACITOR	47	16V
C18	QETA1CM 476	E.CAPACITOR	47	16V
C19	QCFA1EZ-104	CER.CAPACITOR	0.10	25V
C20	QCTA1CH-100	CER.CAPACITOR	10P	50V
C21	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C22	QETA1CM-476	E.CAPACITOR	47	16V
C23	QCFA1EZ-104	CER.CAPACITOR	0.10	25V
C24	QCTA1CH-100	CER.CAPACITOR	10P	50V
C25	QCTA1CH-101	CER.CAPACITOR	100P	50V
C26	QCTA1CH-101	CER.CAPACITOR	100P	50V
C27	QETA1CM-106	E.CAPACITOR	10	16V
C28	QCYA1HK-102	CER.CAPACITOR	1000P	50V
C29	QCYA1HK-273	CER.CAPACITOR	0.027	50V
C30	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C31	QETA1HM-334	E.CAPACITOR	0.33	50V
C32	QCTA1CH-270	CER.CAPACITOR	27P	50V
C33	QCTA1CH-470	CER.CAPACITOR	47P	50V
C34	QCYA1HK-472	CER.CAPACITOR	4700P	50V
C35	QCYA1HK-472	CER.CAPACITOR	4700P	50V
C36	QCFA1EZ-104	CER.CAPACITOR	0.10	25V
C37	QETA1EM-475	E.CAPACITOR	4.7	25V
C38	QETA1HM-225	E.CAPACITOR	2.2	50V
C39	QCFA1EZ-104	CER.CAPACITOR	0.10	25V
C40	QCTA1CH-101	CER.CAPACITOR	100P	50V

Symbol No.	Part No.	Part Name	Description	
C41	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C42	QCYA1HK 103	CER.CAPACITOR	0.010	50V
C43	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C44	QETA1CM-476	E.CAPACITOR	47	16V
C45	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C46	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C47	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C48	QCFA1CZ-334	CER.CAPACITOR	0.33	16V
C49	QCFA1CZ-334	CER.CAPACITOR	0.33	16V
C50	QETA1CM 476	E.CAPACITOR	47	16V
C51	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C52	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C53	QCYA1HK-102	CER.CAPACITOR	1000P	50V
C54	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C55	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C56	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C57	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C58	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C59	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C60	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C61	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C62	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C63	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C64	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C65	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C66	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C67	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C68	QCTA1CH-101	CER.CAPACITOR	100P	50V
C69	QCTA1CH 101	CER.CAPACITOR	100P	50V
C70	QCTA1CH-101	CER.CAPACITOR	100P	50V
C71	QCTA1CH 101	CER.CAPACITOR	100P	50V
C72	QCTA1CH-101	CER.CAPACITOR	100P	50V
C73	QCTA1CH-101	CER.CAPACITOR	100P	50V
C74	QCTA1CH-101	CER.CAPACITOR	100P	50V
C75	QCTA1CH-101	CER.CAPACITOR	100P	50V
C76	QCTA1CH-101	CER.CAPACITOR	100P	50V
C77	QCTA1CH-101	CER.CAPACITOR	100P	50V
C79	QCTA1CH-101	CER.CAPACITOR	100P	50V
C80	QCTA1CH 101	CER.CAPACITOR	100P	50V
C81	QCTA1CH-101	CER.CAPACITOR	100P	50V
C82	QCTA1CH-101	CER.CAPACITOR	100P	50V
C83	QCTA1CH 101	CER.CAPACITOR	100P	50V
C84	QCTA1CH 101	CER.CAPACITOR	100P	50V
C85	QCTA1CH-101	CER.CAPACITOR	100P	50V
C86	QCTA1CH-101	CER.CAPACITOR	100P	50V
C87	QCTA1CH 101	CER.CAPACITOR	100P	50V
C88	QCTA1CH 101	CER.CAPACITOR	100P	50V
C89	QCTA1CH 101	CER.CAPACITOR	100P	50V
C90	QCTA1CH-101	CER.CAPACITOR	100P	50V
C91	QCTA1CH 101	CER.CAPACITOR	100P	50V
C92	QCTA1CH-101	CER.CAPACITOR	100P	50V
C93	QCTA1CH-101	CER.CAPACITOR	100P	50V
C94	QCTA1CH 101	CER.CAPACITOR	100P	50V
C95	QCTA1CH 101	CER.CAPACITOR	100P	50V
C96	QCTA1CH-101	CER.CAPACITOR	100P	50V
C97	QCYA1HK-102	CER.CAPACITOR	1000P	50V
C98	QCYA1HK 102	CER.CAPACITOR	1000P	50V
C101	QCYA1HK-102	CER.CAPACITOR	1000P	50V
C102	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C103	QETA1CM-476	E.CAPACITOR	47	16V

[MECHA-CON/SERVO]

Symbol No.	Part No.	Part Name	Description	
C104	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C105	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C106	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C107	QFN41HJ 104	MY.CAPACITOR	0.10	50V
C108	QCTA1CH-821	CER.CAPACITOR	820P	50V
C109	QCYA1HK 102	CER.CAPACITOR	1000P	50V
C110	QCYA1HK 102	CER.CAPACITOR	1000P	50V
C111	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C112	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C113	QCYA1HK 103	CER.CAPACITOR	0.010	50V
C114	QCFA1EZ-104	CER.CAPACITOR	0.10	25V
C115	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C116	QETA1CM 476	E.CAPACITOR	47	16V
C117	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C118	QETA1CM-476	E.CAPACITOR	47	16V
C119	QETA1CM 106	E.CAPACITOR	10	16V
C120	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C121	QETA1CM 106	E.CAPACITOR	10	16V
C122	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C123	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C124	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C125	QCYA1HK 103	CER.CAPACITOR	0.010	50V
C126	QCYA1HK 102	CER.CAPACITOR	1000P	50V
C127	QCYA1HK 103	CER.CAPACITOR	0.010	50V
C130	QCFA1EZ 104	CER.CAPACITOR	0.10	25V
C131	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C132	QCTA1CH-7R0	CER.CAPACITOR	7.0P	50V
C133	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C134	QCFA1EZ 104	CER.CAPACITOR	0.10	25V
C135	QCTA1CH-7R0	CER.CAPACITOR	7.0P	50V
C138	QCFA1EZ 104	CER.CAPACITOR	0.10	25V
C139	QCTA1CH-7R0	CER.CAPACITOR	7.0P	50V
C140	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C141	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C142	QCFA1EZ 104	CER.CAPACITOR	0.10	25V
C143	QCTA1CH-7R0	CER.CAPACITOR	7.0P	50V
C146	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C147	QETA1CM-476	E.CAPACITOR	47	16V
C148	QCYA1HK 472	CER.CAPACITOR	4700P	50V
C149	QCYA1HK 472	CER.CAPACITOR	4700P	50V
C150	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C151	QCYA1HK 103	CER.CAPACITOR	0.010	50V
C152	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C153	QCYA1HK-102	CER.CAPACITOR	1000P	50V
C154	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C155	QCYA1HK 103	CER.CAPACITOR	0.010	50V
C156	QCYA1HK-103	CER.CAPACITOR	0.010	50V
C157	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C158	QETA1VM-227	E.CAPACITOR	220	35V
C159	QETA1EM 476	E.CAPACITOR	47	25V
C160	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C161	QETA1CM-476	E.CAPACITOR	47	16V
C162	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C163	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C164	QETA1CM-476	E.CAPACITOR	47	16V
C165	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C166	QETA1CM-476	E.CAPACITOR	47	16V
C167	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C168	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C169	QCYA1HK-223	CER.CAPACITOR	0.022	50V

Symbol No.	Part No.	Part Name	Description	
C170	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C171	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C172	QETA1EM 107	E.CAPACITOR	100	25V
C173	QEZ0139-107	E.CAPACITOR	100	35V
C174	QEZ0139 107	E.CAPACITOR	100	35V
C175	QEZ0139 107	E.CAPACITOR	100	35V
C176	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C177	QETA1CM 106	E.CAPACITOR	10	16V
C178	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C179	QETA1EM 476	E.CAPACITOR	47	25V
C180	QFV41HJ 104	S.M.F.CAPACITOR	0.10	50V
C181	QCYA1HK 223	CER.CAPACITOR	0.022	50V
C183	QFV41HJ 104	S.M.F.CAPACITOR	0.10	50V
C184	QFV41HJ 104	S.M.F.CAPACITOR	0.10	50V
C185	QFV41HJ-154	S.M.F.CAPACITOR	0.15	50V
C186	QFV41HJ 154	S.M.F.CAPACITOR	0.15	50V
C187	QFV41HJ 154	S.M.F.CAPACITOR	0.15	50V
C188	QETA1HM 475	E.CAPACITOR	4.7	50V
C189	QETA1HM-475	E.CAPACITOR	4.7	50V
C190	QETA1HM 475	E.CAPACITOR	4.7	50V
C191	QCYA1HK 472	CER.CAPACITOR	4700P	50V
C192	QCYA1HK 472	CER.CAPACITOR	4700P	50V
C193	QCYA1HK 472	CER.CAPACITOR	4700P	50V
C194	QETA1VM 227	E.CAPACITOR	220	35V
C195	QETA1VM 227	E.CAPACITOR	220	35V
C196	QEZ0139-107	E.CAPACITOR	100	35V
C197	QEZ0139 107	E.CAPACITOR	100	35V
C198	QEZ0139 107	E.CAPACITOR	100	35V
C199	QETA1CM 106	E.CAPACITOR	10	16V
C200	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C201	QETA1EM 476	E.CAPACITOR	47	25V
C202	QFV41HJ 104	S.M.F.CAPACITOR	0.10	50V
C203	QCYA1HK-223	CER.CAPACITOR	0.022	50V
C205	QFV41HJ 104	S.M.F.CAPACITOR	0.10	50V
C206	QFV41HJ 104	S.M.F.CAPACITOR	0.10	50V
C207	QFV41HJ 154	S.M.F.CAPACITOR	0.15	50V
C208	QFV41HJ-154	S.M.F.CAPACITOR	0.15	50V
C209	QFV41HJ 154	S.M.F.CAPACITOR	0.15	50V
C210	QETA1HM 475	E.CAPACITOR	4.7	50V
C211	QETA1HM 475	E.CAPACITOR	4.7	50V
C212	QETA1HM 475	E.CAPACITOR	4.7	50V
C213	QCYA1HK 472	CER.CAPACITOR	4700P	50V
C214	QCYA1HK 472	CER.CAPACITOR	4700P	50V
C215	QCYA1HK 472	CER.CAPACITOR	4700P	50V
C216	QCFA1EZ 104	CER.CAPACITOR	0.10	25V
C217	QCFA1EZ 104	CER.CAPACITOR	0.10	25V
C218	QCFA1EZ 104	CER.CAPACITOR	0.10	25V
C219	QCFA1EZ-104	CER.CAPACITOR	0.10	25V
C223	QCYA1HK 102	CER.CAPACITOR	1000P	50V
C224	QCYA1HK 102	CER.CAPACITOR	1000P	50V
C225	QCYA1HK-102	CER.CAPACITOR	1000P	50V
C226	QCYA1HK 102	CER.CAPACITOR	1000P	50V
C227	QFN41HJ 682	MY.CAPACITOR	6800P	50V
L1	PU48530 271	PEAKING COIL	270μH	
L2	PU48530 271	PEAKING COIL	270μH	
L3	PU50277	PEAKING COIL	37μH	
L4	PU48530 271	PEAKING COIL	270μH	
L21	PU50277	PEAKING COIL	37μH	

Symbol No.	Part No.	Part Name	Description
L22	PU48530-271	PEAKING COIL	270μH
L23	PU48530 271	PEAKING COIL	270μH
L25	PU48530 271	PEAKING COIL	270μH
L26	PU50277	PEAKING COIL	37μH
L27	PU48530-271	PEAKING COIL	270μH
L28	PU48530 271	PEAKING COIL	270μH
L29	PU48530 271	PEAKING COIL	270μH
L30	PU50277	PEAKING COIL	37μH
L31	PGZ01998	CHOKE COIL	33μH
L32	PGZ01990	COIL	10μH
L33	PU50277	PEAKING COIL	37μH
L34	PGZ01998	CHOKE COIL	33μH
L35	PGZ01990	COIL	10μH
⚠ X1	PEVB0335	CRYSTAL	
CN1	PU59973 18	CONNECTOR	18PIN
CN2	PU59555 3	CONNECTOR	3PIN
CN3	PU59555-8	CONNECTOR	8PIN
CN4	PU59555-10	CONNECTOR	10PIN
CN5	PU59555 10	CONNECTOR	10PIN
CN6	PU59555 5	CONNECTOR	5PIN
CN7	PU59973-18	CONNECTOR	18PIN
CN21	PU59555 5	CONNECTOR	5PIN
CN22	PU59555 4	CONNECTOR	4PIN
CN23	PU59555 2	CONNECTOR	2PIN
CN24	PU59555-2	CONNECTOR	2PIN
CN25	PU59555 6	CONNECTOR	6PIN
CN26	PU59555 9	CONNECTOR	9PIN
CN27	PU59555 4	CONNECTOR	4PIN
CN28	PU59555-3	CONNECTOR	3PIN
CN29	PU59555 10	CONNECTOR	10PIN
CN30	PU59555 7	CONNECTOR	7PIN
CN31	PU59555-10	CONNECTOR	10PIN
CN32	PU59555 7	CONNECTOR	7PIN
TP1	SQMX001-001	TEST POINT	
CP1	ICP F10	I.C.PROTECTOR	
CP2	ICP-F10	I.C.PROTECTOR	
CP3	ICP F10	I.C.PROTECTOR	
⚠ K1	PU60281-2	FERRITE BEADS	
⚠ K2	PU60281 2	FERRITE BEADS	
HS1	PQ45789	HEAT SINK	
SP1	PGZ00150	SPACER	
S1	SBSB3008Z	SCREW	M3 x 8
⚠ K1	PGZ02003	FERRITE CORE	
HS2	PQ45789	HEAT SINK	

Symbol No.	Part No.	Part Name	Description
S2	SBSB3010Z	SCREW	M3 x 10
SL2	PRS20010	SHIELD CASE	

6.12 SYSTEM CONTROL BOARD ASSEMBLY LIST [3][1]

PRK20214A-01 (BR-S800)

PRK20214B-01 (BR-S500) [3][1]

Symbol No.	Part No.	Part Name	Description
IC1	SC78148GF-026	I.C.(M)	NEC
IC2	PGD30620C 11 7	I.C.(M)	M27C512-15F1
SK2	PGZ01724 028	IC SOCKET	28PIN
IC3	BR24C01AF	I.C.(M)	ROHM
IC4	TC74HC373AF	I.C.(M)	TOSHIBA
IC5	TC74HC00AF	I.C.(M)	TOSHIBA
IC6	TC74HC00AF	I.C.(M)	TOSHIBA
IC7	TC74HC04AF	I.C.(M)	TOSHIBA
IC8	TC74HC30AF	I.C.(M)	TOSHIBA
IC9	M51957BFP	I.C.(M)	MITSUBISHI
Q1	DTC144EK	TRANSISTOR	ROHM
D1	DA204K	DIODE	ROHM
D2	DA204K	DIODE	ROHM
D3	DA204K	DIODE	ROHM
D4	DA204K	DIODE	ROHM
D5	DA204K	DIODE	ROHM
R6	QRSA08J-101	M.G.RESISTOR	100 1/10W
R7	QRSA08J 101	M.G.RESISTOR	100 1/10W
R8	QRSA08J 101	M.G.RESISTOR	100 1/10W
R9	QRSA08J-101	M.G.RESISTOR	100 1/10W
R10	QRSA08J-101	M.G.RESISTOR	100 1/10W
R11	QRSA08J-101	M.G.RESISTOR	100 1/10W
R12	QRSA08J 101	M.G.RESISTOR	100 1/10W
R13	QRSA08J-101	M.G.RESISTOR	100 1/10W
R14	QRSA08J 101	M.G.RESISTOR	100 1/10W
R15	QRSA08J-101	M.G.RESISTOR	100 1/10W
R16	QRSA08J-101	M.G.RESISTOR	100 1/10W
R17	QRSA08J-101	M.G.RESISTOR	100 1/10W
R18	QRSA08J-101	M.G.RESISTOR	100 1/10W
R19	QRSA08J-101	M.G.RESISTOR	100 1/10W
R20	QRSA08J-101	M.G.RESISTOR	100 1/10W
R21	QRSA08J-101	M.G.RESISTOR	100 1/10W
R22	QRSA08J 101	M.G.RESISTOR	100 1/10W
R23	QRSA08J-101	M.G.RESISTOR	100 1/10W
R24	QRSA08J-101	M.G.RESISTOR	100 1/10W
R25	QRSA08J-101	M.G.RESISTOR	100 1/10W
R26	QRSA08J-101	M.G.RESISTOR	100 1/10W
R27	QRSA08J-101	M.G.RESISTOR	100 1/10W
R28	QRSA08J-101	M.G.RESISTOR	100 1/10W
R29	QRSA08J-101	M.G.RESISTOR	100 1/10W
R30	QRSA08J-101	M.G.RESISTOR	100 1/10W
R31	QRSA08J-101	M.G.RESISTOR	100 1/10W
R32	QRSA08J-101	M.G.RESISTOR	100 1/10W
R33	QRSA08J-101	M.G.RESISTOR	100 1/10W
R34	QRSA08J-101	M.G.RESISTOR	100 1/10W
R35	QRSA08J-102	M.G.RESISTOR	1.0K 1/10W
R36	QRSA08J-101	M.G.RESISTOR	100 1/10W
R37	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R41	QRSA08J-101	M.G.RESISTOR	100 1/10W
R42	QRSA08J-101	M.G.RESISTOR	100 1/10W
R43	QRSA08J-101	M.G.RESISTOR	100 1/10W

Symbol No.	Part No.	Part Name	Description
R45	QRSA08J 101	M.G.RESISTOR	100 1/10W
R46	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W
R50	QRSA08J-333	M.G.RESISTOR	33K 1/10W
R51	QRSA08J-333	M.G.RESISTOR	33K 1/10W
R52	QRSA08J 333	M.G.RESISTOR	33K 1/10W
R53	QRSA08J 333	M.G.RESISTOR	33K 1/10W
R55	QRSA08J 473	M.G.RESISTOR	47K 1/10W BR-S500
R57	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R60	QRSA08J 183	M.G.RESISTOR	18K 1/10W
R61	QRSA08J-273	M.G.RESISTOR	27K 1/10W
R62	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R64	QRSA08J 102	M.G.RESISTOR	1.0K 1/10W
R65	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R66	QRSA08J 472	M.G.RESISTOR	4.7K 1/10W
R67	QRSA08J 472	M.G.RESISTOR	4.7K 1/10W
R68	QRSA08J 473	M.G.RESISTOR	47K 1/10W
R69	QRSA08J 473	M.G.RESISTOR	47K 1/10W
R70	QRSA08J 472	M.G.RESISTOR	4.7K 1/10W
R71	QRSA08J 472	M.G.RESISTOR	4.7K 1/10W
R72	QRSA08J 472	M.G.RESISTOR	4.7K 1/10W
R73	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R74	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R75	QRSA08J 473	M.G.RESISTOR	47K 1/10W
R76	QRSA08J 473	M.G.RESISTOR	47K 1/10W
R77	QRSA08J 473	M.G.RESISTOR	47K 1/10W
R78	QRSA08J-473	M.G.RESISTOR	47K 1/10W
R80	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R81	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R82	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R83	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R84	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R85	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R86	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R91	QRSA08J 0R0	M.G.RESISTOR	0 1/10W BR S800
R92	QRSA08J 0R0	M.G.RESISTOR	0 1/10W
R95	QRSA08J 0R0	M.G.RESISTOR	0 1/10W
R101	QRSA08J 473	M.G.RESISTOR	47K 1/10W
R111	QRSA08J 101	M.G.RESISTOR	100 1/10W
R112	QRSA08J 101	M.G.RESISTOR	100 1/10W
R113	QRSA08J 101	M.G.RESISTOR	100 1/10W
R114	QRSA08J 101	M.G.RESISTOR	100 1/10W
R115	QRSA08J-101	M.G.RESISTOR	100 1/10W
R116	QRSA08J 101	M.G.RESISTOR	100 1/10W
R117	QRSA08J 101	M.G.RESISTOR	100 1/10W
R118	QRSA08J 101	M.G.RESISTOR	100 1/10W
R119	QRSA08J-101	M.G.RESISTOR	100 1/10W
R120	QRSA08J 101	M.G.RESISTOR	100 1/10W
R121	QRSA08J 101	M.G.RESISTOR	100 1/10W
R122	QRSA08J-101	M.G.RESISTOR	100 1/10W
R123	QRSA08J-101	M.G.RESISTOR	100 1/10W
R124	QRSA08J 101	M.G.RESISTOR	100 1/10W
R125	QRSA08J 101	M.G.RESISTOR	100 1/10W
R126	QRSA08J-101	M.G.RESISTOR	100 1/10W
C1	QER41CM 226	E.CAPACITOR	22 16V
C2	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C3	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C4	QCYA1HK 103	CER.CAPACITOR	0.010 50V
C5	QCYA1HK 103	CER.CAPACITOR	0.010 50V

Symbol No.	Part No.	Part Name	Description
C6	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C7	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C8	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C9	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C12	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C13	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C14	QCYA1EK-104	CER.CAPACITOR	0.10 25V
C15	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C16	QCTA1CH-220	CER.CAPACITOR	22P 50V
C17	QCTA1CH-220	CER.CAPACITOR	22P 50V
C18	QCYA1HK-221	CER.CAPACITOR	220P 50V
C19	QCYA1HK-221	CER.CAPACITOR	220P 50V
C20	QCYA1HK-221	CER.CAPACITOR	220P 50V
C21	QCYA1HK-221	CER.CAPACITOR	220P 50V
C23	QCYA1HK-221	CER.CAPACITOR	220P 50V
C26	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C30	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C31	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C32	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C33	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C34	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C35	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C36	QCYA1HK-102	CER.CAPACITOR	1000P 50V
C51	QCTA1CH-101	CER.CAPACITOR	100P 50V
C52	QCTA1CH-101	CER.CAPACITOR	100P 50V
C53	QCTA1CH-101	CER.CAPACITOR	100P 50V
C54	QCTA1CH-101	CER.CAPACITOR	100P 50V
C55	QCTA1CH-101	CER.CAPACITOR	100P 50V
C56	QCTA1CH-101	CER.CAPACITOR	100P 50V
C57	QCTA1CH-101	CER.CAPACITOR	100P 50V
C58	QCTA1CH-101	CER.CAPACITOR	100P 50V
C59	QCTA1CH-101	CER.CAPACITOR	100P 50V
C61	QCTA1CH-101	CER.CAPACITOR	100P 50V
C62	QCTA1CH-101	CER.CAPACITOR	100P 50V
C63	QCTA1CH-101	CER.CAPACITOR	100P 50V
C64	QCTA1CH-101	CER.CAPACITOR	100P 50V
C65	QCTA1CH-101	CER.CAPACITOR	100P 50V
C66	QCTA1CH-101	CER.CAPACITOR	100P 50V
C67	QCTA1CH-101	CER.CAPACITOR	100P 50V
C68	QCTA1CH-101	CER.CAPACITOR	100P 50V
C69	QCTA1CH-101	CER.CAPACITOR	100P 50V
C70	QCTA1CH-101	CER.CAPACITOR	100P 50V
C71	QCTA1CH-101	CER.CAPACITOR	100P 50V
C72	QCTA1CH-101	CER.CAPACITOR	100P 50V
C73	QCTA1CH-101	CER.CAPACITOR	100P 50V
C74	QCTA1CH-101	CER.CAPACITOR	100P 50V
C75	QCTA1CH-101	CER.CAPACITOR	100P 50V
C76	QCTA1CH-101	CER.CAPACITOR	100P 50V
C77	QCTA1CH-101	CER.CAPACITOR	100P 50V
L1	PGZ00617-221	CHOKE COIL	220μH
⚠ X1	PGZ00513	CERAMIC FILTER	
CN1	PGZ01937-64	CONNECTOR	64PIN

Symbol No.	Part No.	Part Name	Description
⚠ K1	QRD161J-0R0	CARBON RESISTOR	0 1/6W
⚠ K2	PGZ00354	FERRATE BEADS	
SL1	PRS30039	SHIELD CASE	
SL2	PRD44318	SHIELD PLATE	

6.13 OPERATION CPU BOARD ASSEMBLY LIST [3][2]

PRK10151A1-02 [3][2]□□□□□□

Symbol No.	Part No.	Part Name	Description
Q1	DTC114EK	TRANSISTOR	ROHM
R2	QRSA08J-121	M.G.RESISTOR	120 1/10W
R3	QRSA08J-121	M.G.RESISTOR	120 1/10W
R20	QRSA08J-681	M.G.RESISTOR	680 1/10W
R21	QRSA08J-681	M.G.RESISTOR	680 1/10W
R22	QRSA08J-681	M.G.RESISTOR	680 1/10W
R23	QRSA08J 681	M.G.RESISTOR	680 1/10W
C1	QER41CM-476	E.CAPACITOR	47 16V
C2	QCYA1HK 223	CER.CAPACITOR	0.022 50V
C3	QER41CM-476	E.CAPACITOR	47 16V
C4	QCYA1HK-223	CER.CAPACITOR	0.022 50V
L1	PGZ00617 221	CHOKE COIL	220μH
L2	PGZ00617-221	CHOKE COIL	220μH
CN1	PGZ01942-10	CONNECTOR	10PIN
CN2	PGZ01942-10	CONNECTOR	10PIN
CN3	PGZ01942-10	CONNECTOR	10PIN
CN4	PGZ01942-10	CONNECTOR	10PIN
CN5	PU59973-18	CONNECTOR	18PIN
CN6	PU59973-24	CONNECTOR	24PIN
CN7	PU59973-18	CONNECTOR	18PIN
MT1	PGZ01337-02	METER	AUD-L
MT2	PGZ01336-02	METER	TR/AUD-R
SL1	PRD30597	SHADE	for MT1
SL2	PRD30597	SHADE	for MT2
D1	SLV-56YC3F	LED	
D2	SLV-56YC3F	LED	
D3	SLV-56YC3F	LED	
D6	SLV-56YC3F	LED	
D7	SLV-56YC3F	LED	
D8	SLV-56YC3F	LED	

6.14 OPERATION VR BOARD ASSEMBLY LIST [3][3]

PRK10151A2-04 (BR-S800)

PRK10151B2-04 (BR-S500) [3][3]□□□□□□

Symbol No.	Part No.	Part Name	Description
IC11	M5218AFP	I.C.(M)	MITSUBISHI
IC12	BA3308F	I.C.(M)	ROHM BR-S800
Q11	DTA144EK	TRANSISTOR	ROHM
Q12	DTC144EK	TRANSISTOR	ROHM
Q13	DTC323TK	TRANSISTOR	ROHM
Q14	DTC323TK	TRANSISTOR	ROHM
D11	DAN202K	DIODE	ROHM
D12	DAN202K	DIODE	ROHM
D13	DAN202K	DIODE	ROHM
R36	QRSA08J-332	M.G.RESISTOR	3.3K 1/10W BR-S800
R37	QRSA08J-392	M.G.RESISTOR	3.9K 1/10W BR-S800
R38	QRSA08J-105	M.G.RESISTOR	1.0M 1/10W BR-S800
R39	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W BR-S800
R40	QRSA08J-152	M.G.RESISTOR	1.5K 1/10W BR-S800
R41	QRSA08J-823	M.G.RESISTOR	82K 1/10W BR-S800
R42	QRSA08J-221	M.G.RESISTOR	220 1/10W BR-S800
R51	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R52	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R53	QRSA08J-222	M.G.RESISTOR	2.2K 1/10W
R56	QRSA08J-330	M.G.RESISTOR	33 1/10W
R57	QRSA08J-103	M.G.RESISTOR	10K 1/10W
R60	QRSA08J 103	M.G.RESISTOR	10K 1/10W
R61	QRSA08J-330	M.G.RESISTOR	33 1/10W
R64	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R65	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R66	QRSA08J 104	M.G.RESISTOR	100K 1/10W
R67	QRZ0077-101	UNF RESISTOR	100
R68	QRSA08J-104	M.G.RESISTOR	100K 1/10W
R171	QRSA08J-121	M.G.RESISTOR	120 1/10W
R172	QRSA08J-121	M.G.RESISTOR	120 1/10W
R173	QRSA08J-121	M.G.RESISTOR	120 1/10W
R174	QRSA08J-121	M.G.RESISTOR	120 1/10W
R175	QRSA08J-121	M.G.RESISTOR	120 1/10W
R176	QRSA08J-121	M.G.RESISTOR	120 1/10W
R181	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R182	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R183	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R184	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R185	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R186	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R187	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R188	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R189	QRSA08J-0R0	M.G.RESISTOR	0 1/10W
R190	QRSA08J 0R0	M.G.RESISTOR	0 1/10W
VR11	PGZ01964	TRIM.RESISTOR	AUD1 BR-S800
VR12	PGZ01964	TRIM.RESISTOR	AUD2 BR-S800
VR13	PGZ01964	TRIM.RESISTOR	AUD3 BR-S800
VR14	PGZ01964	TRIM.RESISTOR	AUD4 BR-S800
VR15	PGZ01966	TRIM.RESISTOR	TRACKING
VR16	PGZ01965	TRIM.RESISTOR	LEVEL
C7	QCTA1CH-101	CER.CAPACITOR	100P 50V BR-S800
C8	QER41HM 105	E.CAPACITOR	1.0 50V BR-S800

6.15 OPERATION SW BOARD ASSEMBLY LIST 3 4

PRK10151A3-02 (BR-S800)

PRK10151B3-02 (BR-S500) 3 4

Symbol No.	Part No.	Part Name	Description
C9	QER41CM-476	E.CAPACITOR	47 16V BR-S800
C10	QCTA1CH-101	CER.CAPACITOR	100P 50V BR-S800
C11	QCTA1CH-121	CER.CAPACITOR	120P 50V BR-S800
C12	QER41CM-106	E.CAPACITOR	10 16V BR-S800
C13	QCTA1CH-101	CER.CAPACITOR	100P 50V BR-S800
C14	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S800
C15	QCYA1HK-103	CER.CAPACITOR	0.010 50V BR-S800
C52	QCYA1HK-103	CER.CAPACITOR	0.010 50V
C53	QER41AM-476	E.CAPACITOR	47 10V
C57	QER41CM-475	E.CAPACITOR	4.7 16V
C58	QER41CM-475	E.CAPACITOR	4.7 16V
C59	QER41CM-476	E.CAPACITOR	47 16V
C60	QER41AM-476	E.CAPACITOR	47 10V
CP1	ICP-F25	I.C.PROTECTOR	
⚠ K1	PU60281-2	FERRITE BEADS	
⚠ K2	PGZ01976	FILTER	
⚠ K3	PGZ01976	FILTER	
⚠ K4	PU60281-2	FERRITE BEADS	
⚠ K5	PGZ01976	FILTER	
⚠ K6	PGZ01976	FILTER	
⚠ K7	PGZ01976	FILTER	
⚠ K8	PGZ01976	FILTER	
SW1	PGZ01478	SLIDE SWITCH	TRACKING/AUD2 R
SW2	PGZ00470-02	SLIDE SWITCH	AUD1/MIX/AUD2
SW3	PGZ00469-02	SLIDE SWITCH	HF / NOR
SW4	PGZ00469-02	SLIDE SWITCH	YC / LINE BR-S800
SW5	PGZ00470-02	SLIDE SWITCH	CTL / TC / U
SW6	PGZ00469-02	SLIDE SWITCH	LOCAL / REM
J1	PU60664	MINI JACK	HEAD PHONE
J2	PU60664-3	MINI JACK	MIC BR-S800
J3	PGZ02036	CONNECTOR	REMOTE BR-S800
J4	PGZ01947	JACK	1P REMOTE
CN11	PU60711-118	CONNECTOR	18PIN
CN12	PU60711-124	CONNECTOR	24PIN
⚠ VA1	PU49624-2	VARISTOR	
SL1	PRD42674	SHIELD PLATE	BR-S800
S1	SDSF3010Z	SCREW	M3 x 10 BR-S800
BK1	PRD44290-01-01	BRACKET	

Symbol No.	Part No.	Part Name	Description
IC21	M50255P	I.C.(M)	MITSUBISHI
Q21	DTB143TK	TRANSISTOR	ROHM
Q22	DTB143TK	TRANSISTOR	ROHM
Q23	DTB143TK	TRANSISTOR	ROHM
Q24	DTB143TK	TRANSISTOR	ROHM
Q25	DTB143TK	TRANSISTOR	ROHM
Q26	DTB143TK	TRANSISTOR	ROHM
Q27	DTB143TK	TRANSISTOR	ROHM
Q28	DTB143TK	TRANSISTOR	ROHM
Q29	DTC144EK	TRANSISTOR	ROHM
Q30	DTC144EK	TRANSISTOR	ROHM
Q31	DTC144EK	TRANSISTOR	ROHM
Q32	DTC144EK	TRANSISTOR	ROHM
Q33	DTC144EK	TRANSISTOR	ROHM
Q34	DTC144EK	TRANSISTOR	ROHM
Q35	DTC144EK	TRANSISTOR	ROHM
Q36	DTC144EK	TRANSISTOR	ROHM
D31	SLR-55MC3F	L.E.D.	
SP31	PU50633-3	LED SPACER	
D32	SLR-55MC3F	L.E.D.	
SP32	PU50633-3	LED SPACER	
D33	SLR-55MC3F	L.E.D.	
SP33	PU50633-3	LED SPACER	
D34	SLR-55MC3F	L.E.D.	
SP34	PU50633-3	LED SPACER	
D35	SLR-55MC3F	L.E.D.	
SP35	PU50633-3	LED SPACER	
D36	SLR-55MC3F	L.E.D.	
SP36	PU50633-3	LED SPACER	
D37	SLR-55MC3F	L.E.D.	
SP37	PU50633-3	LED SPACER	
D38	GL-8TR21	L.E.D.	

[OPERATION SW]

Symbol No.	Part No.	Part Name	Description
SP38	PQ43191	LED HOLDER	
D39	GL-8TR21	L.E.D.	BR-S800
SP39	PQ43191	LED HOLDER	BR-S800
D40	GL-8TR21	L.E.D.	BR-S800
SP40	PQ43191	LED HOLDER	BR-S800
D41	GL-8TR21	L.E.D.	
SP41	PQ43191	LED HOLDER	
D42	GL-8TR21	L.E.D.	
SP42	PQ43191	LED HOLDER	
D43	GL-8TR21	L.E.D.	
SP43	PQ43191	LED HOLDER	
D44	GL-8TR21	L.E.D.	
SP44	PQ43191	LED HOLDER	
D45	GL-8TR21	L.E.D.	
SP45	PQ43191	LED HOLDER	
D46	GL-8TR21	L.E.D.	
SP46	PQ43191	LED HOLDER	
D61	DAN202K	DIODE	ROHM
D62	DAN202K	DIODE	ROHM
D63	DAN202K	DIODE	ROHM
D64	DAN202K	DIODE	ROHM
D65	DAN202K	DIODE	ROHM
D66	DAN202K	DIODE	ROHM
D67	DAN202K	DIODE	ROHM
D68	DAN202K	DIODE	ROHM
D81	DAN202K	DIODE	ROHM
D82	DAN202K	DIODE	ROHM
D83	DAN202K	DIODE	ROHM
D84	DAN202K	DIODE	ROHM
D85	DAN202K	DIODE	ROHM

Symbol No.	Part No.	Part Name	Description
D91	LB-302VF2	L.E.D.	
SP91	PRD44204	LED SPACER	
D92	LB-302VF2	L.E.D.	
SP92	PRD44204	LED SPACER	
D93	LB-302VF2	L.E.D.	
SP93	PRD44204	LED SPACER	
R71	QRSA08J-221	M.G.RESISTOR	220 1/10W
R72	QRSA08J-221	M.G.RESISTOR	220 1/10W
R73	QRSA08J-221	M.G.RESISTOR	220 1/10W
R74	QRSA08J-221	M.G.RESISTOR	220 1/10W
R75	QRSA08J-221	M.G.RESISTOR	220 1/10W
R76	QRSA08J-221	M.G.RESISTOR	220 1/10W
R77	QRSA08J-221	M.G.RESISTOR	220 1/10W
R78	QRSA08J-221	M.G.RESISTOR	220 1/10W
R79	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R80	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R81	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R82	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R83	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R84	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R85	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R86	QRSA08J-472	M.G.RESISTOR	4.7K 1/10W
R87	QRSA08J-101	M.G.RESISTOR	100 1/10W
R88	QRSA08J-101	M.G.RESISTOR	100 1/10W
R91	QRSA08J-221	M.G.RESISTOR	220 1/10W
R92	QRSA08J-221	M.G.RESISTOR	220 1/10W
R93	QRSA08J-221	M.G.RESISTOR	220 1/10W
R94	QRSA08J-221	M.G.RESISTOR	220 1/10W
R95	QRSA08J-221	M.G.RESISTOR	220 1/10W
R96	QRSA08J-221	M.G.RESISTOR	220 1/10W
R97	QRSA08J-221	M.G.RESISTOR	220 1/10W
R98	QRSA08J-221	M.G.RESISTOR	220 1/10W
C71	QCYA1HK 103	CER.CAPACITOR	0.010 50V
SW11	PESW0525-02	TACT SWITCH	AUTO MODE
SW12	PESW0525-02	TACT SWITCH	IN / + SHIFT
SW13	PESW0525-02	TACT SWITCH	OUT / - SHIFT
SW14	PESW0525-02	TACT SWITCH	EJECT
SW15	PESW0525-02	TACT SWITCH	REW
SW16	PESW0525-02	TACT SWITCH	STOP
SW17	PESW0525-02	TACT SWITCH	FF
SW18	PESW0525 02	TACT SWITCH	COUNTER RESET
SW19	PESW0525-02	TACT SWITCH	MENU
SW20	PESW0525-02	TACT SWITCH	SET
SW21	PESW0525-02	TACT SWITCH	ADU BR-S800
SW22	PESW0525-02	TACT SWITCH	REC BR-S800
SW23	PESW0525-02	TACT SWITCH	PLAY

6.16 OPERATION DIAL BOARD ASSEMBLY LIST [3][5]

PRK10151A4-02 [3][5]

Symbol No.	Part No.	Part Name	Description
SW24	PESW0525-02	TACT SWITCH	PAUSE / STILL
CN21	PU60711-118	CONNECTOR	18PIN
CN22	PU60910-6	CONNECTOR	6PIN

Symbol No.	Part No.	Part Name	Description
SW31	PGZ00153-1-1	R.CODE SWITCH	SEARCH DIAL
⚠ LF1	PGZ01229	LINE FILTER	
FW1	PGW0109 90AC556	FLAT WIRE	

6.17 REAR BOARD ASSEMBLY LIST [4][0]

PRK20234C-04 (BR-S800)

PRK20234B-04 (BR-S500) [4][0]

Symbol No.	Part No.	Part Name	Description	
D1	RD10ES	ZENER DIODE	NEC	BR-S800
D2	RD10ES	ZENER DIODE	NEC	BR S800
D3	RD10ES	ZENER DIODE	NEC	BR S800
D4	RD10ES	ZENER DIODE	NEC	BR-S800
D5	RD10ES	ZENER DIODE	NEC	
D6	RD10ES	ZENER DIODE	NEC	
D7	RD10ES	ZENER DIODE	NEC	
D8	RD10ES	ZENER DIODE	NEC	
D9	RD10ES	ZENER DIODE	NEC	BR-S800
D10	RD10ES	ZENER DIODE	NEC	BR S800
D11	RD10ES	ZENER DIODE	NEC	BR S800
D12	RD10ES	ZENER DIODE	NEC	BR-S800
D13	RD10ES	ZENER DIODE	NEC	
D14	RD10ES	ZENER DIODE	NEC	
D15	RD10ES	ZENER DIODE	NEC	
D16	RD10ES	ZENER DIODE	NEC	
D17	RD10ES	ZENER DIODE	NEC	
D18	RD10ES	ZENER DIODE	NEC	
D19	RD10ES	ZENER DIODE	NEC	
D20	RD10ES	ZENER DIODE	NEC	
D21	RD10ES	ZENER DIODE	NEC	BR S800
D22	RD10ES	ZENER DIODE	NEC	BR-S800
D23	RD10ES	ZENER DIODE	NEC	
D24	RD10ES	ZENER DIODE	NEC	
D25	RD10ES	ZENER DIODE	NEC	
D26	RD10ES	ZENER DIODE	NEC	
D27	RD10ES	ZENER DIODE	NEC	BR S800
D28	RD10ES	ZENER DIODE	NEC	BR S800
D29	RD10ES	ZENER DIODE	NEC	BR S800
D30	RD10ES	ZENER DIODE	NEC	BR-S800
D31	RD10ES	ZENER DIODE	NEC	
D32	RD10ES	ZENER DIODE	NEC	
D33	RD10ES	ZENER DIODE	NEC	
D34	RD10ES	ZENER DIODE	NEC	
R1	QRD161J-750	CARBON RESISTOR	75	1/6W
SW1	PGZ00469-02	SLIDE SWITCH	TIMER P	BR-S500
SW2	PGZ00470-02	SLIDE SWITCH	TIMER / REC PB	BR-S800
CN1	PGZ01942-10	CONNECTOR	10PIN	
CN2	PGZ01942-10	CONNECTOR	10PIN	
CN3	PGZ01942-10	CONNECTOR	10PIN	
CN4	PGZ01942-10	CONNECTOR	10PIN	
JA1	PGZ01531	CONNECTOR	S IN	BR-S800
JA2	PGZ01531	CONNECTOR	S OUT	
JA3	PGZ01948	4P BNC CONN.	LINE IN / OUT	BR S800
	PGZ01950	CONNECTOR	3P BNC VIDEO/SY	BR-S500
JA4	PGZ01947	1P JACK	AUD MONITOR	
JA5	PGZ01946	4P JACK	HIFI IN / OUT	BR S800
	PGZ01949	JACK	2P HIFI L/R	BR-S500
JA6	PGZ01946	4P JACK	NORM IN / OUT	BR-S800
	PGZ01949	JACK	2P NORM L/R	BR-S500
⚠ K3	PU60281-2	FERRITE BEADS		
⚠ K4	PU60281-2	FERRITE BEADS		

Symbol No.	Part No.	Part Name	Description	
BK1	PRD20482-03	PANEL		BR-S800
	PRD20482-04	PANEL		BR S500
S1	SDSF3010R	SCREW	M3 x 10	
S2	SDSF3012R	SCREW	M3 x 12	
S3	SDST3008Z	SCREW	M3 x 8	
S4	WBS3000N	WASHER		

6.18 END SENSOR BOARD ASSEMBLY LIST [5][0]

PRK20225A1-02 (BR-S800)

PRK20225B1-01 (BR-S500) [5][0]□□□□□□

Symbol No.	Part No.	Part Name	Description
Q1	2SD1423(RS)	TRANSISTOR	MATSUSHITA BR-S800
Q2	2SB1030RS	TRANSISTOR	MATSUSHITA BR-S800
Q3	DTC124ES	TRANSISTOR	ROHM BR-S800
D1	HZ3BLL	ZENER DIODE	HITACHI BR-S800
R1	QRD161J-223	C.RESISTOR	22K 1/6W BR S800
R2	QRD161J-6R8	C.RESISTOR	6.8 1/6W BR-S800
R3	QRD16'J-473	C.RESISTOR	47K 1/6W BR-S800
R4	QRD16'J-472	C.RESISTOR	4.7K 1/6W BR-S800
C1	QFN41HJ-332	MY.CAPACITOR	3300P 50V BR-S800
C2	QFN41HJ-102	MY.CAPACITOR	1000P 50V BR-S800
C3	QFP42AJ 333	P.P.CAPACITOR	0.033 100V BR S800
C4	QETA1CM-106	E.CAPACITOR	10 16V BR-S800
PS1	PU61321-1-1	TAPE SENSOR	
T1	PU60321	TRANSFORMER	BR S800
CN1	PU59555-2	CONNECTOR	2PIN
CN2	PU59555-5	CONNECTOR	5PIN BR-S500

6.19 REC SAFETY (BR-S800) BOARD ASSEMBLY LIST [5][1]

PRK20225A2-01 [5][1]□□□□□□

Symbol No.	Part No.	Part Name	Description
SW1	PU61319	SWITCH	REC SAFETY
CN3	PU59555-102	CONNECTOR	2PIN

6.20 S-SWITCH (BR-S800) BOARD ASSEMBLY LIST [52]

PRK20225A4 [52]

Symbol No.	Part No.	Part Name	Description
SW1	PU61008	SWITCH	CASSETE SWITCH
CN4	PU59555-102	CONNECTOR	2PIN

6.21 MODE MOTOR BOARD ASSEMBLY LIST [53]

PRK20225A3 [53]

Symbol No.	Part No.	Part Name	Description
C5	QCF31HP 223	CER.CAPACITOR	0.022 50V
CN5	PU59555-2	CONNECTOR	2PIN

6.22 CASSETTE HOUSING BOARD ASSEMBLY LIST [54]

PRK20255A-01 [54]

Symbol No.	Part No.	Part Name	Description
Q1	PN268VI	PHOTO TRANSISTO	MATSUSHITA
SW1	YU40177-2	PUSH SWITCH	CASSETTE SWITCH
SW2	YU40177-2	PUSH SWITCH	INSERT SWITCH
CN1	PU59555-106	CONNECTOR	6PIN

6.23 MECHA-TERMINAL BOARD ASSEMBLY LIST [55]

PRK20225A5 [55]

Symbol No.	Part No.	Part Name	Description
CN6	PU59555-9	CONNECTOR	9PIN
CN7	PU59555-2	CONNECTOR	2PIN
CN8	PU59555-2	CONNECTOR	2PIN
CN9	PU59555-2	CONNECTOR	2PIN
CN10	PU59555-3	CONNECTOR	3PIN

6.24 A/C HEAD BOARD ASSEMBLY LIST [56]

PRK20225A6 [56]

Symbol No.	Part No.	Part Name	Description
CN11	PU59555-111	CONNECTOR	11PIN

6.25 PRIMARY BOARD ASSEMBLY LIST [60]

PRK10157A1 [60]

Symbol No.	Part No.	Part Name	Description
C2	QCZ9016-222	CER.CAPACITOR	2200P 125V
C3	QCZ9016-222	CER.CAPACITOR	2200P 125V
C6	QFZ9022-333	M.M.CAP	0.033 125V
LF2	PELN0678	LINE FILTER	
J5	PU60894-103	TERMINAL	
J6	PU60894-103	TERMINAL	
J7	PU60894-103	TERMINAL	
CN1	PGZ01956-002	CONNECTOR	2PIN
CN2	PGZ01955-102	CONNECTOR	2PIN
⚠FC1	PU57505	FUSE CLIP	
⚠FC2	PU57505	FUSE CLIP	

6.26 SWITCHING REGULATER BOARD ASSEMBLY LIST [6][1]

PRK10157B2 [6][1]□□□□□□

Symbol No.	Part No.	Part Name	Description	
IC1	FA5311P	I.C.(M)	KYODO DENKI	
IC7	BA10358F	I.C.(M)	ROHM	
Q1	2SK1102	F.E.T.	FUJI ELECTRIC	
Q37	2SC4081(QRS)	TRANSISTOR	ROHM	
D1	AG01	DIODE	SANEKN	
D2	AG01	DIODE	SANEKN	
D3	RD27ES	ZENER DIODE	NEC	
D4	RD5.1ES	ZENER DIODE	NEC	
D5	1SS133	DIODE	ROHM	
D6	RD24ES	ZENER DIODE	NEC	
D7	1SR153 200	DIODE	ROHM	
D20	FML-12S	DIODE	SANKEN	
D24	FMB-24	DIODE	SANKEN	
D27	MA689	DIODE	MATSUSHITA	
D29	FML 12S	DIODE	SANKEN	
D30	HZ22CP	ZENER DIODE	HITACHI	
D31	FML-12S	DIODE	SANKEN	
D33	FMB-24	DIODE	SANKEN	
D36	1SS133	DIODE	ROHM	
D37	1SS133	DIODE	ROHM	
D38	RD6.2ES	ZENER DIODE	NEC	
PC1	PS2501-1	PHOTO COUPLER	NEC	
DA1	RBA 402	DIODE	SANKEN	
R1	8D-13	THERMISTOR		
R2	QRD161J-104	C.RESISTOR	100K	1/6W
R3	QRD161J-104	C.RESISTOR	100K	1/6W
R4	QRG032J-683	O.M.F.RESISTOR	68K	3W
R5	QRG032J-683	O.M.F.RESISTOR	68K	3W
R6	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R7	QRG01DJ-220	O.M.F.RESISTOR	22	1W
R8	QRD161J-221	C.RESISTOR	220	1/6W
R9	QRX014J-R27	M.F.RESISTOR	0.27	1W
R10	QRX014J R27	M.F.RESISTOR	0.27	1W
R11	QRX014J-R27	M.F.RESISTOR	0.27	1W
R12	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W
R13	QRSA08J-182	M.G.RESISTOR	1.8K	1/10W
R53	QRSA08J-392	M.G.RESISTOR	3.9K	1/10W
R69	QRSA08J-331	M.G.RESISTOR	330	1/10W
R76	QRD161J-471	C.RESISTOR	470	1/6W
R77	QRSA08J-432	M.G.RESISTOR	4.3K	1/10W
R78	QRSA08J-561	M.G.RESISTOR	560	1/10W
R83	QRV144F-9761	M.F.RESISTOR	9.76K	1/4W
R84	QRV144F-1022	M.F.RESISTOR	10.2K	1/4W
R85	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R101	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
R102	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
R103	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
R104	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
C5	QCZ9016-222	CER.CAPACITOR	2200P	125V
C8	PGZ01963-477	E.CAPACITOR	470	200V

Symbol No.	Part No.	Part Name	Description	
C9	QCZ0212-472	CER.CAPACITOR	4700P	1kV
C11	QETC1HM-225	E.CAPACITOR	2.2	50V
C12	QFV11HJ-104	S.M.F.CAPACITOR	0.10	50V
C13	QFLA1HJ-471	MY.CAPACITOR	470P	50V
C14	QFV11HJ-104	S.M.F.CAPACITOR	0.10	50V
C15	QEGC1EM-336	E.CAPACITOR	33	25V
C16	QFV11HJ-394	S.M.F.CAPACITOR	0.39	50V
C17	QCFA1HZ-472	CER.CAPACITOR	4700P	50V
C18	QCZ0136-101	CER.CAPACITOR	100P	1kV
C20	QEGB1EM 108	E.CAPACITOR	1000	25V
C21	QETB1EM 108	E.CAPACITOR	1000	25V
C28	QEGB1AM 278	E.CAPACITOR	2700	10V
C29	QETB1AM 228	E.CAPACITOR	2200	10V
C33	QEGB1EM-127	E.CAPACITOR	120	25V
C34	QETC1EM 227	E.CAPACITOR	220	25V
C39	QEGB1EM 108	E.CAPACITOR	1000	25V
C40	QCFA1HZ-103	CER.CAPACITOR	0.010	50V
C42	QETC1EM-477	E.CAPACITOR	470	25V
C43	QEGB1CM 158	E.CAPACITOR	1500	16V
C44	QFV41HJ 473	S.M.F.CAPACITOR	0.047	50V
C45	QETB1CM-108	E.CAPACITOR	1000	16V
C46	QCFA1HZ 103	CER.CAPACITOR	0.010	50V
C53	QEGB1CM 687	E.CAPACITOR	680	16V
C54	QETB1CM 108	E.CAPACITOR	1000	16V
C59	QFLA1HJ 273	MY.CAPACITOR	0.027	50V
C73	PU57601 475	OS.CAP	4.7	25V
C76	PU57601 106	OS.CAP	10	16V
L20	PU60944 330	COIL	33μH	
L21	PU60944 330	COIL	33μH	
L22	PELN0270-330	COIL	33μH	
L23	PU60944-330	COIL	33μH	
L24	PU60944 330	COIL	33μH	
L25	PU60944 330	COIL	33μH	
T1	PGZ01984	TRANSFORMER		
⚠K1	PU60281-2	FERRITE BEADS		
⚠K2	PU60281 2	FERRITE BEADS		
⚠K3	PU60281-5	FERRITE BEADS		
⚠K4	PGZ01222-001	FERRITE BEADS		
J8	PEMC0742 008	CONNECTOR	8PIN	
J9	PEMC0742-010	CONNECTOR	10PIN	
J10	PEMC0742-008	CONNECTOR	8PIN	
J11	PEMC0742 008	CONNECTOR	8PIN	
K21	PU60281-2	FERRITE BEADS		
K22	PU60281 2	FERRITE BEADS		
K23	PU60281 2	FERRITE BEADS		
K24	PU60281-2	FERRITE BEADS		
K25	PU60281 2	FERRITE BEADS		
HS1	PEME0882	HEAT SINK		
S1	SDSG3008Z	SCREW	M3 x 8	

[SWITCHING REGULATER]

Symbol No.	Part No.	Part Name	Description
HS2	PRD31020-01-02	HEAT SINK	
S2	DPSP3006Z	SCREW	M3 x 6
S3	SDSP3006Z	SCREW	M3 x 6

6.27 REGULATER BOARD ASSEMBLY LIST [6][2]

PRK10157-A3 [6][2]

Symbol No.	Part No.	Part Name	Description	
IC2	BA10358F	I.C.(M)	ROHM	
IC3	BA10358F	I.C.(M)	ROHM	
IC6	BA10358F	I.C.(M)	ROHM	
IC4	UPC7912HF	I.C.(M)	NEC	
Q20	2SD1856	TRANSISTOR	ROHM	
Q22	2SD1856	TRANSISTOR	ROHM	
Q23	DTA114EU	TRANSISTOR	ROHM	
Q25	DTC114EU	TRANSISTOR	ROHM	
Q28	DTC143EU	TRANSISTOR	ROHM	
Q31	2SB941P	TRANSISTOR	MATSUSHITA	
Q32	2SA1515(QR)	TRANSISTOR	ROHM	
Q36	2SD1856	TRANSISTOR	ROHM	
Q38	2SA1576(QRS)	TRANSISTOR	ROHM	
D21	DAP202U	DIODE	ROHM	
D25	DAP202U	DIODE	ROHM	
D26	RD5.1ES	ZENER DIODE	NEC	
D34	DAP202U	DIODE	ROHM	
D35	RD5.1ES	ZENER DIODE	NEC	
D40	1SS133	DIODE	ROHM	
D41	1SS133	DIODE	ROHM	
D42	11E2	DIODE	NIPPON INTER	
R21	QRV144F-7321	M.F.RESISTOR	7.32K	1/4W
R22	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R23	QRD161J-432	C.RESISTOR	4.3K	1/6W
R25	QRX014J-R27	M.F.RESISTOR	0.27	1W
R26	QRD161J-682	C.RESISTOR	6.8K	1/6W
R27	QRD161J-432	C.RESISTOR	4.3K	1/6W
R34	QRD161J-182	C.RESISTOR	1.8K	1/6W
R35	QRD161J-752	C.RESISTOR	7.5K	1/6W
R36	QRSA08J-472	M.G.RESISTOR	4.7K	1/10W
R37	QRX014J-R22	M.F.RESISTOR	0.22	1W
R38	QRD161J-102	C.RESISTOR	1.0K	1/6W
R39	QRD161J-752	C.RESISTOR	7.5K	1/6W
R40	QRSA08J-123	M.G.RESISTOR	12K	1/10W
R41	QVPC625-202	TRIM.RESISTOR	2K	12.5V ADJ
R42	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R43	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R44	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R48	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R49	QRSA08J-822	M.G.RESISTOR	8.2K	1/10W
R54	QRSA08J-103	M.G.RESISTOR	10K	1/10W
R55	QRZ0077-470	UNF RESISTOR	47	
R57	QRV144F-8451	M.F.RESISTOR	8.45K	1/4W
R58	QRV144F-9761	M.F.RESISTOR	9.76K	1/4W
R66	QRSA08J-272	M.G.RESISTOR	2.7K	1/10W
R67	QRD161J-182	C.RESISTOR	1.8K	1/6W
R68	QRD161J-752	C.RESISTOR	7.5K	1/6W
R70	QRX014J-R22	M.F.RESISTOR	0.22	1W
R71	QRD161J-102	C.RESISTOR	1.0K	1/6W
R72	QRD161J-752	C.RESISTOR	7.5K	1/6W
R73	QRSA08J-123	M.G.RESISTOR	12K	1/10W
R74	QVPC625-202	TRIM.RESISTOR	2K	5.3V ADJ
R75	QRSA08J-222	M.G.RESISTOR	2.2K	1/10W
R79	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R80	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W
R81	QRSA08J-102	M.G.RESISTOR	1.0K	1/10W

Symbol No.	Part No.	Part Name	Description	
R82	QRSA08J-0R0	M.G.RESISTOR	0	1/10W
C22	QCYA1HK-102	CER.CAPACITOR	1000P	50V
C23	QETA1CM-108	E.CAPACITOR	1000	16V
C24	QCFA1HZ-103	CER.CAPACITOR	0.010	50V
C30	QCYA1HK-102	CER.CAPACITOR	1000P	50V
C31	QETA0JM-477	E.CAPACITOR	470	6.3V
C32	QCFA1HZ-103	CER.CAPACITOR	0.010	50V
C35	QCFA1HZ-103	CER.CAPACITOR	0.010	50V
C36	QETA1EM-475	E.CAPACITOR	4.7	25V
C37	QCFA1HZ-103	CER.CAPACITOR	0.010	50V
C38	QETA1EM-475	E.CAPACITOR	4.7	25V
C47	QETA1CM-272	E.CAPACITOR	220	16V
C48	QCFA1HZ-103	CER.CAPACITOR	0.010	50V
C55	QCFA1HZ-103	CER.CAPACITOR	0.010	50V
C56	QETA0JM-476	E.CAPACITOR	47	6.3V
C57	QETA0JM-227	E.CAPACITOR	220	6.3V
C58	QCFA1HZ-103	CER.CAPACITOR	0.010	50V
C60	QETA0JM-226	E.CAPACITOR	22	6.3V
TP1	SQMX001-001	TEST POINT		
CN3	PU59555-107	CONNECTOR	7PIN	
CN4	PU59555-105	CONNECTOR	5PIN	
CN5	PU59555-106	CONNECTOR	6PIN	
CP1	ICP-F20	I.C.PROTECTOR		
CL1	PGZ01377-03	STYLE PIN		
HS3	PRD31023	HEAT SINK		
S4	SDSP3006Z	SCREW	M3 x 6	
S5	SDSP3006Z	SCREW	M3 x 6	

6.28 LINE FILTER BOARD ASSEMBLY LIST [6][4]

PRK10157A4 [6][4]□□□□□□

Symbol No.	Part No.	Part Name	Description	
C1	QFZ9022-333	M.M.CAP	0.033	250V
C2	QFZ9022-333	M.M.CAP	0.033	250V
LF1	PELN0678	LINE FILTER		

6.29 CONNECTOR BOARD ASSEMBLY LIST [9][5]

PRK30122A [9][5]□□□□□□□

Symbol No.	Part No.	Part Name	Description
CN1	YU40106-13	CONNECTOR	13PIN
CN2	PU58250-14	CONNECTOR	14PIN